




FAVETON[®]

ventilated facade systems and wall cladding

FAVTON®

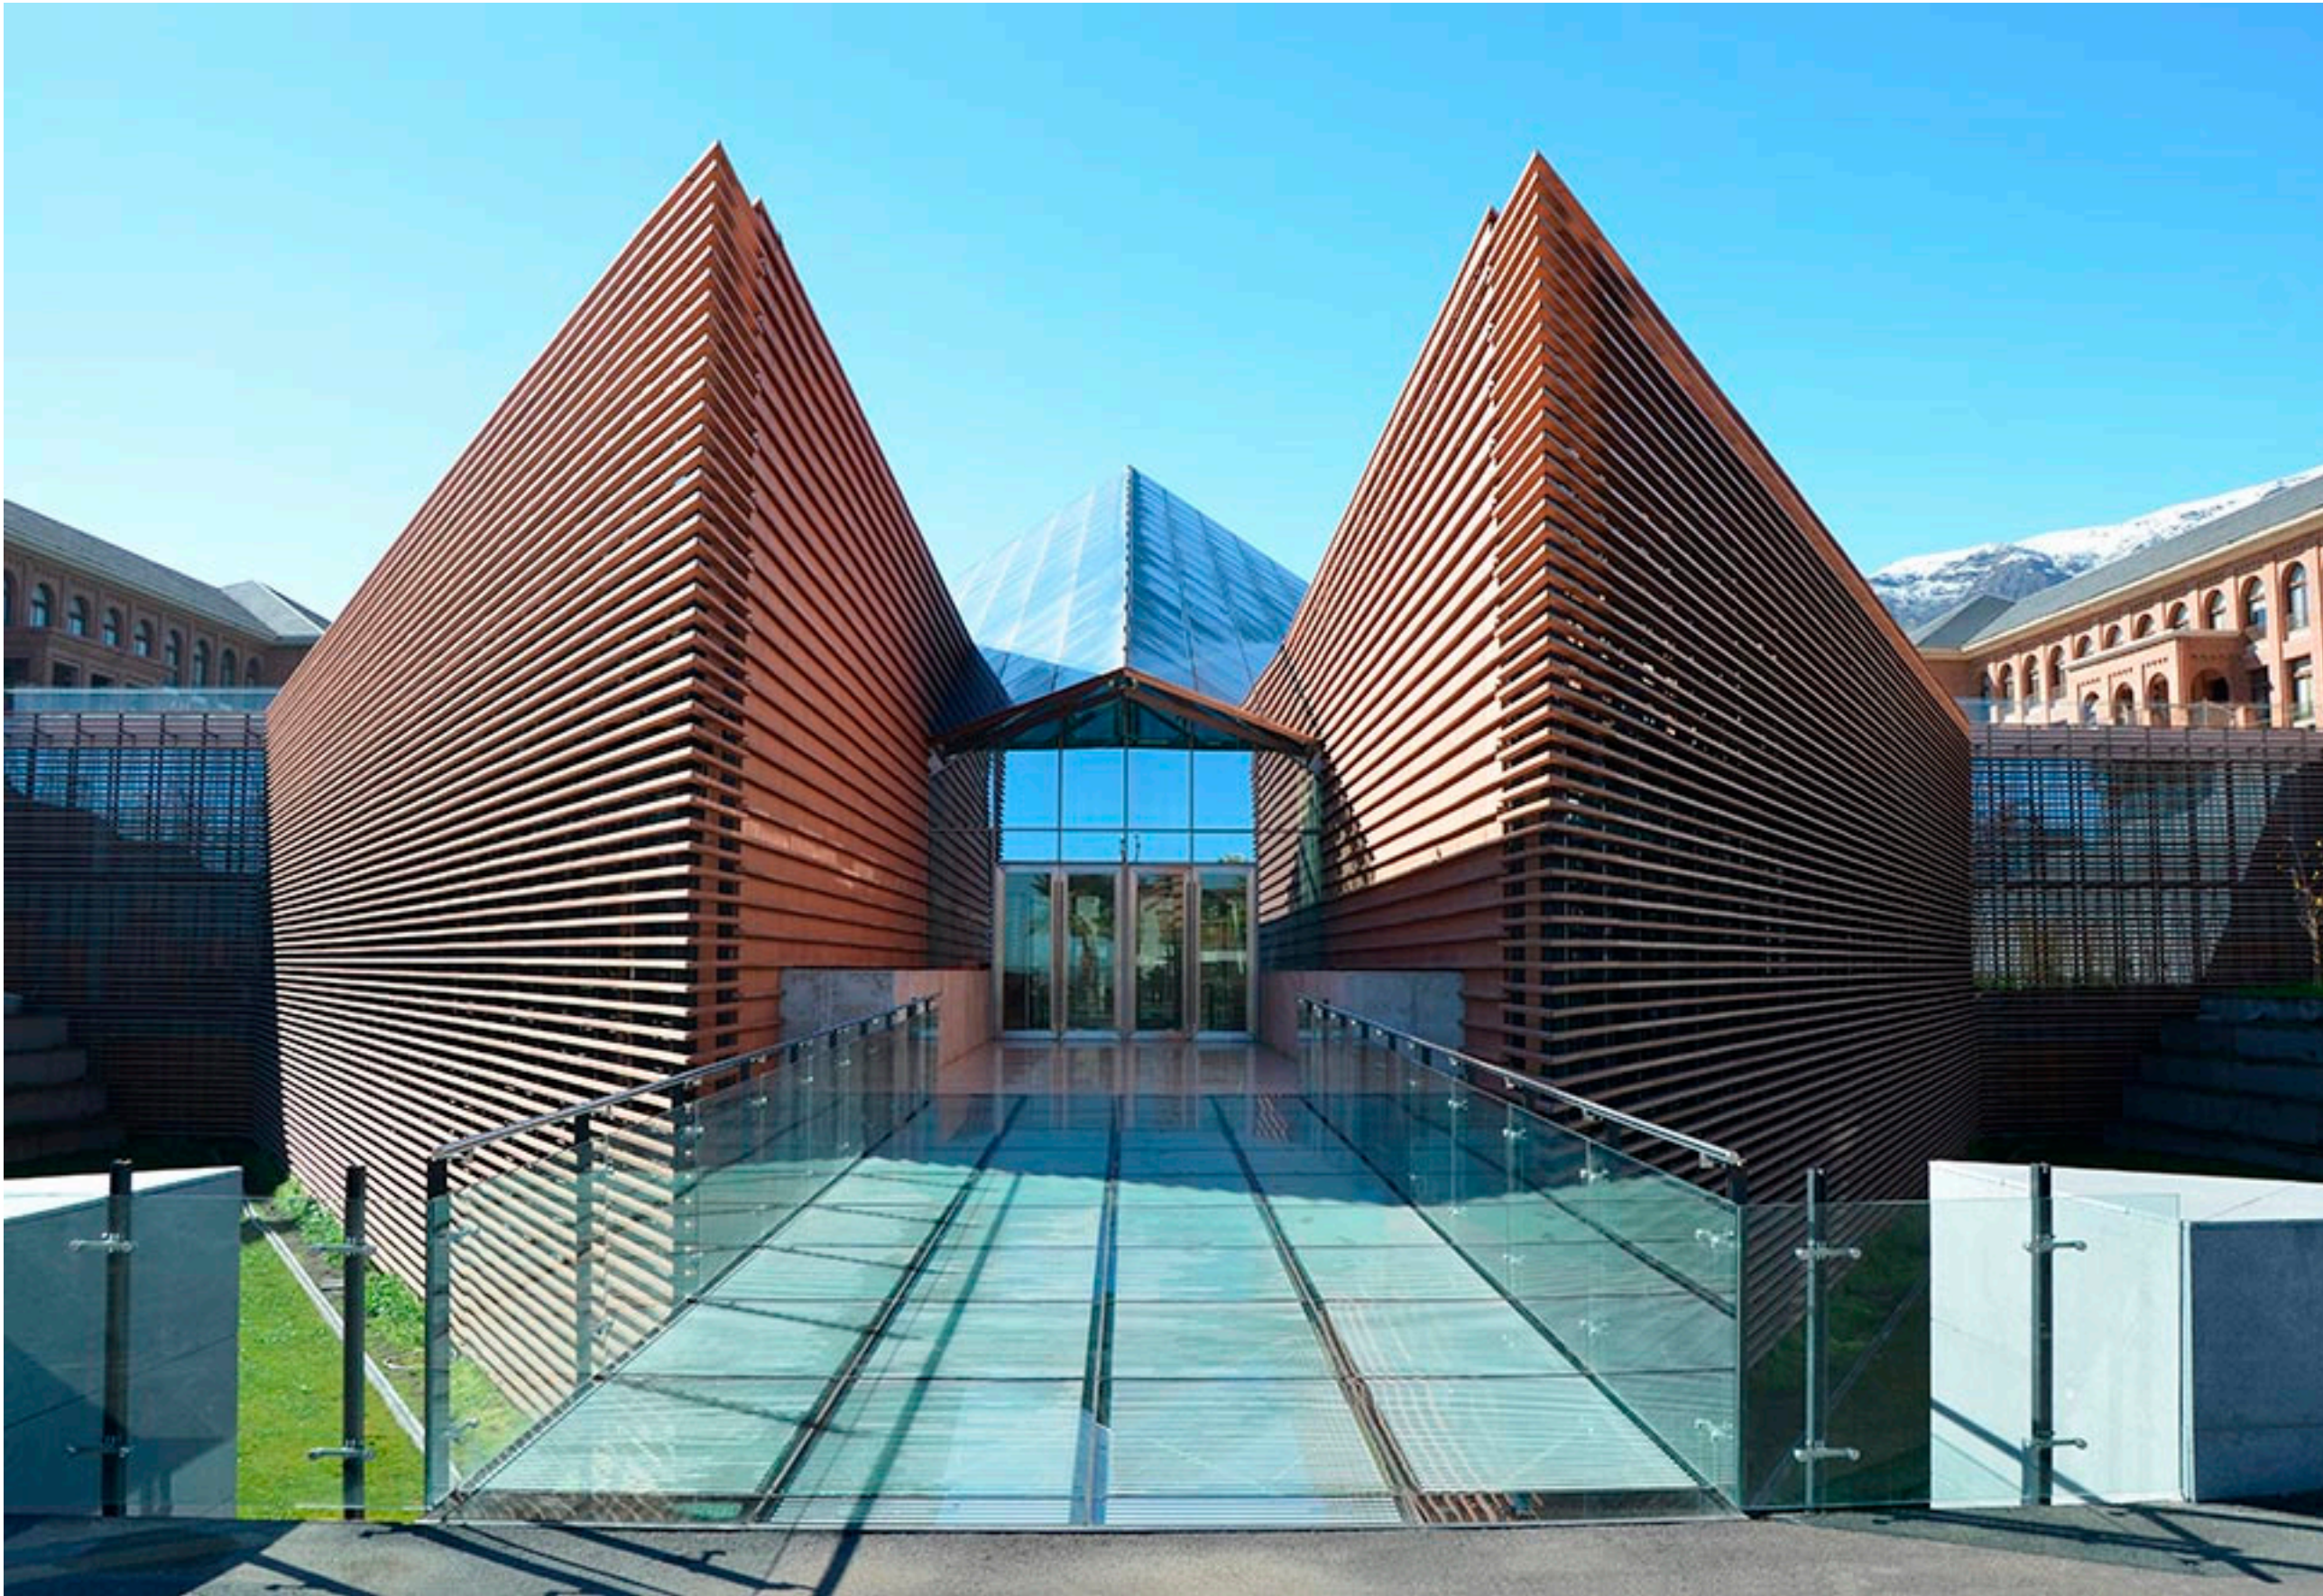

CONTENTS

FAVETON	6
FAVETON PERFORMANCE	8
FAVETON MATERIALS	10
FAVETON WORKING PROCESS	12
FAVETON PROJECTS	14
TILES	58
Ceram	62
Ceram Sorol	64
Acqua	66
Elar Roof Tile	68
Louvers	70
Brick Tile	74
Façade Solutions	76
Faveton Design	80
COLOURS	82
Standard	84
Glazed	86
Innova	88
TECHNOLOGY	98
Façade	100
Elar Roof Tile	108
Façade Solutions	110
Louvers	114
Bricktile	120
IN SHORT	126
FAVETON SUSTAINABILITY	130

Contact




Cra. Herrera de los navarros, Km 1,5
50450 Muel - Zaragoza (España)

Phone. (+34) 976 140 311
Fax. (+34) 976 141 164
E-mail info@faveton.com

www.faveton.com

(PROJECT) Los Andes University. Chile



FAVETON TERRACOTA is a company focused on the production of ceramic adaptable products that can provide a higher level of comfort and habitability. More than 50 years of experience in the ceramic extrusion world together with the interest in manufacturing products for the everyday comfort situates us on a high position in the ventilated façade market. Our innovative industrial production plant located in Muel, Spain is fully equipped with the best technologies that allow an optimal solution to big size projects.

FAVETON products are extruded ceramic tiles, characterized by a wide range of formats, colours and finishes that provide the building with a modern and innovative appearance and at the same time preserve the traditional appearance of ceramic products. The use of this material contributes to the improvement of the façade's technical characteristics. This kind of porcelain-ceramic material increases its mechanical resistance making FAVETON one of the most suitable materials for ventilated façades.

Faveton constantly pursues the opening of new international markets.

Conceived within the world of the extruded ventilated façades, FAVETON designs and produces its ceramic products for both new constructions and rehabilitations, offering quality, aesthetics, guarantee of efficiency and optimal site works.

Also FAVETON expands in the countries with which it usually works, always accompanied by the use of high technology, innovation and its own engineering for every project.



Mémorial - Médiathèque De Montauban
France



Ahuja Medical Center
United States



Houari Boumedienne International Airport
Algiers



Clemenceau Medical Center
Saudi Arabia



Hyundai Seoul
South Korea



Canterbury Christchurch University
New Zealand



VENTILATED FAÇADE PERFORMANCE

PASSIVHAUS

- Energetic costs reduction
- Thermal and acoustic comfort
- Thermal isolation
- Humidity: condensing and rain
- Waterproof building
- Passive ventilation
- Double wall

BUILDING CONSTRUCTION

- Direct application
- No generation of debris
- Piece by piece replaceable system
- Hidden conductions
- Hidden cracks and crevices

SPECIFICATIONS OF THE TILES

- High mechanical resistance
- Non-combustible
- Frost resistant
- Time resistant
- Self-cleaning with rainwater
- Water pressure cleaning
- No maintenance costs
- 100% recyclable material
- Slab heights
- Highly Customization
- Ability to be easily customised
- Desings made-to-measure

TECHNICAL ASSISTANCE



CUSTOMIZED DESIGNED SUBSTRUCTURE
Wide range of fitting systems



CONSTRUCTIVE SOLUTIONS FOR FAÇADES
Flexible manufacturing system



MONOBLOCK TILES



FLEXION RESISTANCE | ISO 10545-4
FVC 24 N/mm²



IMPACT STRENGTH | ISO 10545-5 ✓



WIDE RANGE OF FORMATS AND SHAPES



COLOUR STUDIO
Glazed, natural, inkjet
And made-to-measure colours



WATER ABSORPTION | ISO 10545-5
<1% or 3-6% depending on clay type



FREEZING RESISTANCE | ISO 10545-12 ✓
Unalterable according to test (100 cycles + 5°C to -5°C)



THERMAL SHOCK RESISTANCE | ISO 10545-9 ✓
Testing at 145° unalterable



DIMENSIONAL TOLERANCE | ISO 10545-2 ✓
Length. Height. Thickness. Surface flatness,
Orthogonality of height.




ALL INFORMATION AVAILABLE
www.faveton.com



TERRACOTA



PORCELANIC

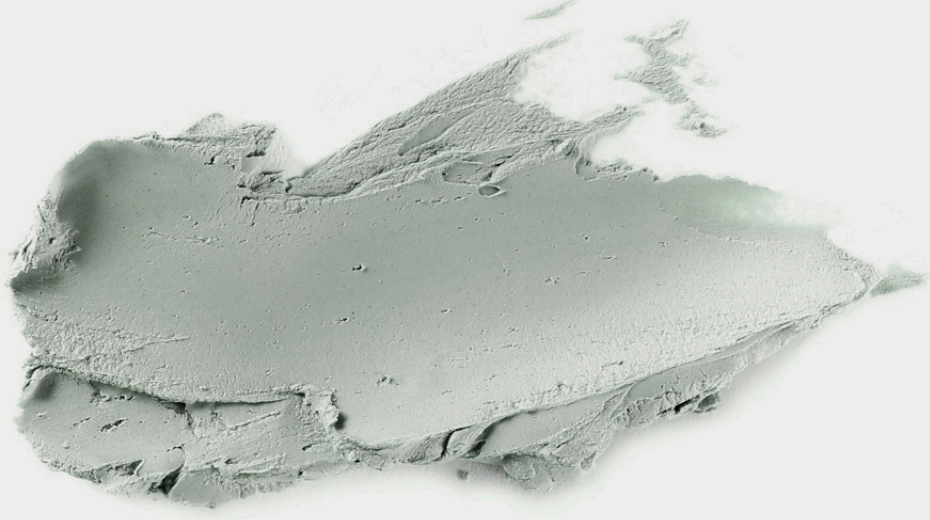

PROPERTIES	RULE	FAVETON VALUES	
Tolerances	ISO 10545-2	Lenght (Extrusion Direction)	+/- 1 mm*
		Height	+/- 2 mm*
		Thickness	+/- 10% *
		Extrusion Direction	+/- 0,3% of length
		Rectangulativity	+/- 1% of length
		Surface flatness of diagonal or height	+/- 0,5%
Water absortion	ISO 10545-3	<1% or 3-6% depending on color	
Bending strength	ISO 10545-4	FVC 15-20 N/mm ² - FVB 14-18 N/mm ² depending on colour	
Linear thermal expansión	ISO 10545-8	Coefficient of expansion 5,7 x 10-6 (K-1). Test ITC.	
Resistance to thermal shock	ISO 10545-9	Unalterable up to 145°C, according to test	
Moisture expansion	ISO 10545-10	Mean value <0,1 mm/m, maximum value <0,1 mm/m. Test ITC	
Frost resistance	ISO 10545-12	Unalterable according to test (100 cycles + 5°C a -5°C)	
Chemical resistance	ISO 10545-13	Only applicable in corrosive conditions. At least G and B class	
Stain resistance	ISO 10545-14	At least CLASS 3	
Color diferences	ISO 10545-16	ΔE <2	

PROPERTIES	RULE	FAVETON VALUES	
Tolerances	ISO 10545-2	Lenght (Extrusion Direction)	+/- 1 mm*
		Height	+/- 2 mm*
		Thickness	+/- 10% *
		Extrusion Direction	+/- 0,3% of length
		Rectangulativity	+/- 1% of length
		Surface flatness of diagonal or height	+/- 0,5%
Density		2.300 kg/m ²	
Water absortion	ISO 10545-3	<0.5% depending on color	
Bending strength	ISO 10545-4	Min. 6.3KN	
Linear thermal expansión	ISO 10545-8	Coefficient of expansion 5,4 x 10-6	
Resistance to thermal shock	ISO 10545-9	Pass	
Moisture expansion	ISO 10545-10	Mean value <0,1 mm/m, maximum value <0,1 mm/m. Test ITC	
Frost resistance	ISO 10545-12	Pass	
Stain resistance	ISO 10545-14	CLASS 5	
Color diferences	ISO 10545-16	ΔE <2	



FAVETON® PROJECTS

WORKING PROCESS

1 ARCHITECT/ DEVELOPER

BASIC EVALUATION

- Evaluation of the representative area.
- Initial estimation/budget.

2 EVALUATION OF THE PROJECT

PRELIMINARY DESIGN

- Evaluation of drawings
- Encounter solutions.
- Technical specifications
- Structure design
- Estimation

3 APPROVAL OF THE PROJECT

Field engineering.

- Façade reassessment
- Reassessment of the preliminary design
- Possible deviations
- Deviation solutions and final examination

Execution project.

- Execution project, installation plans
- Approval of agreement, purchase order

4 CARRYING OUT OF THE PROJECT



PROJECT

SeMoCA, SEOUL MUSEUM OF CRAFT ART


INFORMATION

Type: Institutional
Location: Seoul, South Korea

FACADE PARTS

 JAVA 200x130 | 250X100 | 350X80

COLOURS

 NT-BS05  NT-M50  NT-R004



Type: Residential
Location: Zaragoza, Spain


Architects: Rafael Moneo



COPING




LUZAR



AZ07



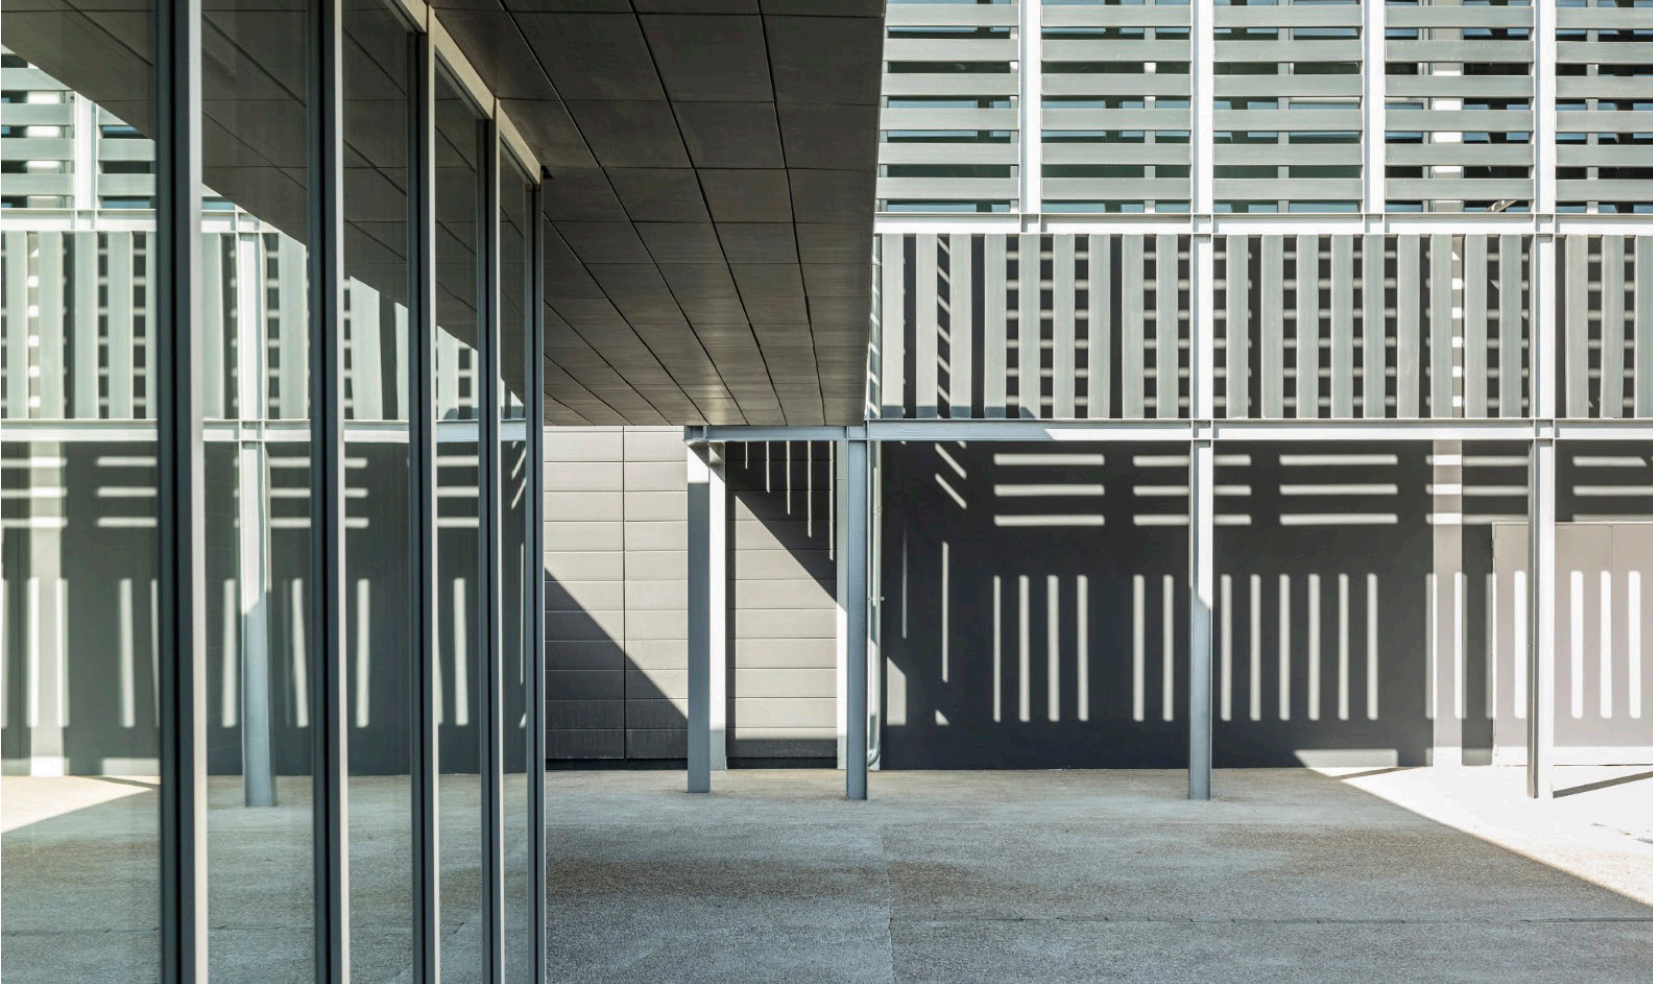

THE Ó BUILDING

Type: Residential
Location: Barcelona, Spain

Architects: Rafael Moneo

 JAVA 60x80

 NT-M5005



MERCAT DEL FONDO

Type: Educational
Location: Santa Coloma de Gramenet, Spain

Architects: Pich-Aguilera Arquitectes

CERAM20

NA03

R011

R021



THE IMPERIAL MANSION
BEIJING MARRIOTT EXECUTIVE APARTMENTS

Type: Hotel
Location: Beijing, China

CERAM28




PILASTER


R0011







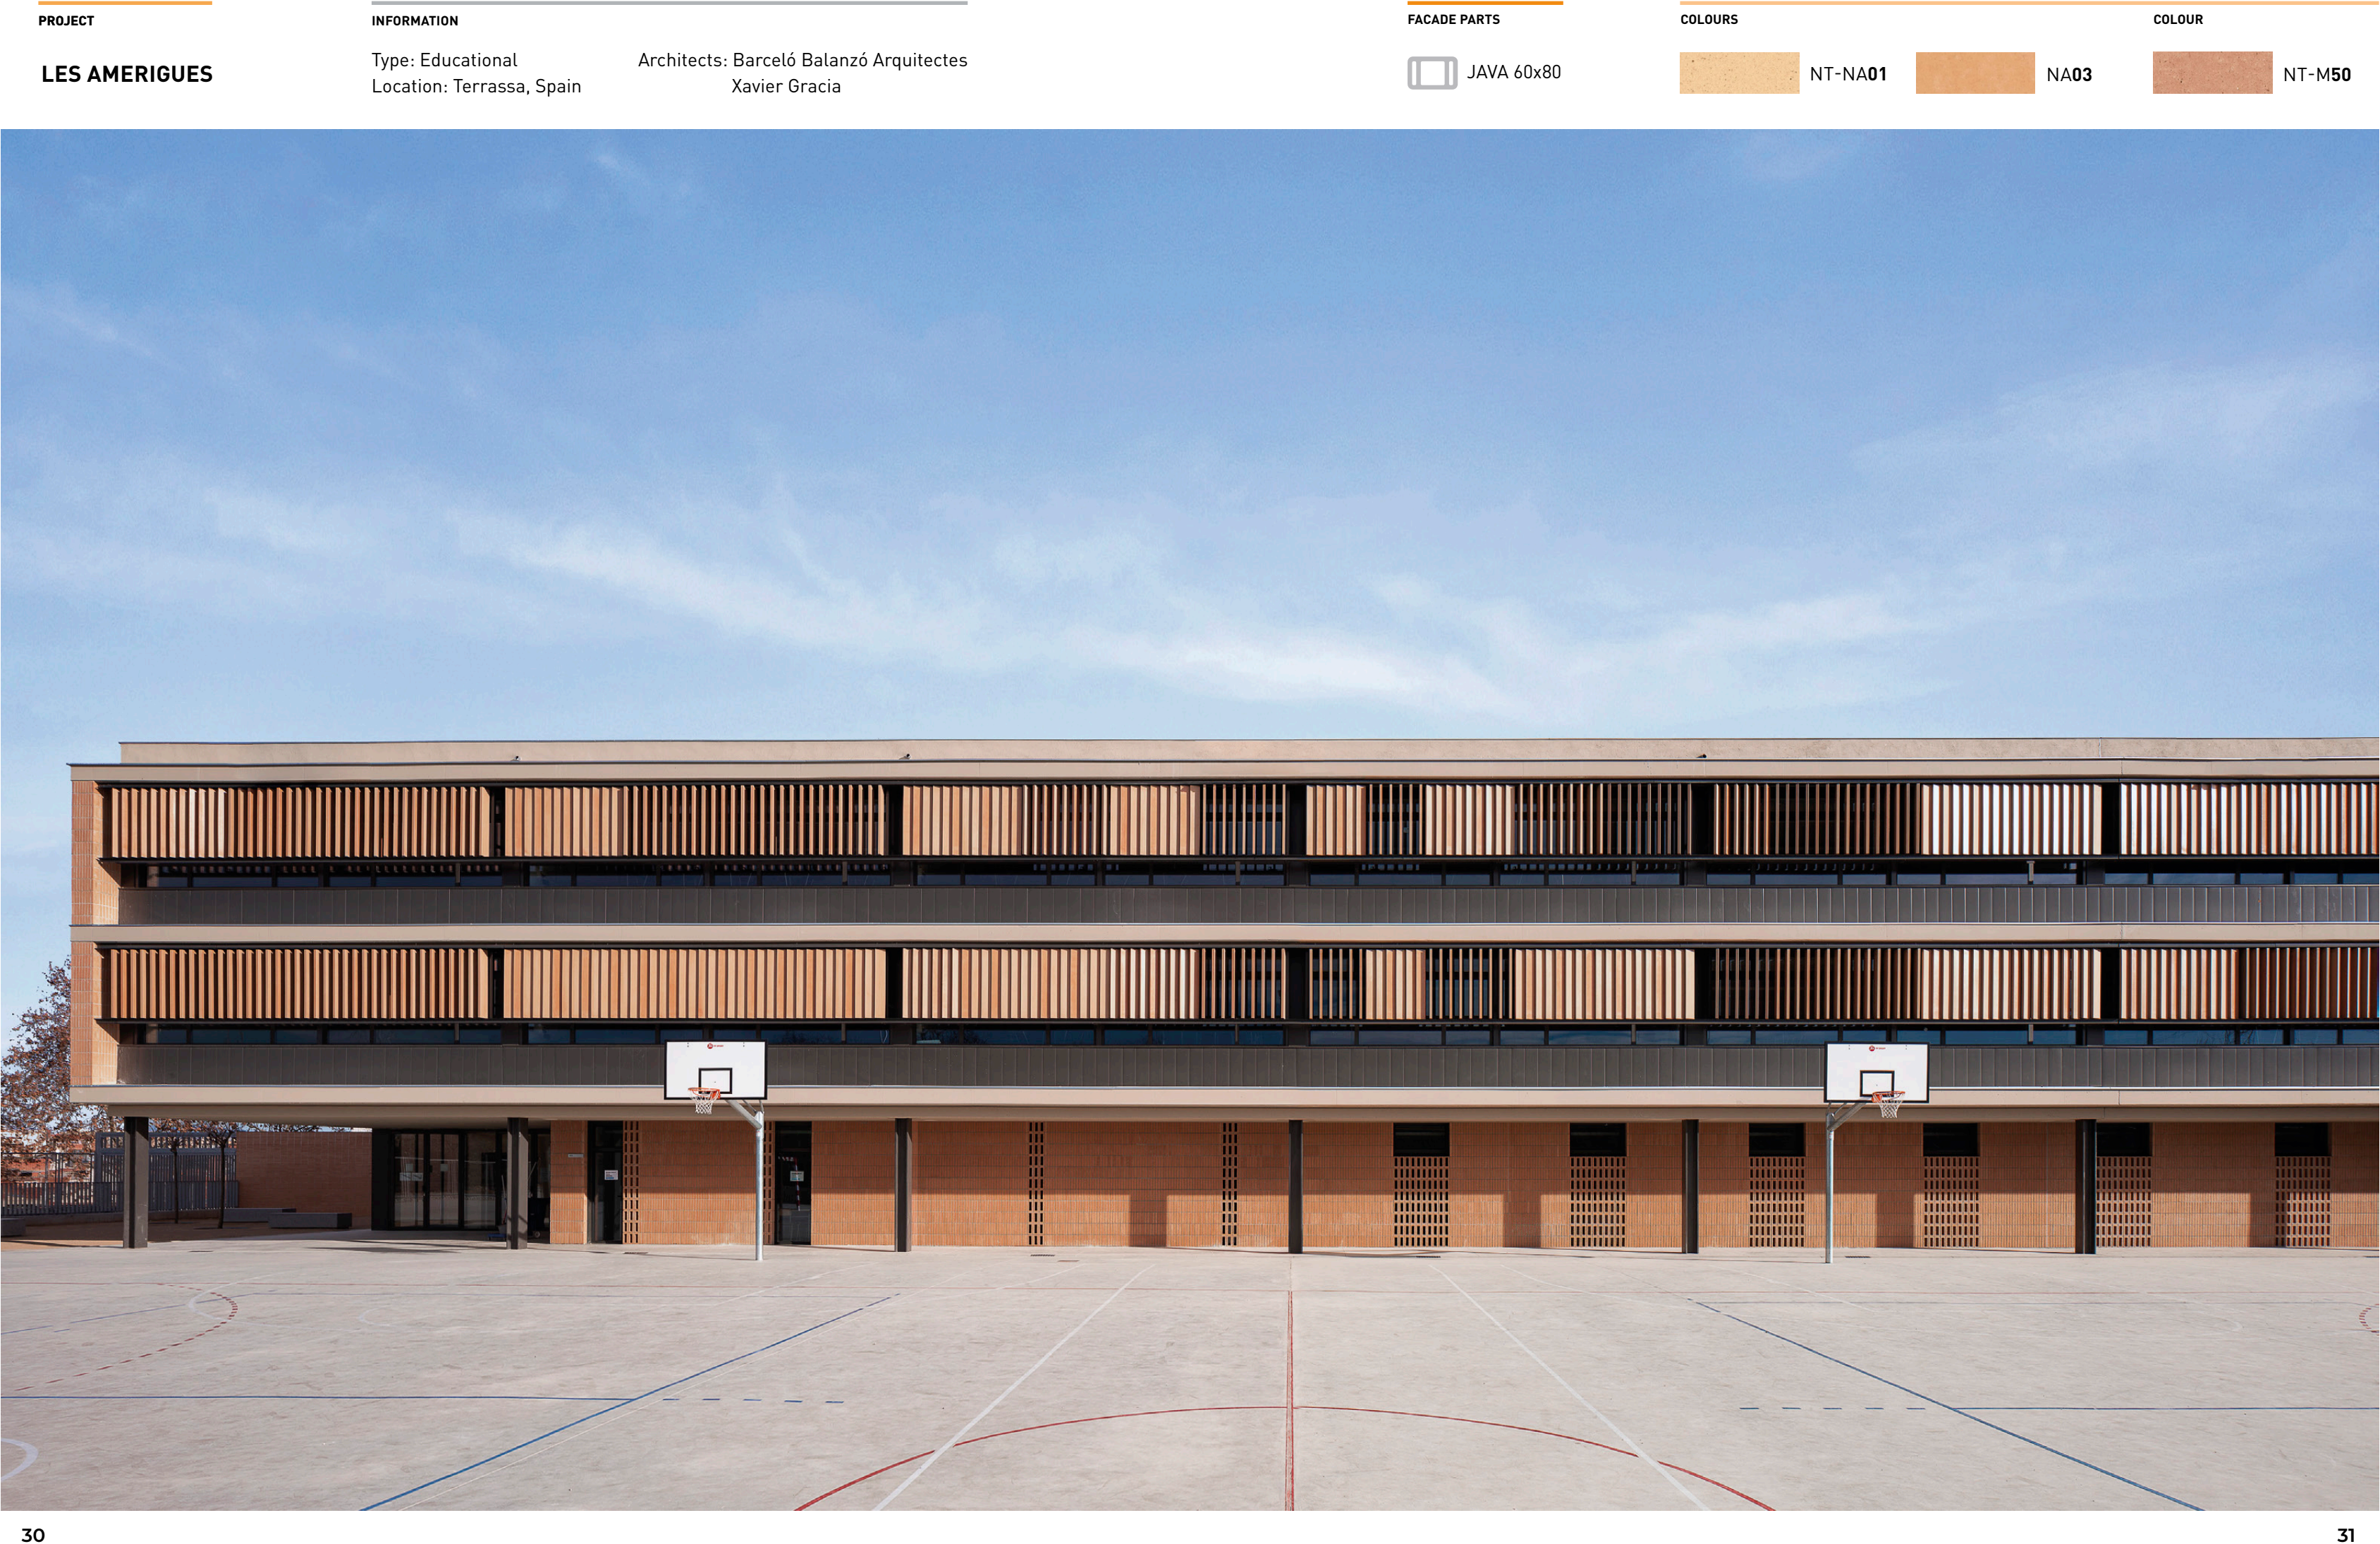





PALACIO DE CONGRESOS DE HUESCA

Type: Institutional
Location: Huesca, Spain
Architect: Rafael Beneytez
Pedro Lafuente

CERAM28
COPING

ME02







UNIVERSITY OF ARKANSAS GARLAND BOOKSTORE

Type: University
Location: Arkansas, EEUU

Architect: Amirmoez Foster
Hailey Johnson

FACADE PARTS



JAVA 60x120



BRIOL 60x60



CERAM28

COLOUR



NT-R021



NE04



R004





Type: Residential
Location: Kuwait, KW
Architects: AGi architects
Photo Credits: Mr. Mohammad Taqi Ashkanani

ACQUA WAVY ACQUA




TU02



TU02-B



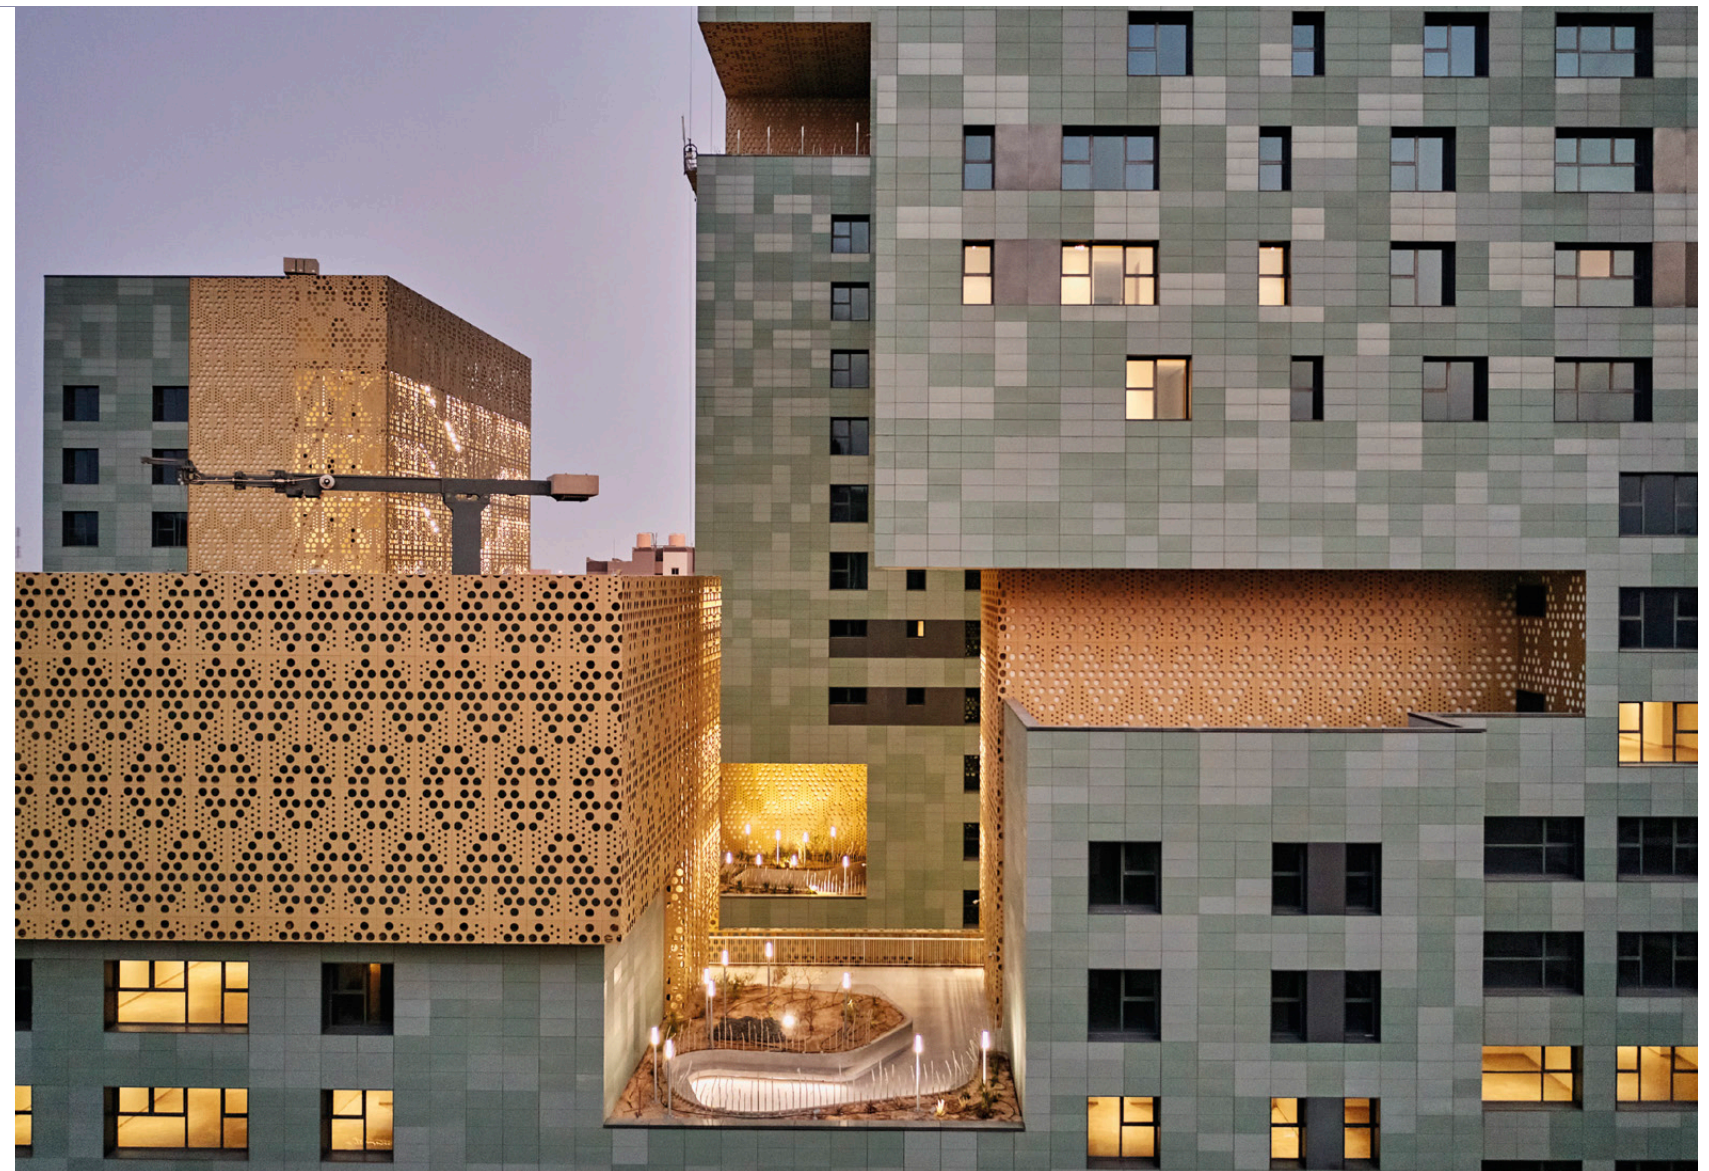



PROJECT

VISION 1793 APARTMENTS SPEARS

INFORMATION

Type: Residential
Location: Beirut, Lebanon
Architects: Charles Hadife Architects

FACADE PARTS

CERAM28

COLOUR



R021

COLOUR



GR07





TAMDEEN SQUARE RESIDENTIAL TOWERS

Type: Residential
Location: Kuwait
Architects: AGi architects
Photo Credits: Mr. Mohammad Taqi Ashkanani

ACQUA COPING

BS05-B



ONE MATERIAL FOR EVERY PURPOSE

FAVETON®



VENTILATED FAÇADE

WALL CLADDING

LOUVERS

SOLUTIONS

Create with us!

CERAM 20

Standard heights:
200-250-300-400-500mm


Maximum length: 1500mm

Weight: 32 kgs / m2

Thickness: 20mm

Standard joints:
10mm horizontal and vertical

Anchorage:
horizontal and vertical

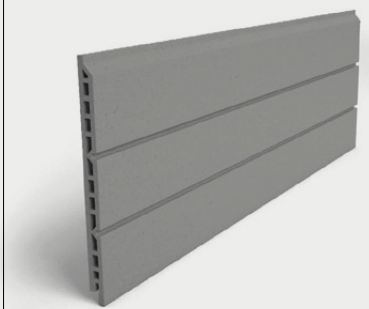

CERAM 28

Standard heights:
200-250-300-350-400-450
500-600mm


Maximum length: 1500mm

Weight: 45 Kg / m2

Thickness: 28mm

Standard joints:
8mm horizontal and vertical

Anchorage:
horizontal and vertical



ACQUA

Standard heights:
200-300-400-500-600mm


Maximum length: 1500mm

Weight: 32 kgs/m2

Thickness: 20mm

Standard joints:
4mm horizontal and vertical

Anchorage:
horizontal and vertical



ELAR


Customized designed substructure

Height: up to 400mm

Maximum length: 1200mm

Weight: 30 kgs/m2

Thickness: 16mm



BRICK TILE


Length: up to 300 mm.
(between axes)

Variable joints according to system

BT10 - 150x10
Anchorage: multiple solutions
Glued

BT14 - 74x14
Ventilated system
Sandwich panel
Anchorage: horizontal

BT21 - 90x21
Ventilated system
Sandwich panel
Anchorage: horizontal




LOUVERS

Maximum length: 1500 mm

Anchorage:
horizontal and vertical

Customized design substructure

Pivoting system



SOLUTIONS

Maximum length: 1500 mm

Anchorage:
horizontal and vertical

Customized design substructure

Monoblock pieces

Cut corners and curves




DESIGNS

Standard heights:
200-250-300-350-400-450
500-600mm


Maximum length: 1500mm

Body coloured
Glazed finishes
Raw surfaces
Innova colours



CERAM

TECHNICAL INFORMATION

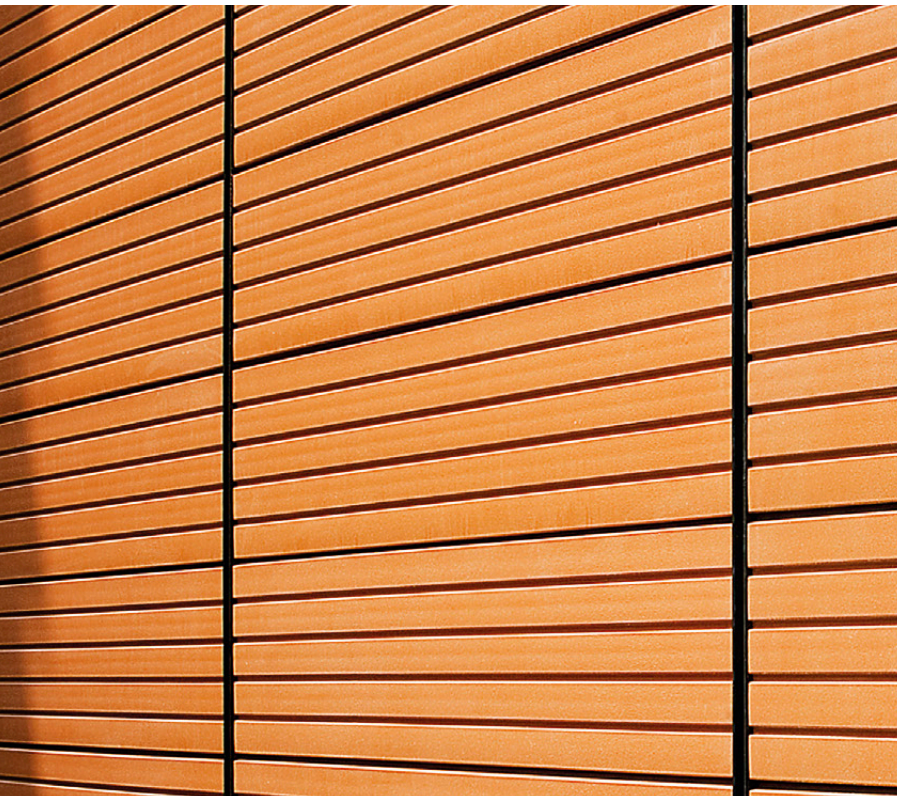

Extruded tile available in two thicknesses (20 and 28 mm) with an overlapping joint design, preventing the direct entry of water into the chamber and improving the technical performance of the building.



STRONG VISUALS WITH HIGH PERFORMANCES

(PROJECT) Seoul National University, South Korea



CERAM 20

CERAM 28

ANCHORAGE

Horizontal
Multiple anchoring systems
Solutions made-to-measure

DIMENSIONS

CERAM 20 height: 200-250-300-400-500mm
CERAM 28 height: 200-250-300-350-400-450-500-600mm
Maximum length: 1500mm

FINISHES

Body coloured
Glazed finishes
Raw surfaces for plain tiles
Innova colours for plain tiles

PRODUCT DESCRIPTION

Weight: CERAM 20 - 32 kgs/m² | CERAM 28 - 45 Kg / m²
Thickness: CERAM 20 - 20mm | CERAM 28 - 28mm
Standard joints: 10mm horizontal and vertical
Available in different geometries, finishes and colours

(*) Dimensions in millimetres

CERAM SOROL

DIMENSIONS

CERAM 20 height: 200-250-300-400-500mm
 CERAM 28 height: 200-250-300-350-400-450-500-600mm
 Maximum length: 1500mm



FVC20 - S1R
FVC28 - S1R



FVC20 - S2R
FVC28 - S2R



FVC20 - S3R
FVC28 - S3R



FVC20 - S4R
FVC28 - S4R



FVC20 - S5R
FVC28 - S5R



FVC20 - S6R
FVC28 - S6R




FVC20 - S7R
FVC28 - S7R



FVC20 - S9R
FVC28 - S9R




FVC20 - Russet

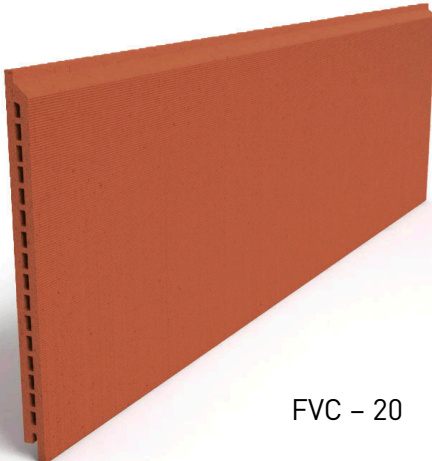

FVC - 20



FVC20 - 15R

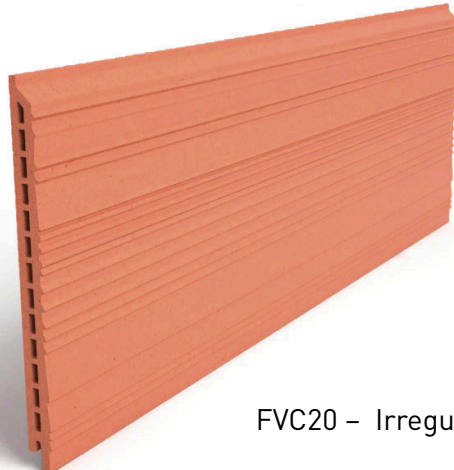

FVC20 - Irregular

ACQUA


Extruded tile with symmetrical joint design that allows flexibility in installation. Together with the possibility of wavy and flat exterior finishes, it generates volume along with contrast of lights and shadows that energize the FAÇADE and, therefore, breaks the static character of a conventional flat front.

TECHNICAL INFORMATION



(PROJECT) Seminario Live. Zaragoza, Spain. Architects: Ingennus Urban Consulting

TOP QUALITY ADAPTED TO ALL TYPES OF PROJECTS

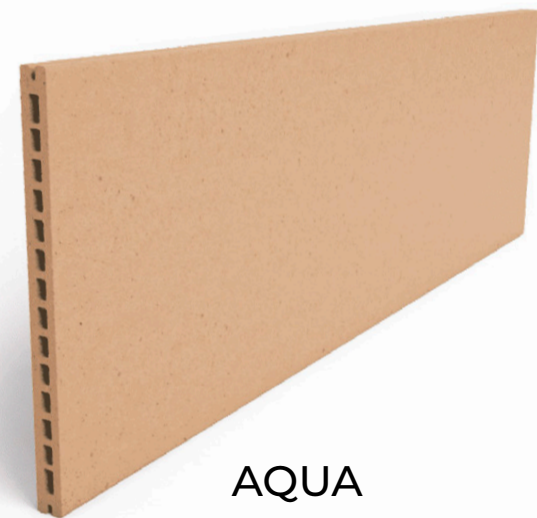

AQUA



WAVY AQUA

ANCHORAGE

Horizontal and vertical
Multiple anchoring systems
Solutions made-to-measure

DIMENSIONS

AQUA height: 200-300-400-500-600mm
WAVY AQUA height: 200-300-400-500mm
Maximum length: 1500mm

FINISHES

Body coloured
Glazed finishes
Raw surfaces
Innova colours


PRODUCT DESCRIPTION

Weight: 32 kgs/m²
Thickness: 20mm
Standard joints: 8mm horizontal and vertical
Available in different geometries, finishes and colors


(*) Dimensions in millimetres

ELAR


TECHNICAL INFORMATION

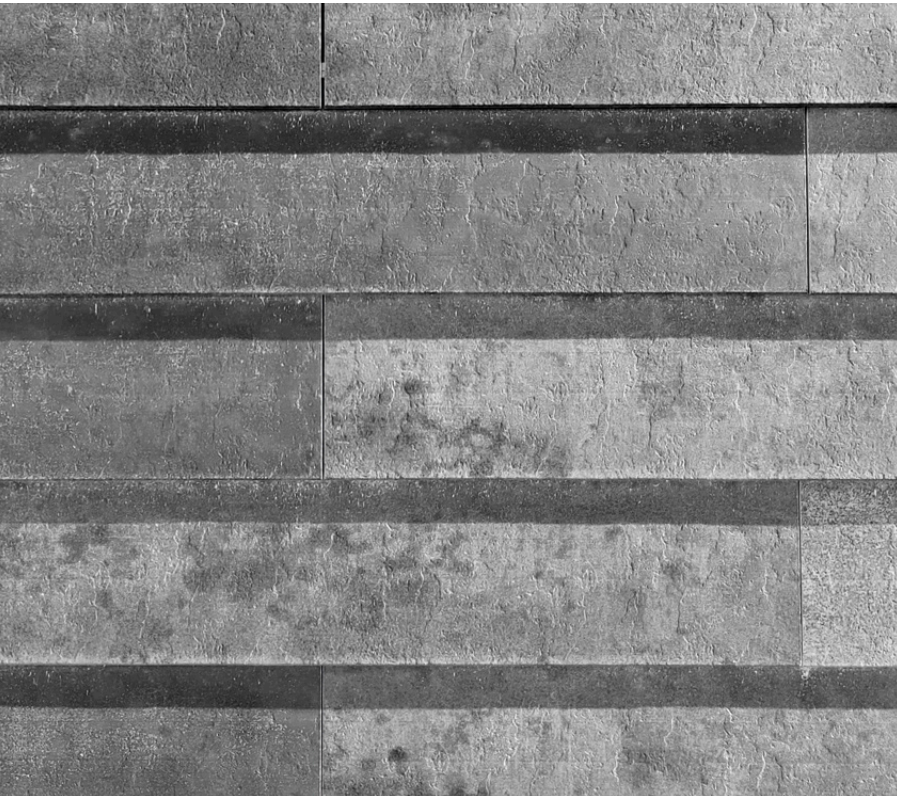

Elar extruded ceramic tile, flexible in its installation and with a great possibility of finishes and colors. It is presented as a product, both for a smooth and a roof tile texture, creating a rhythm of lights and shades, which energize the final aspect of the project.

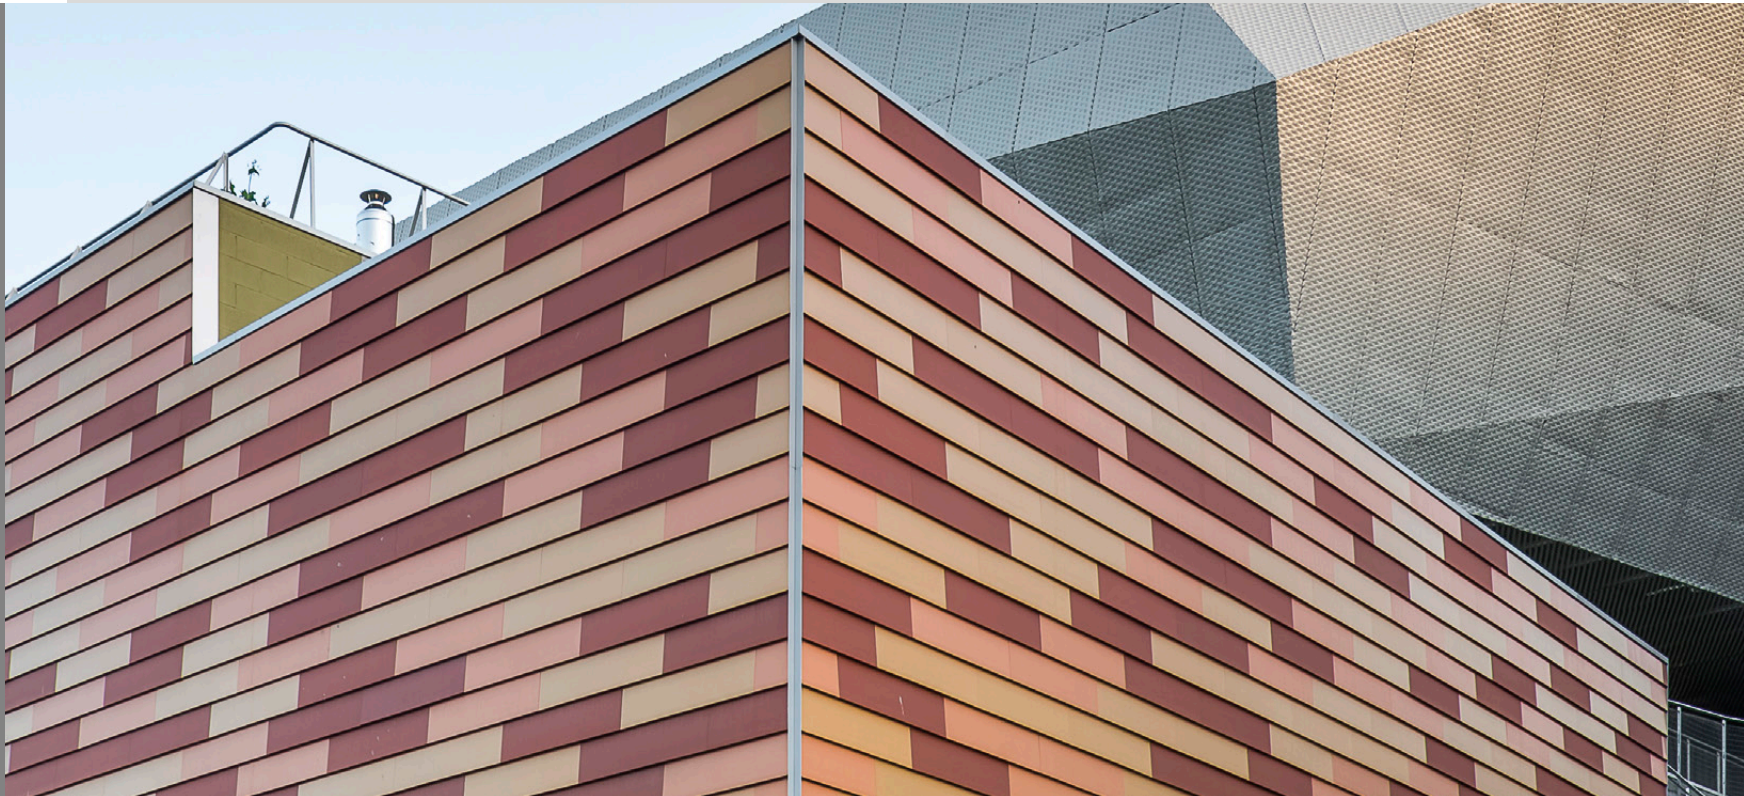

NATURAL BEAUTY WITH POWERFUL CHARACTER

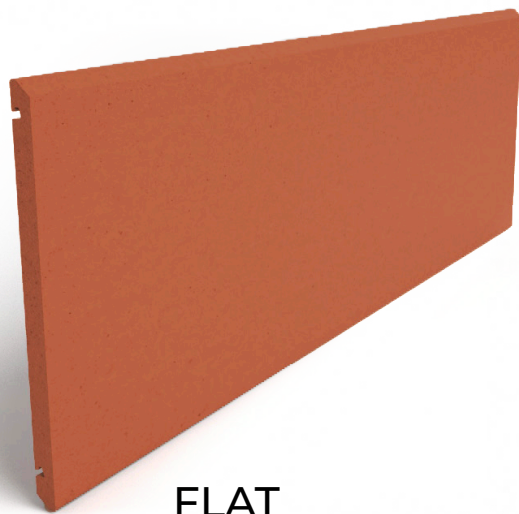

FLAT



ROOF TILE

(PROJECT) Mercat del Fondo. Spain

ANCHORAGE

Horizontal
Multiple anchoring systems
Solutions made-to-measure

FINISHES

Body coloured
Glazed finishes
Raw surfaces
Innova colours

DIMENSIONS


Height: up to 300mm
Maximum length: 1200mm

PRODUCT DESCRIPTION

Weight: 30 kgs/m²
Thickness: 16mm
Standard joints: 8mm horizontal
Available in different geometries, finishes and colors

(*) Dimensions in millimetres


LOUVERS

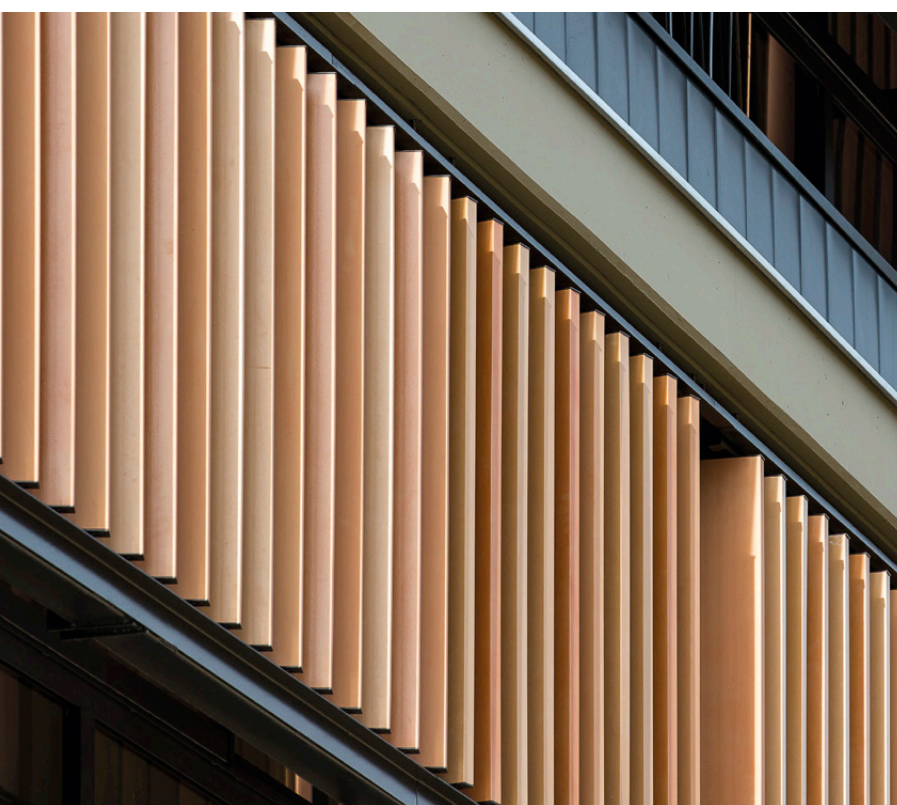

Louvers allow to maintain the aesthetic continuity of ceramic tiles in glazed areas, reducing insolation and allowing the increase of visual privacy for the said areas. Also, they allow a more intelligent use of light and therefore favors sustainability and energy saving criteria.



SOLAR SHADING DESIGN FOR CONTEMPORARY BUILDINGS

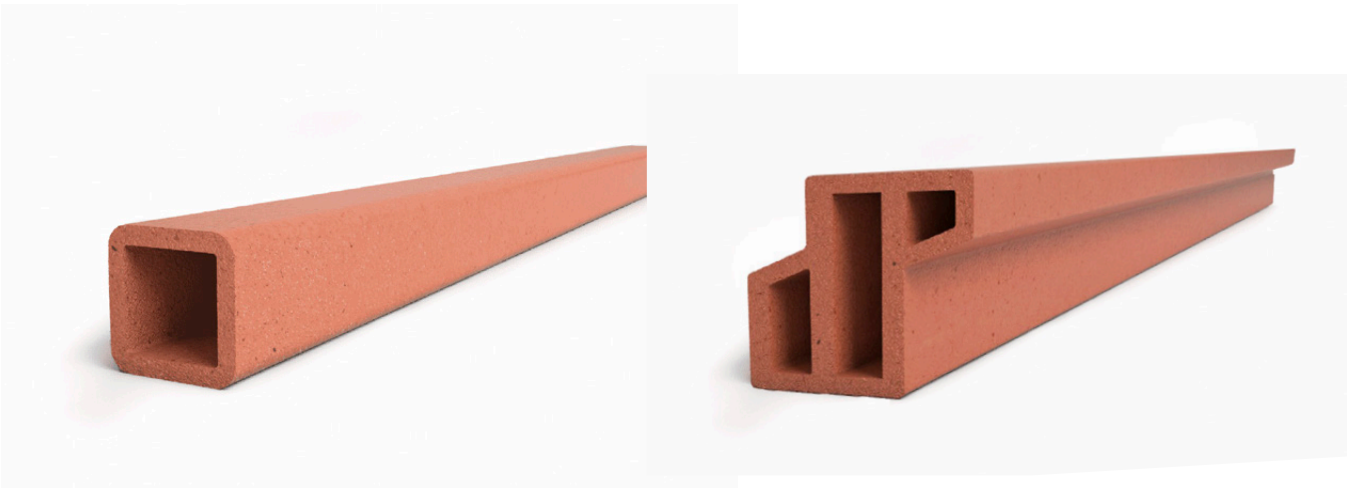

(PROJECT) Bodega Institucional. Spain

ANCHORAGE

Horizontal and vetical
Multiple anchoring systems
Solutions made-to-measure

FINISHES

Body coloured
Glazed finishes
Raw surfaces

DIMENSIONS

Height: since 50mm to 440mm
Maximum length: 1500mm



PRODUCT DESCRIPTION

Weight: Briol, Wavy Briol, Bora: 5.5 kgs/m²
Spheric: 5.0 kgs/m²
Java: 10.0 kgs/m²
Orona: 14.0 kgs/m²
Thickness: 8mm
Available in different geometries, finishes and colors


(*) Dimensions in millimetres

LOUVERS

DIMENSIONS Maximum length: 1500mm

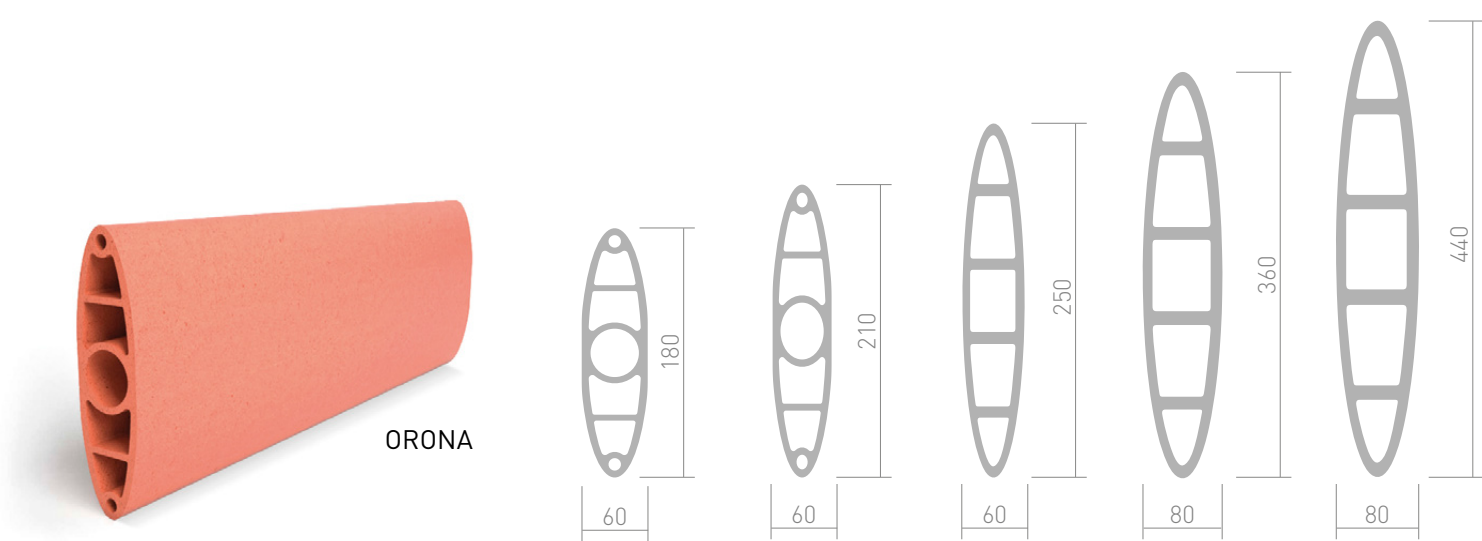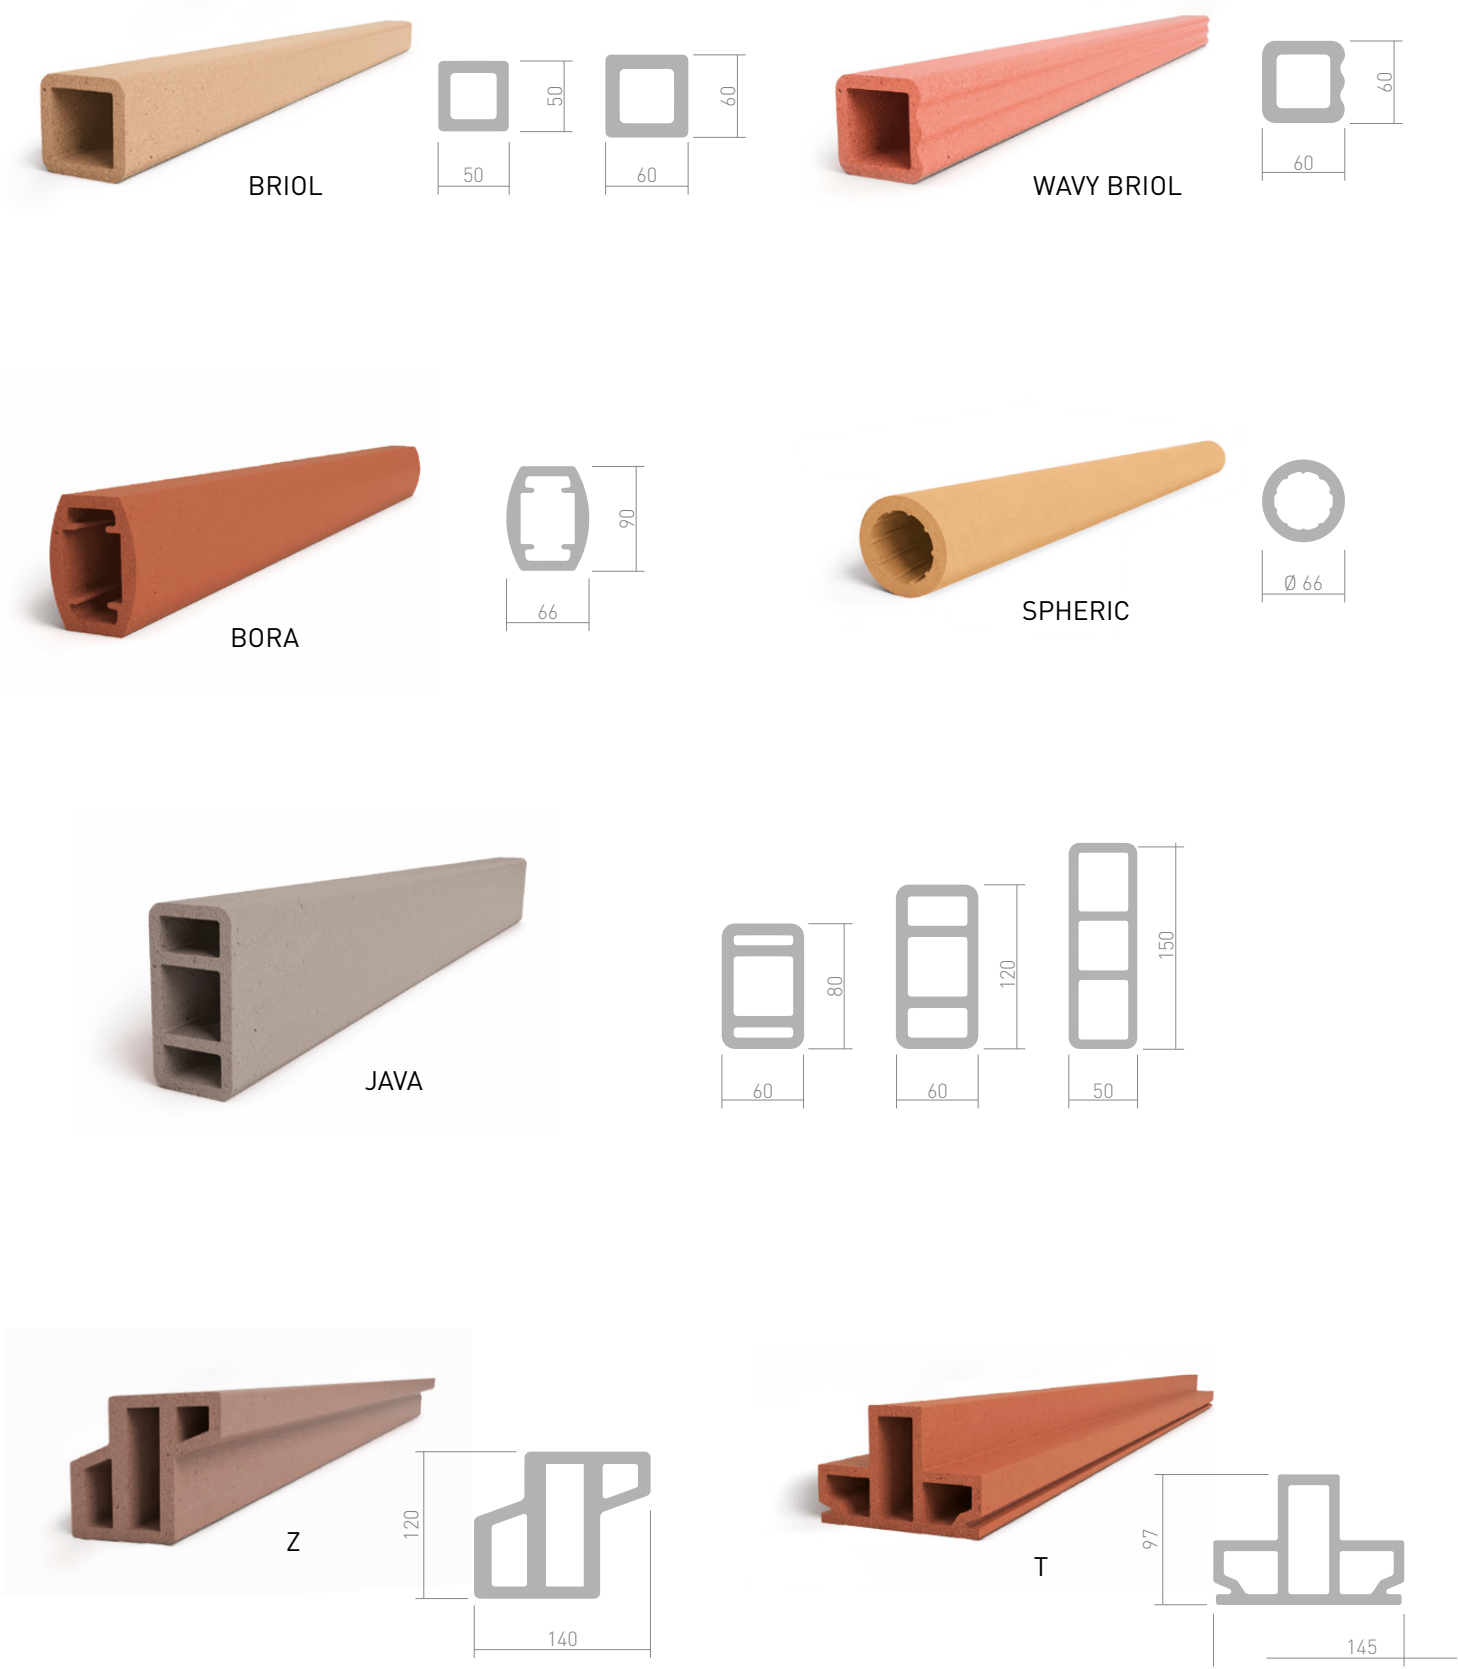

MODULAR SYSTEM Made-to-Measure

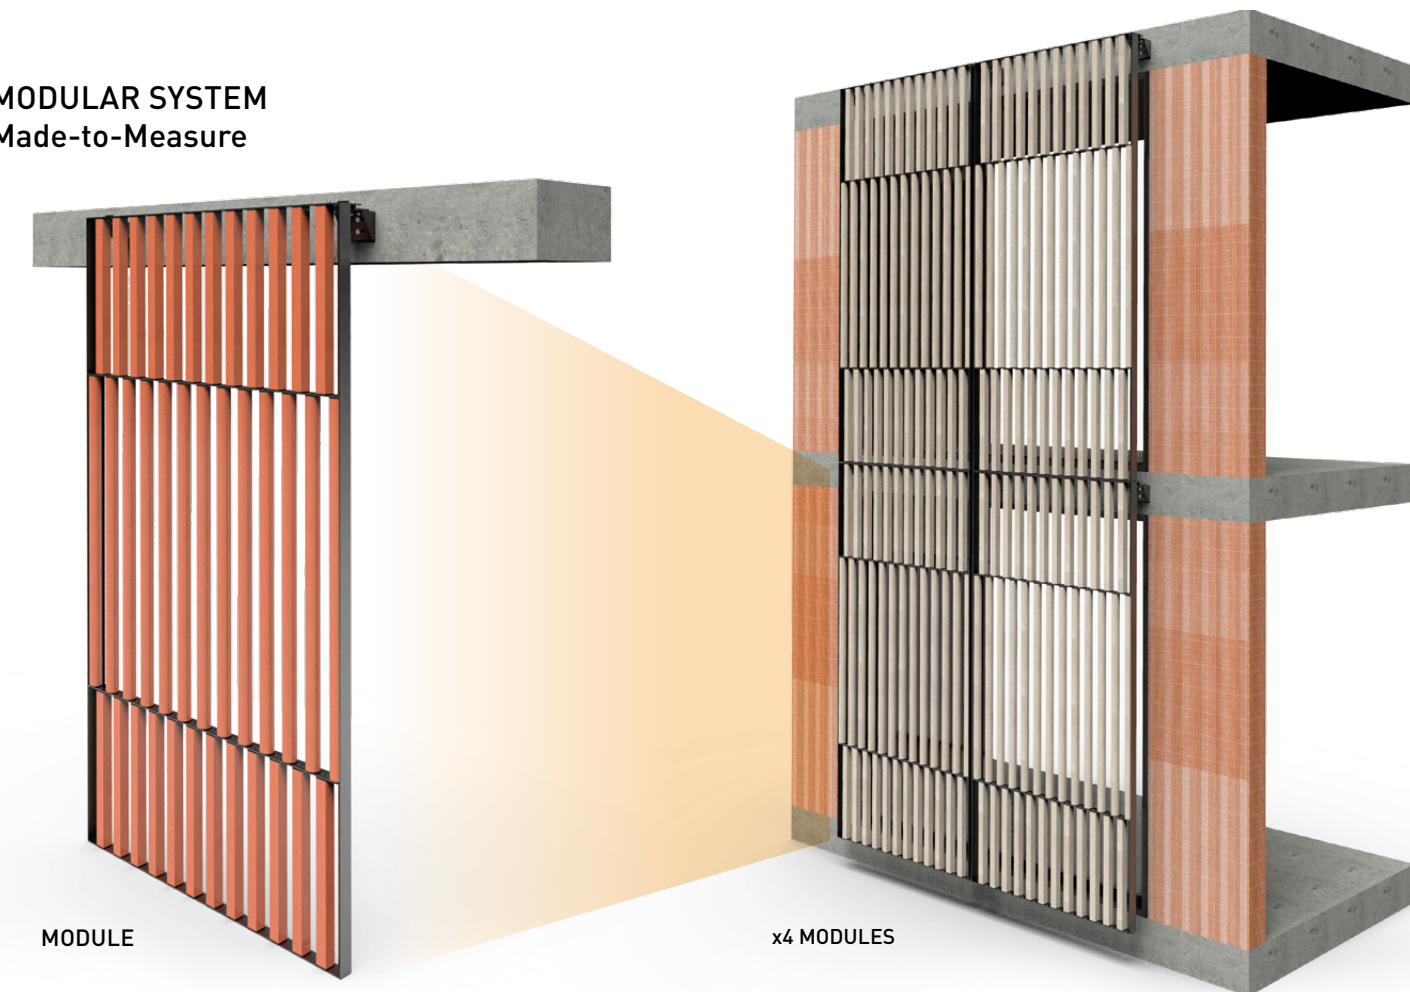


(*) Dimensions in millimetres

BRICK TILE




Without forgetting our roots and knowing our origin, our land historically influenced by Mudejar architecture and great ceramic tradition we could not forget the culture and aesthetics of brick FAÇADEs. Brick tile offers a new system of ventilated FAÇADEs with brick external design.

TECHNICAL INFORMATION

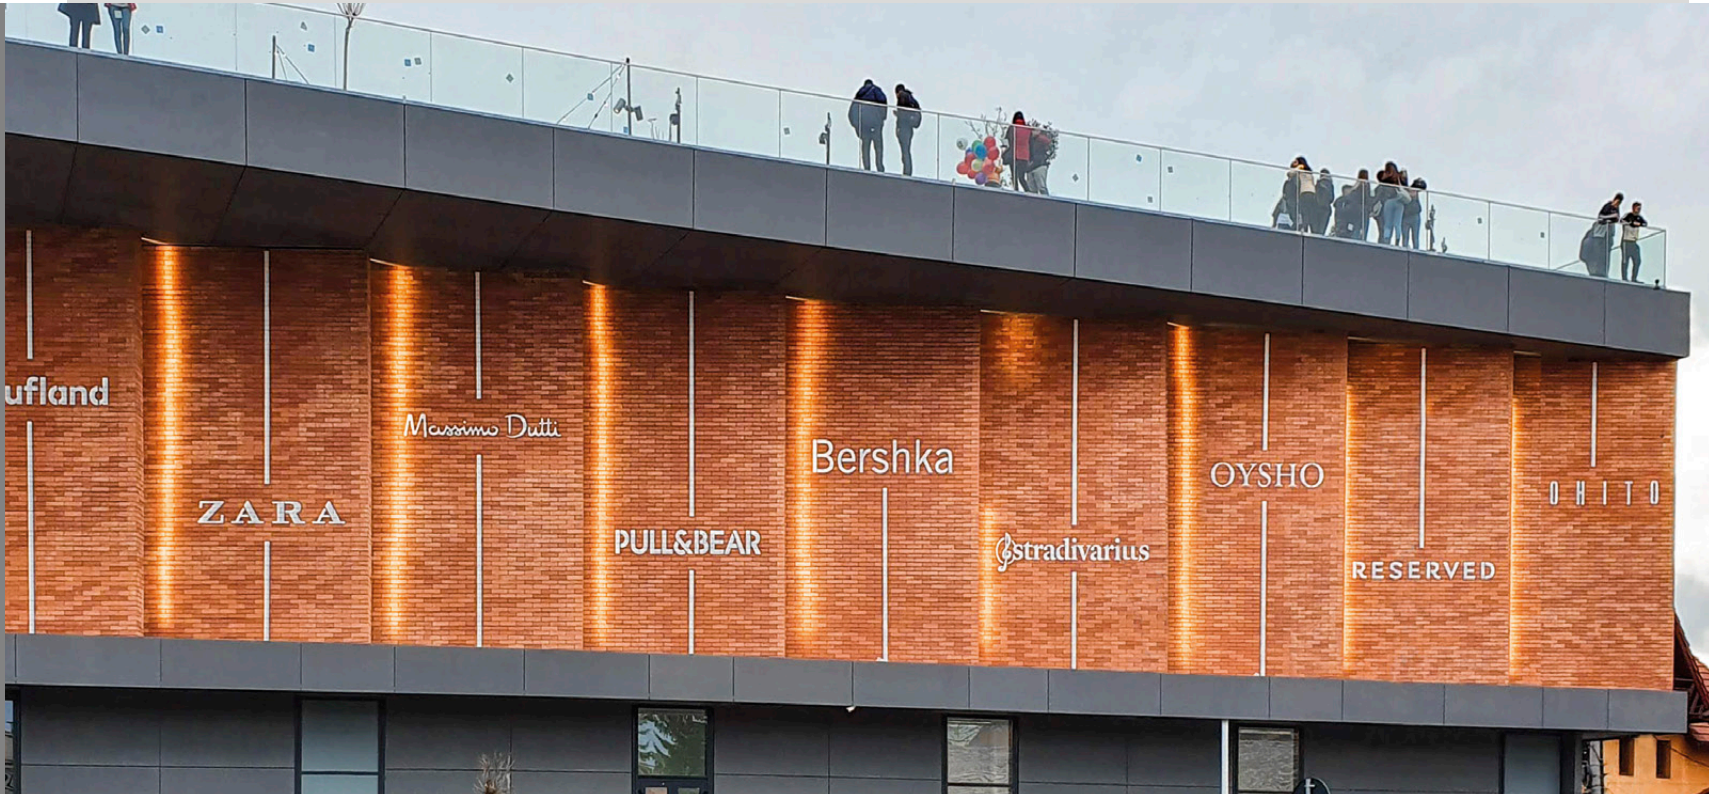


NATURAL AND TIMELESS



BT-10



BT-14

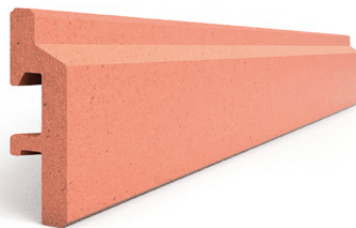

BT-21

(PROJECT) Promenada De Sibiu Shopping Mall. Rumania

ANCHORAGE

Horizontal
Multiple anchoring systems
Solutions made-to-measure

FINISHES

Body coloured
Glazed finishes
Raw surfaces
Innova colours

DIMENSIONS

Height: up to 300mm
Maximum length: 1200mm


PRODUCT DESCRIPTION

Weight: 30 kgs/m²
Thickness: 16mm
Standard joints: 4mm horizontal
Available in different geometries, finishes and colors

(*) Dimensions in millimetres

SOLUTIONS

TECHNICAL INFORMATION

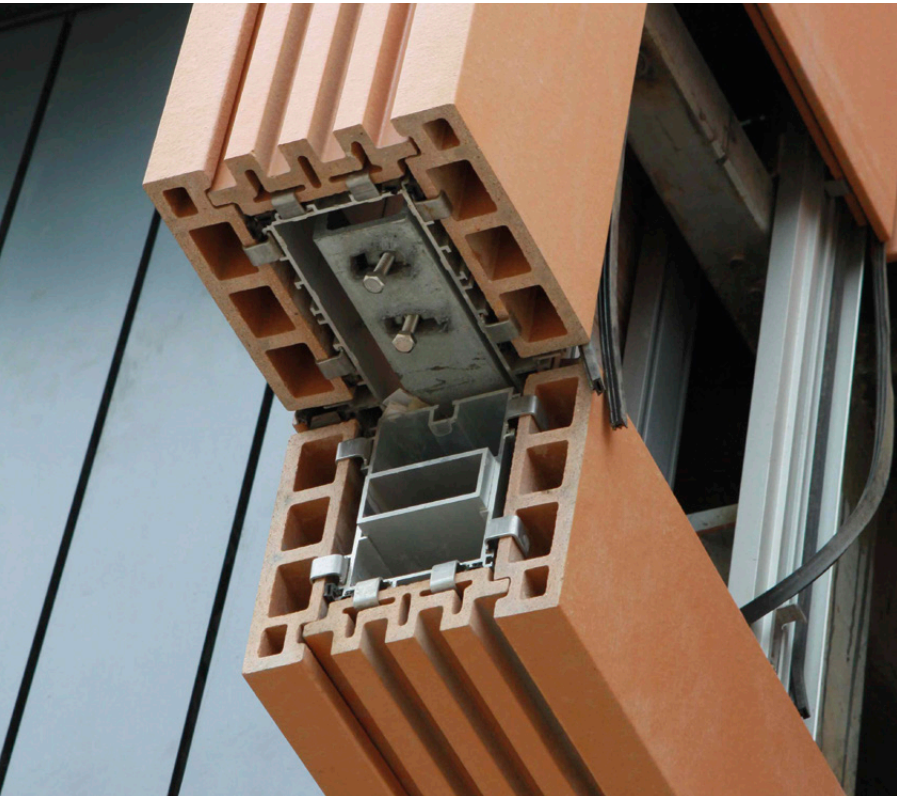

Range of products that give a more complete and technical finish to the installation of ventilated FAÇADEs. They cover the basic needs of project modulation and adapt to any architectural design.



CUSTOMISED SOLUTIONS FOR INDIVIDUAL FAÇADES



(PROJECT) Junju Tax Office. South Korea

ANCHORAGE

Horizontal and vertical
Multiple anchoring systems
Solutions made-to-measure

DIMENSIONS

Height: made-to-measure
Maximum length: 1500mm

FINISHES


Body coloured
Glazed finishes
Raw surfaces, plain tiles
Innova colours, plain tiles

DESCRIPTION


Monoblock tiles
Corners and mitred cuts
Crowning and sill



CORNERS
Monoblock

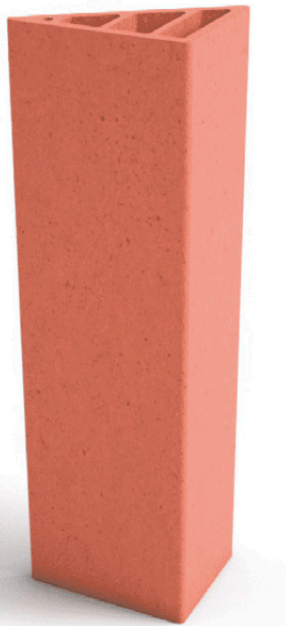


90°
monoblock




L= max.1500mm

135°
monoblock

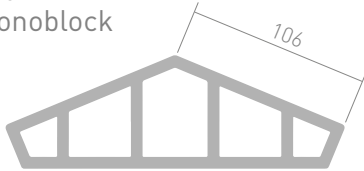


L= max.1500mm

CRISTOFOLI
monoblock



L= max.1500mm

CORNERS
Mitred

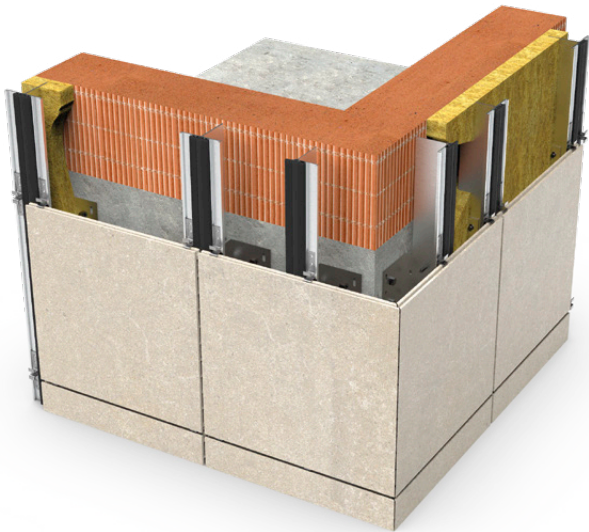


30°< to <150°

PILASTER





Piece made up of three parts

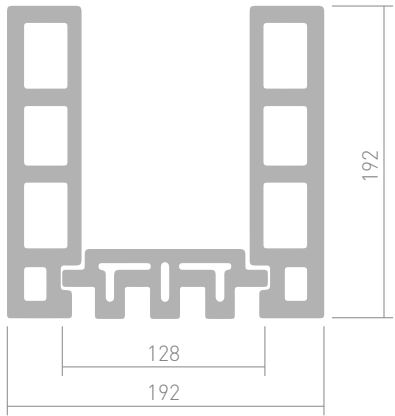



L= max.1500mm

SILL
monoblock

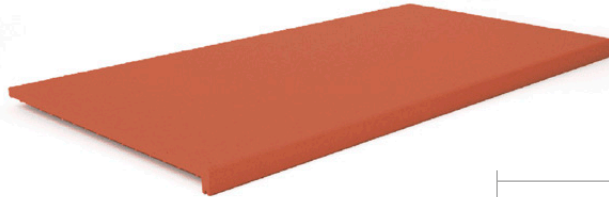

L= max.1500mm

COPING
monoblock

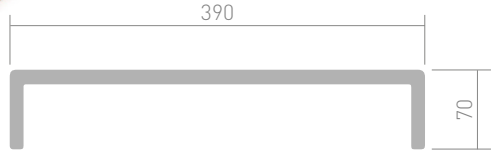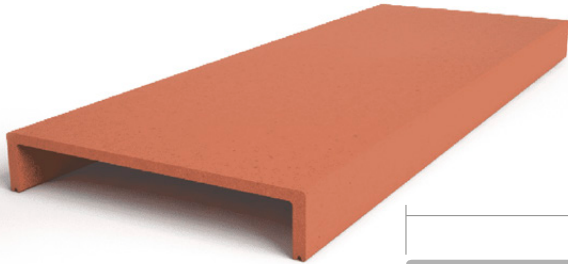

L= max.1500mm

(*) Dimensions in millimetres

FAVETON[®] DESIGN

The new architecture leads FAVETON and technical team to meet the particular needs of our customers every day. Unique, personalized designs that play with volume, textures and finishes.


FAVETON DESIGN allows architects to present their designs of extruded ceramics freely from a plane, with the shape and volume to suit the user’s needs, compared to the limitations posed by other materials.

DIMENSIONS


Thicknes: 80mm max

Height: 500mm max

Length: 1500mm max

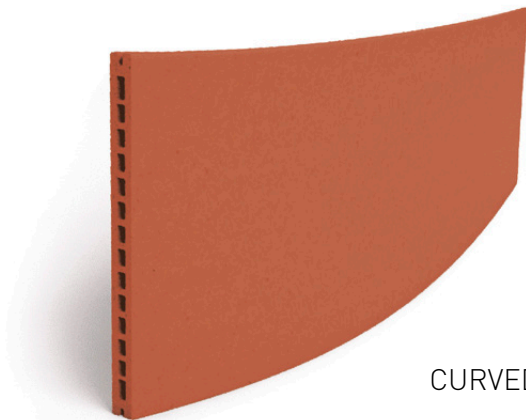

CURVED TILES

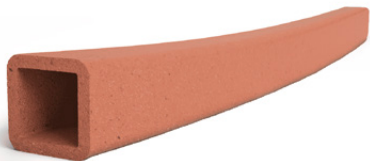

CURVED LOUVERS



CERAM 28 - 1C



CERAM 28 - 2C



CERAM 28 - 3C



(*) Dimensions in millimetres

THE PERFECT COLOR PALETTE FOR FAÇADES

FAVETON®

In FAVETON Colours you will find an expressive range of tones. This wide variety of shades are available in natural, glossy or even Inkjet finishes, which can be combined with almost all of our products, without any alteration of colour in order to create the best 360° building technical envelope.

We highlight our range of reddish and orange tones, representative of both our brand and our location.

Thinking on our future clients we put at your disposal our technical team to create any colour and customize the final product to the project or architectural needs.


The metallic and gritty finishes of our colour chart stand out for their amazing natural sight and feel. The INNOVA colour selection reproduces faithfully all kinds of finishes: Rocks, Woods, Rustic, Slate, Textile, Concrete. These colours are applied over all our flat tiles contributing to build a natural look with the benefits and performance of a ventilated façade. We create INNOVA to reproduce textures exclusively for different projects and clients, always with the advice of our technical team to get the best results.

PANTONE®

RAL

















NCS
Natural Color System®

FAVETON
TECHNICAL
SERVICE


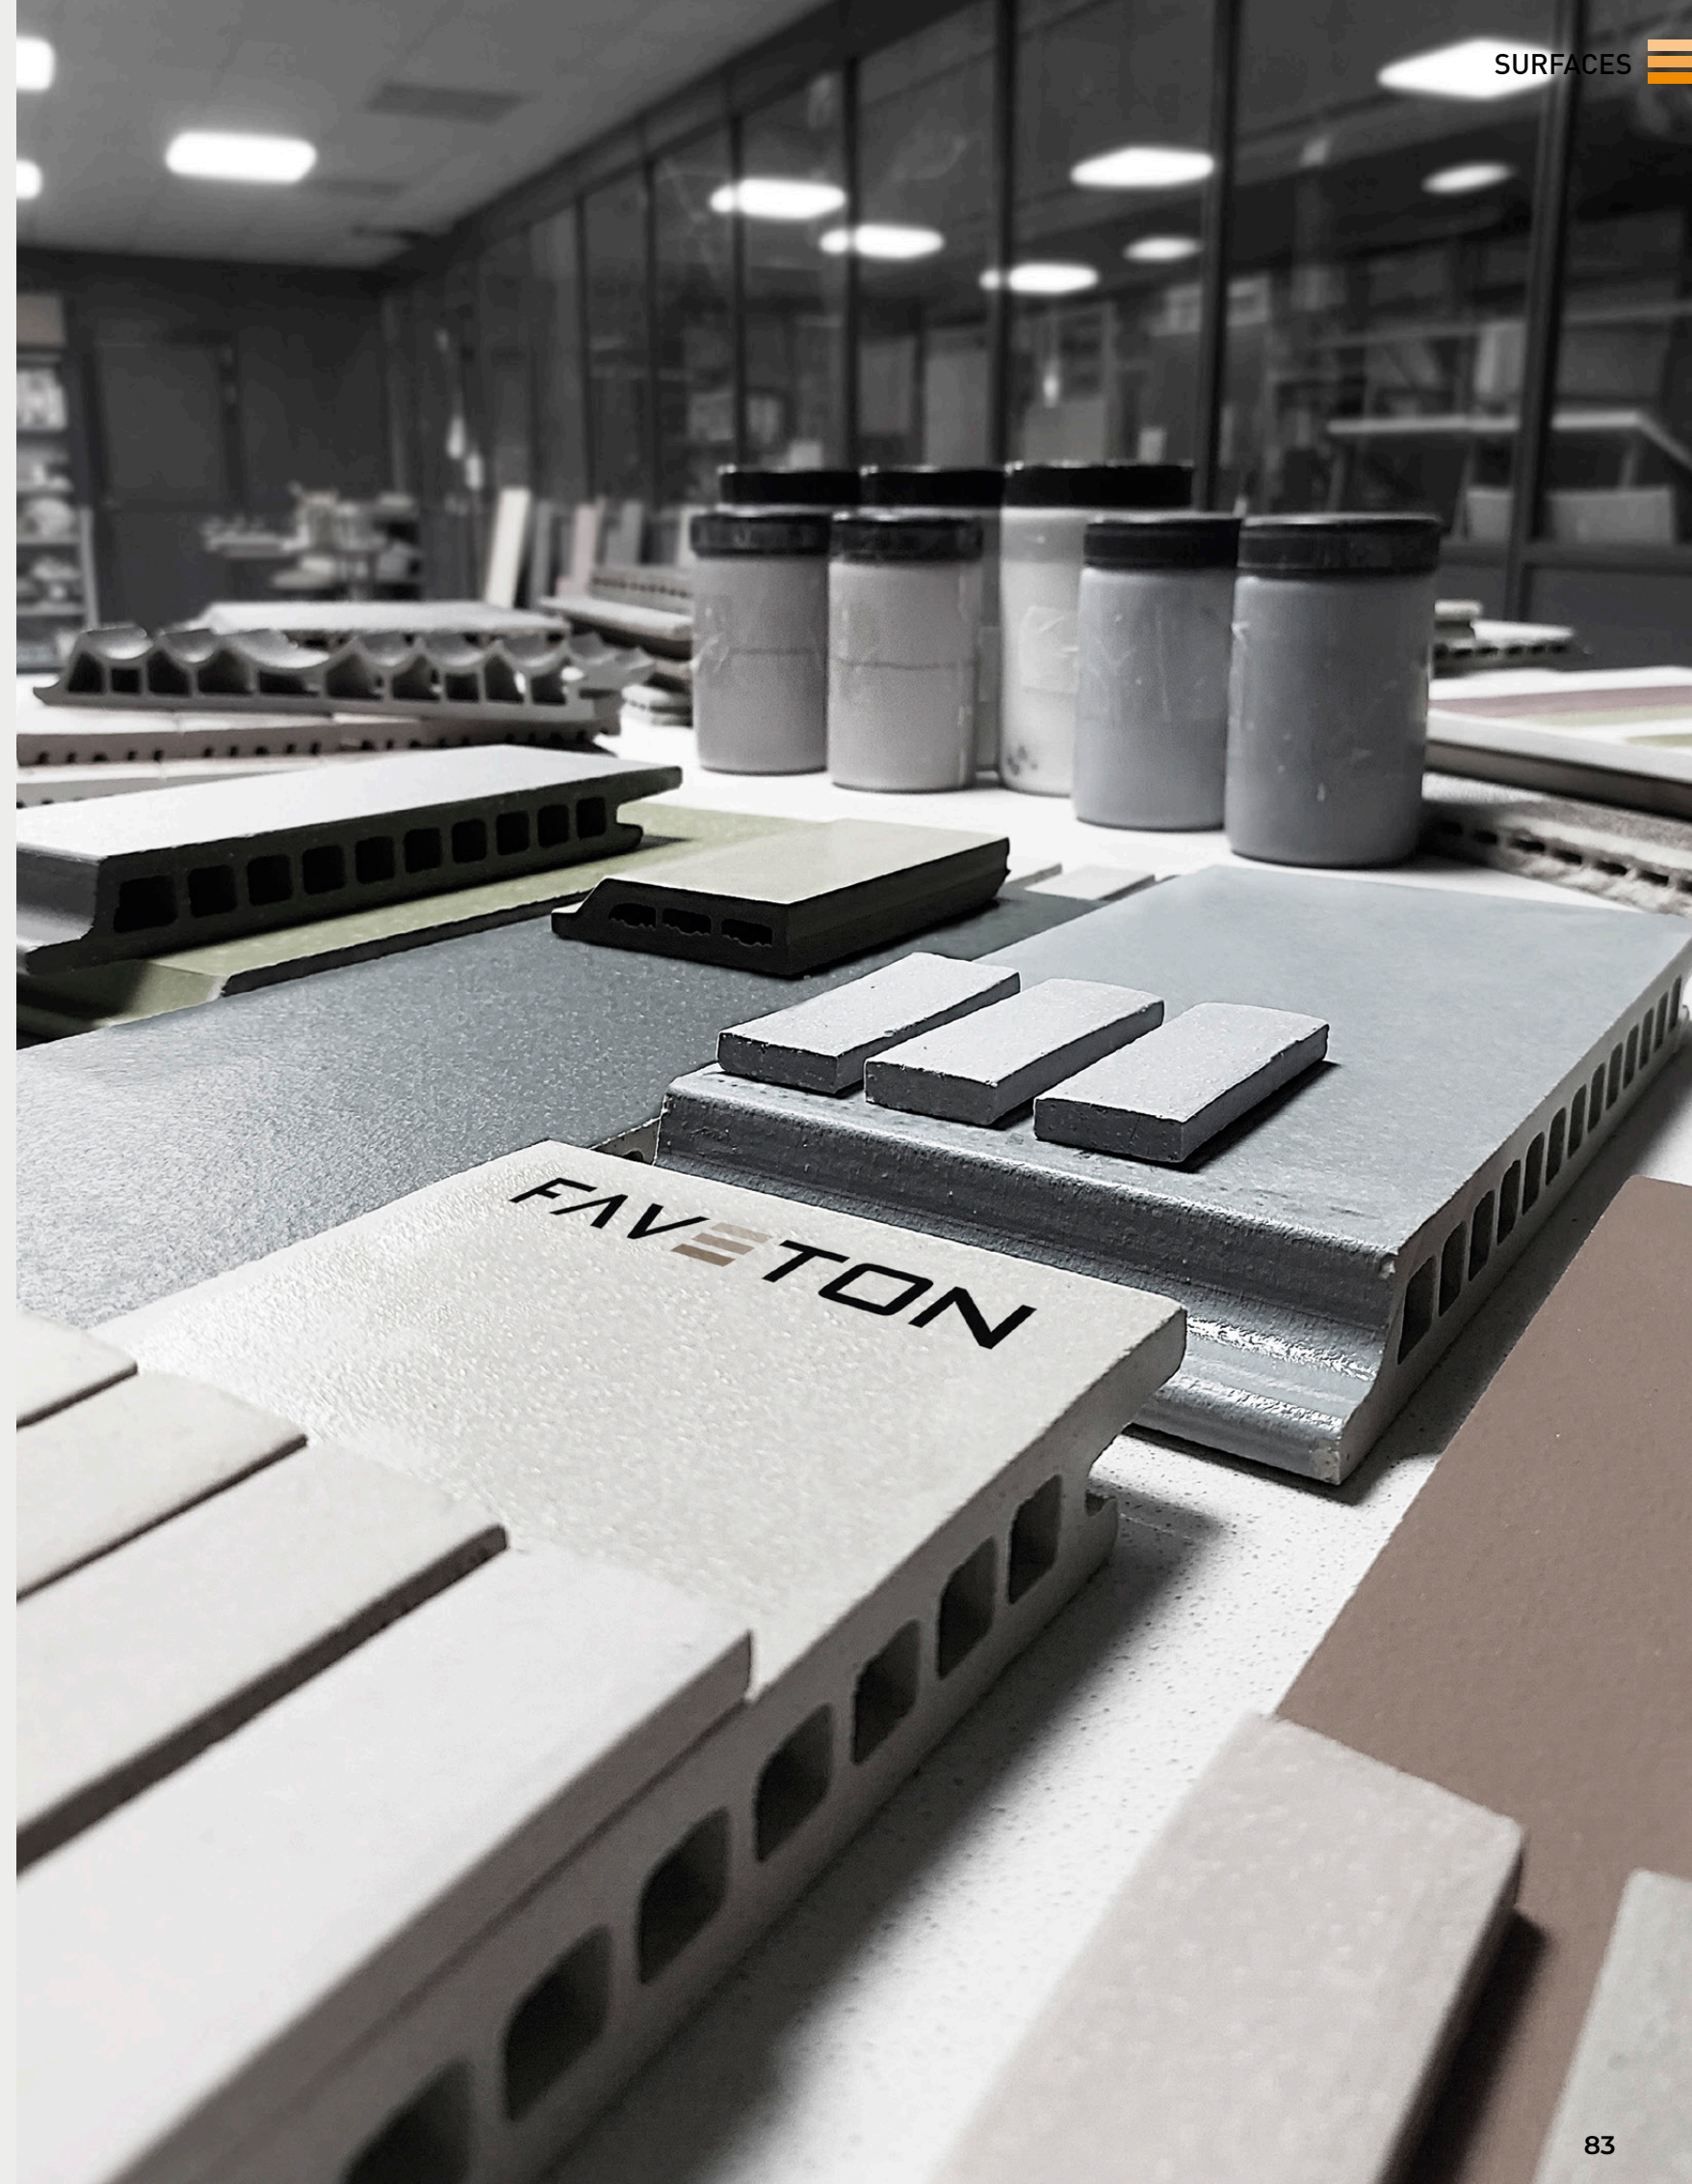


STANDARD

BODY COLOURED AND ENAMELLED

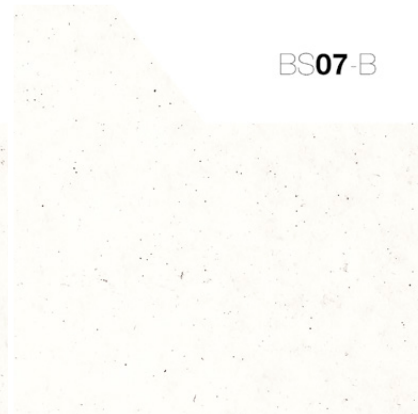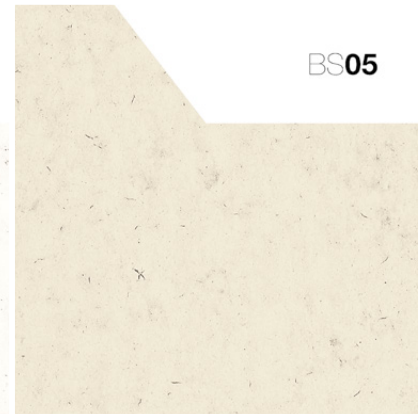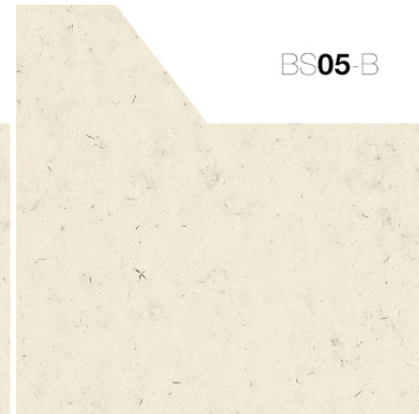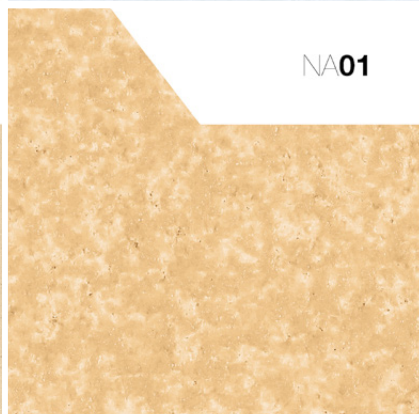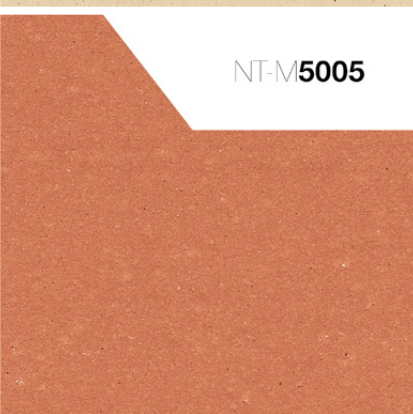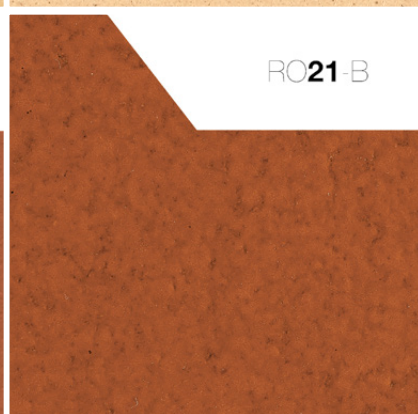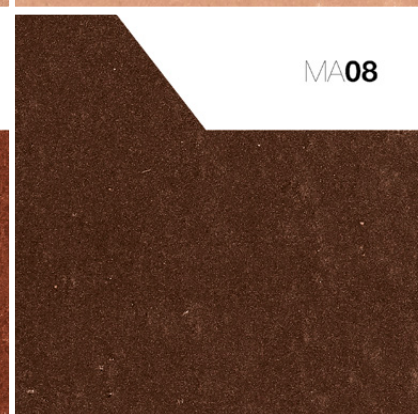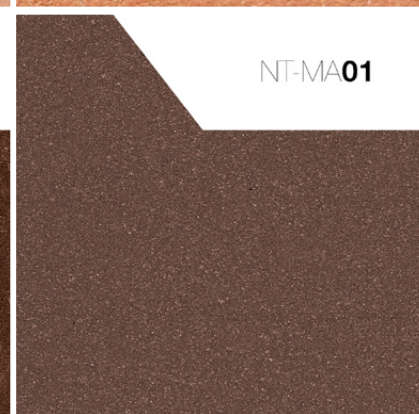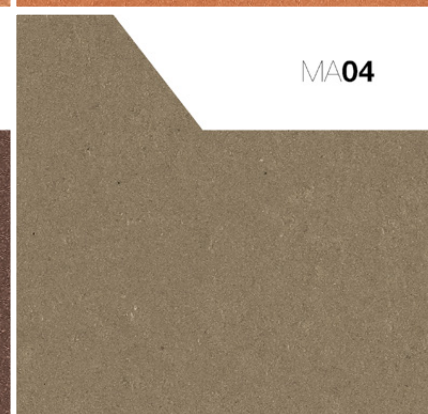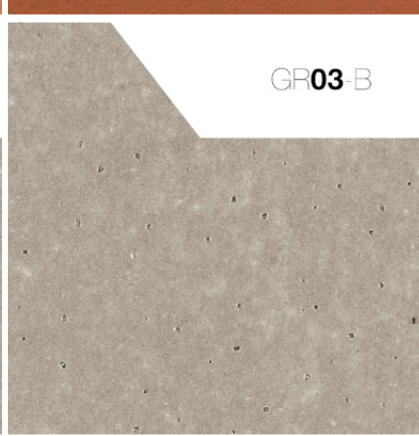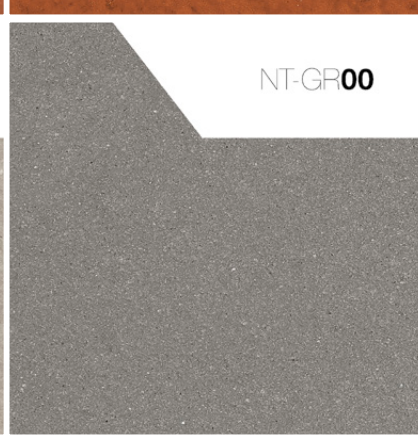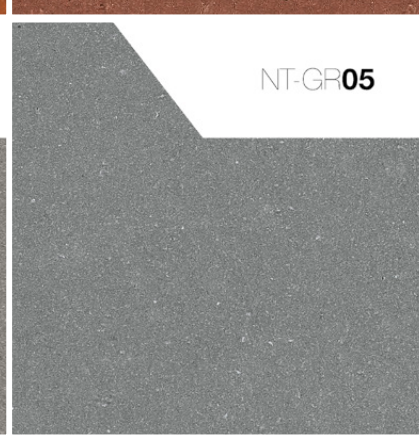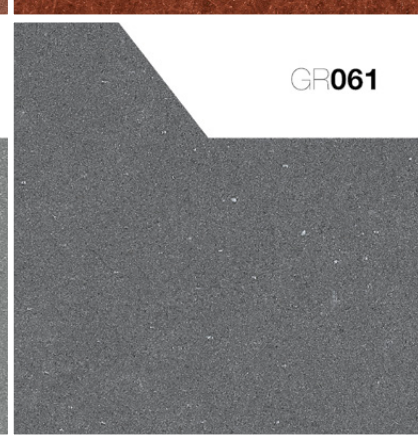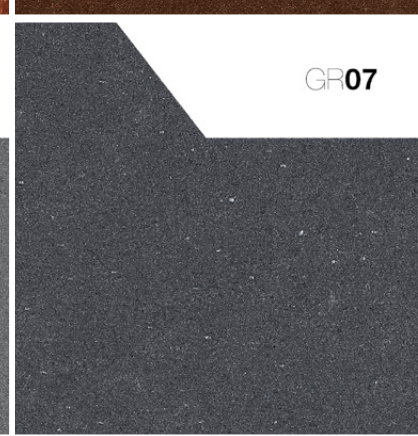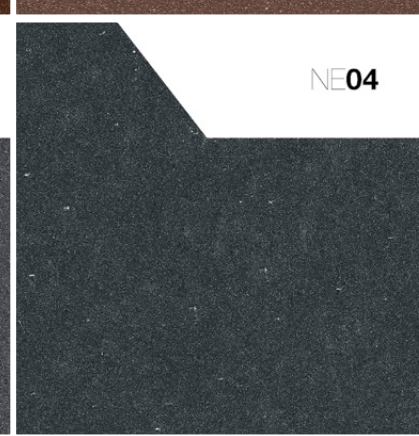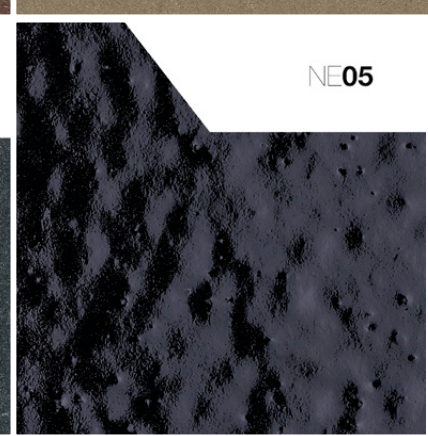 BS06	 BS08	 BS08-B	 BS07	 BS07-B	 BS05	 BS05-B	 BS00E
 BS00E-B	 NA01	 NT-NA01	 NA03	 NT-M50	 TE02	 RO011	 RO011-B
 NT-M5005	 RO21	 RO21-B	 NT-RO04	 RO04	 MA08	 NT-MA01	 MA04
 GR03	 GR03-B	 NT-GR00	 NT-GR05	 GR061	 GR07	 NE04	 NE05

GLAZED

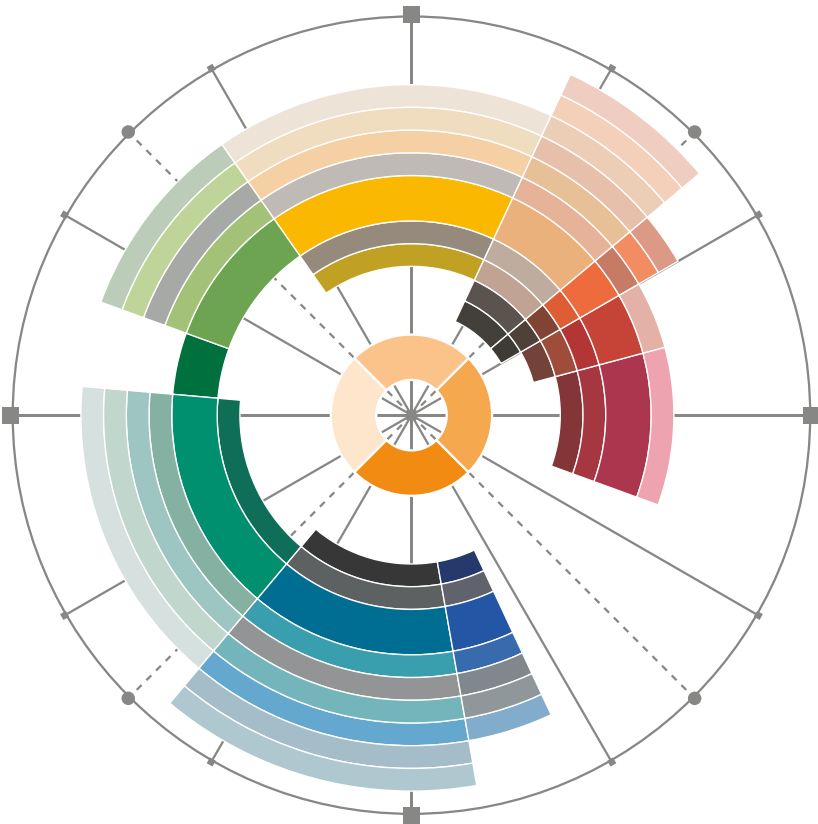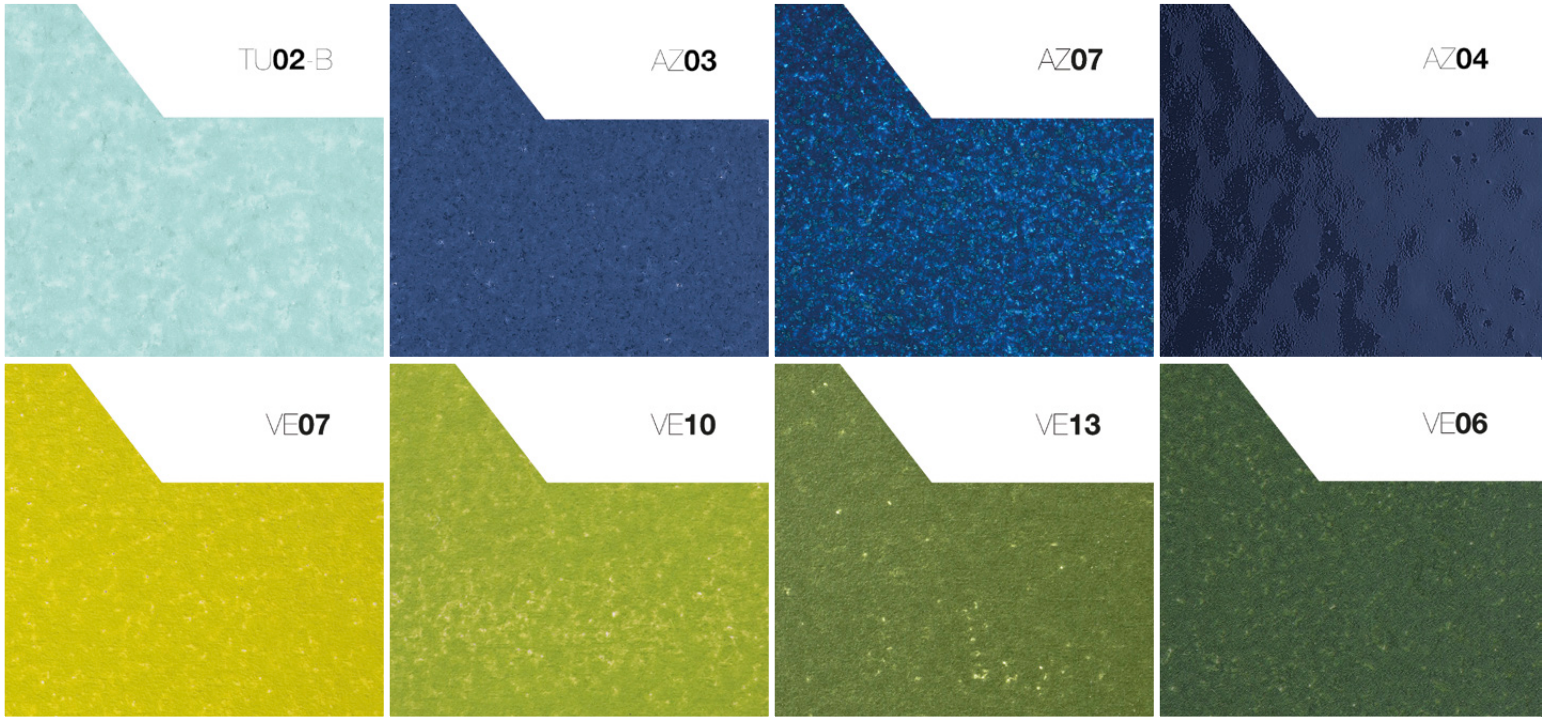

FAVETON laboratory division develops all kind of colours and textures tailored to projects


- Body coloured
- Glazed finishes
- Raw surfaces
- Innova colours

PANTONE®







APPLICABLE TILES




ACQUA




CERAM 20
PLAIN AND GROOVED




CERAM 28
PLAIN AND GROOVED



ELAR




BRICK TILE




DESINGS
PLAIN AND GROOVED




(PROJECT) Velaire Residencial. Spain

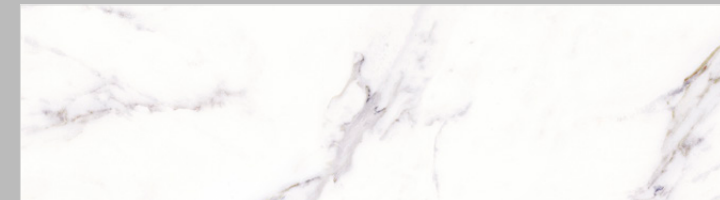

KALA
CALACATE MARBLE
RK04

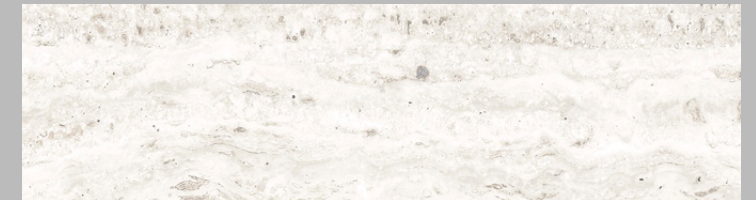

TRAVERTINO
TRAVERTINE MARBLE
RK09

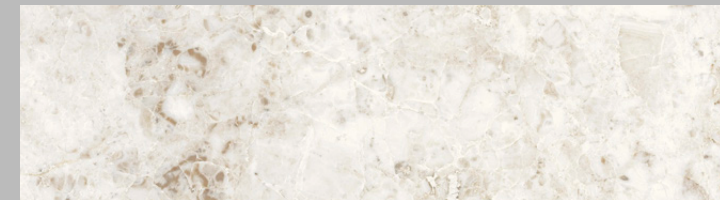

RAPOLANO
CROSSCUT MARBLE
RK07





GREY STONE
NATURAL LIMESTONE
RK08





BYBLOS
EARTHY LIMESTONE




PERSA
DESERT COLOURED SANDSTONE

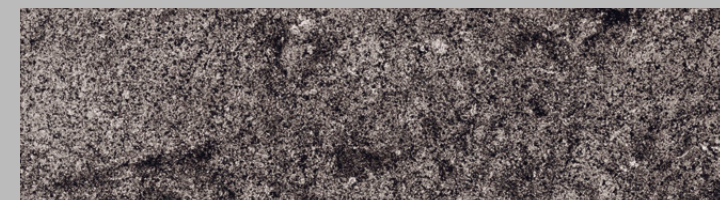

MIST
NATURAL GREY CHALK

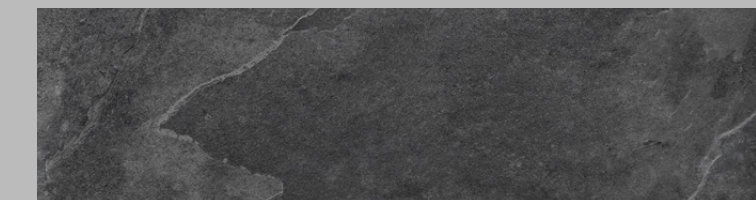


LASKA
SLATE STONE





RUSTIK

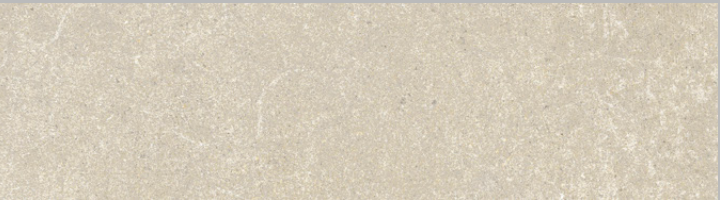

FUME

BEIGE TILE


RK10



RUSTIK SNOW

LIGHT CLAY


RT04

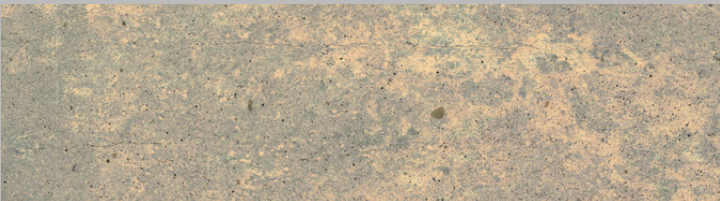

RUSTIK MIX

MULTICOLOURED TERRACOTTA

RT02

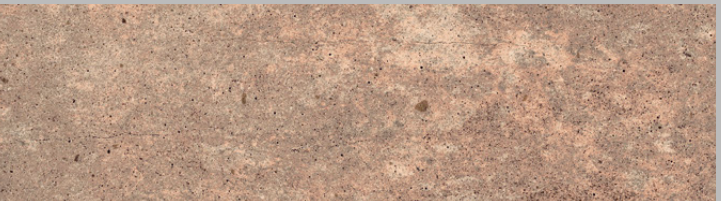

RUSTIK SAND

SANDY TERRACOTTA


RT03



TEJA

LIGHT RED

RT08

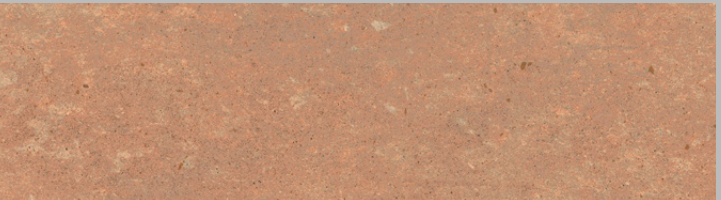

RUSTIK RED

RUSSIAN RED

RT01



RUSTIK OXIDE

BLACK AND RED FUSION

RT06



DANÉS

ANTHRACITE TILING

RT07



DEKA

WD02



NATURAL

WD11



MAPPLE

WD12




ZENO

WD01



OAK

WD13

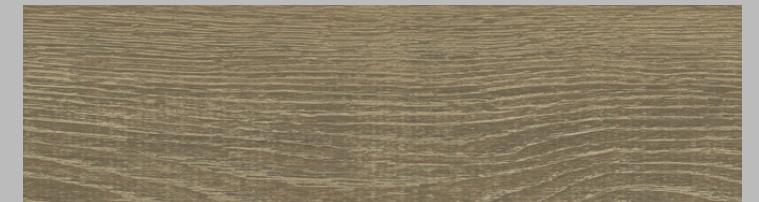

TEKA

WD14



JAMBI

WD04



QATAR

WD06




ANTICO

WD15



CHERRY

WD07

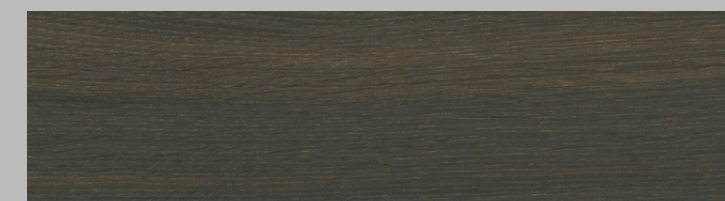


WENGUE

WD08

DESIGN



TEXTILE

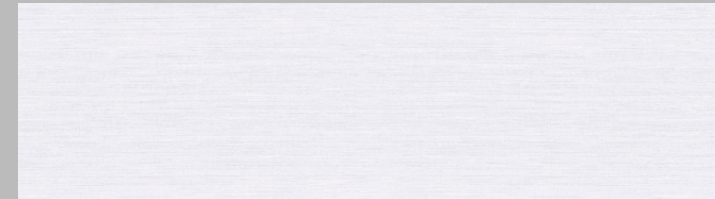

SILK

NATURAL FABRIC WITH SOFT TEXTURE


TX01



MAYA

FINE FABRIC THAT CREATES A NET

TX03

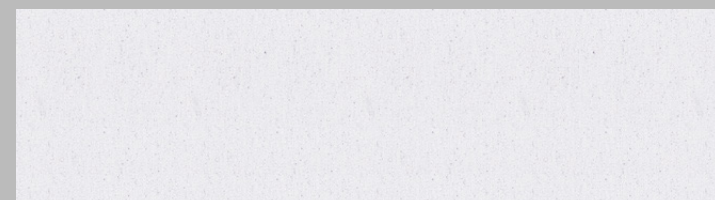

RAFFIA

FABRIC FORMED BY CROSSING ELEMENTS

TX02




RAFFIA DARK

SHADOW FABRIC

TX05

EXPRESSION

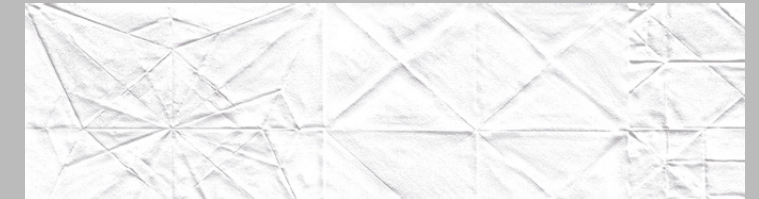

PAPER

CRUMPLED PAPER

EX04



CEMENT

SHADOW FABRIC

CM01



ACQUAREL

A SOFT WATERCOLOR


EX01



DRAFT

FREEHAND DRAWN LINES

TX05

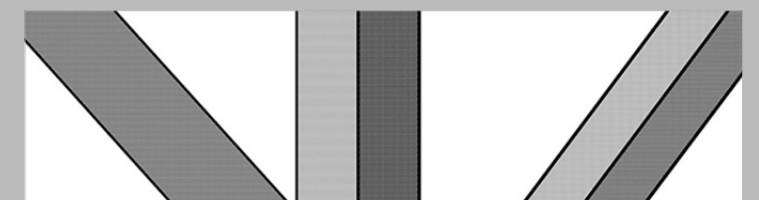

PATTERN

PATTERN IN A POLYGONAL DESIGN

EX02

TECHNOLOGY

FAVETON®

FAVETON stands out for being a highly technical ventilated façade system. Our team has developed multiple possibilities creating different substructure systems, that adjust to every product and that adjust to the needs of each project.

Our experience of more than 50 years in the ceramic sector, consolidates us as one of the most recognizable brands which has investigated the most in extruded tiles production, accompanied by a great development in the creation of fixation systems, providing new possibilities and evolving with the architectural needs of the moment.

Each of our new products counts with the supervision of our technical team formed by architects, engineers and qualified technicians. We review each project, from the architect's point of view and provide the better options for each site or building. Capable of developing new anchoring systems if the complexity of the project requires it.

A++
SUSTAINABLE
ARCHITECTURE

TECH
SOLUTIONS

FAVETON
TECHNICAL
SERVICE

(PROJECT) Tamdeen Square. Kuwait



[PROJECT] Hyundai Insurance Training Institute, South Korea




SAO



HORIZONTAL SYSTEM

- 1. Plastic Anchor
- 2. Omega Aluminum Vertical Profile (PFC)
- 3. Epdm
- 4. Clip 15 Mm
- 5. Faveton Ceramic Tile
- 6. Slab
- 7. Wall

APPLICABLE TILES




ACQUA




CERAM 20





CERAM 28

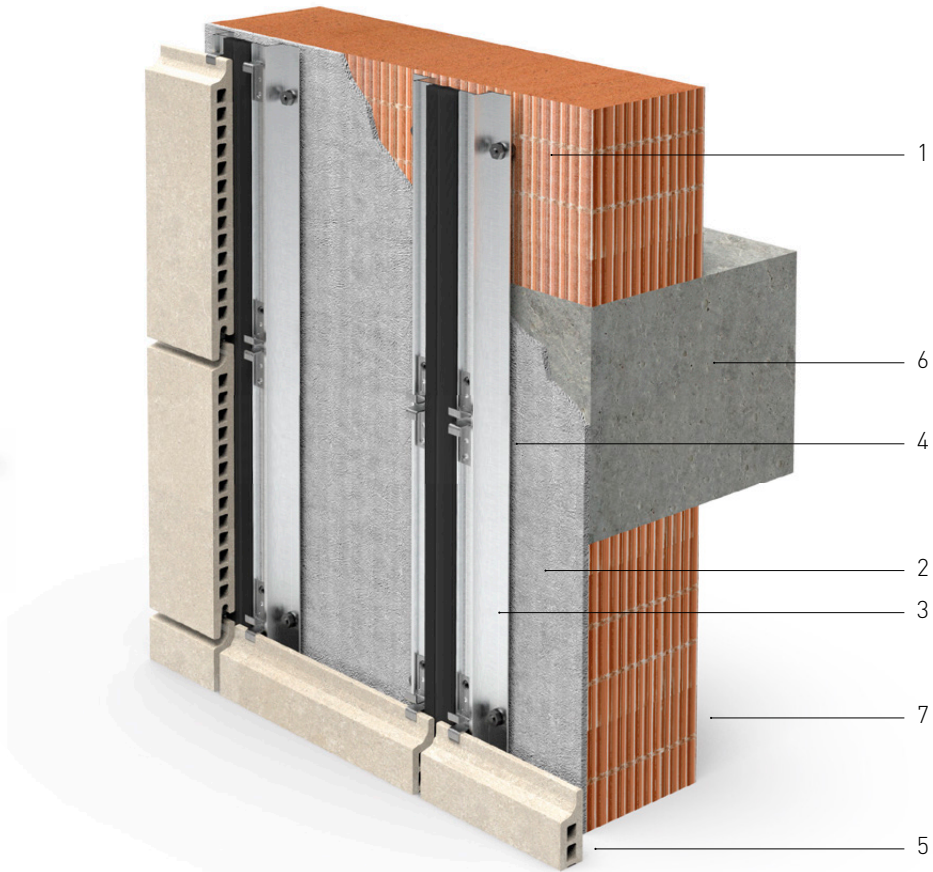


VERTICAL SECTION

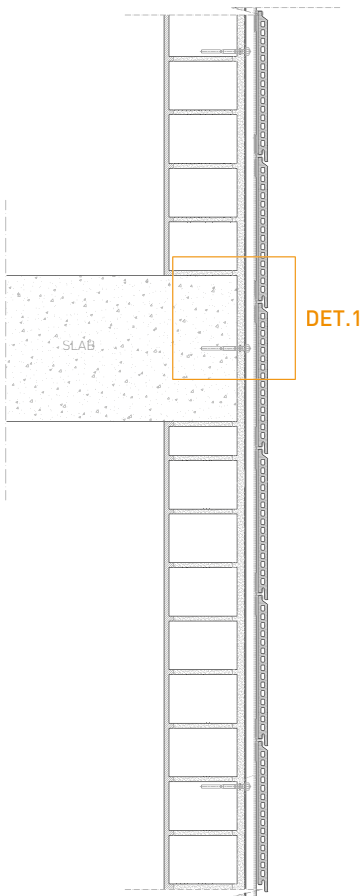

HORIZONTAL SECTION

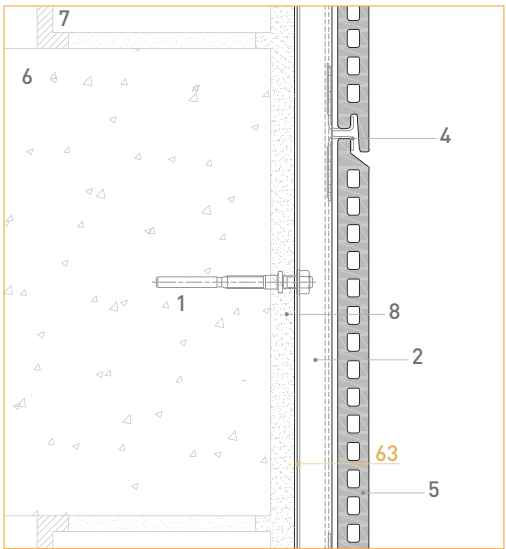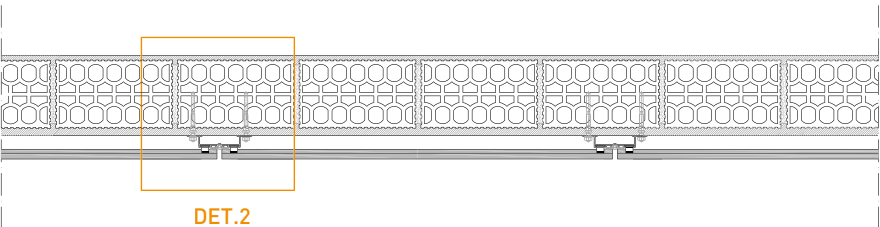

1. Support bracket

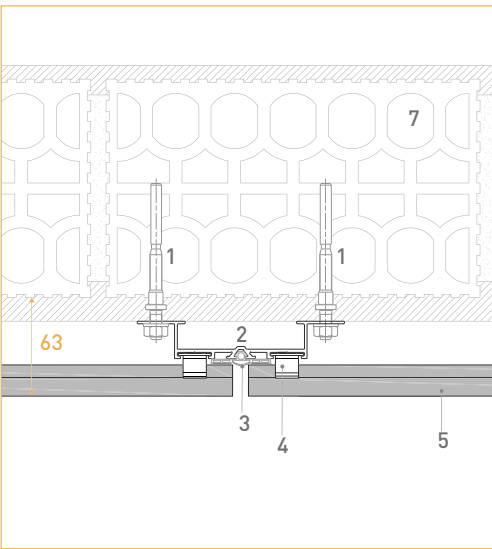


2. Horizontal detail


HORIZONTAL SYSTEM

1. Support bracket
2. Stop bracket
3. Slab
4. Wall
5. Vertical Aluminum Profile (PFC)
6. Insulation
7. Plastic Anchor
8. EPDM joint
9. Autoscrew N12 5,5x25 with washer
10. Autoscrew N12 5,5x22 without washer
11. CLIP 15 mm
12. FAVETON Ceramic Tile



APPLICABLE TILES

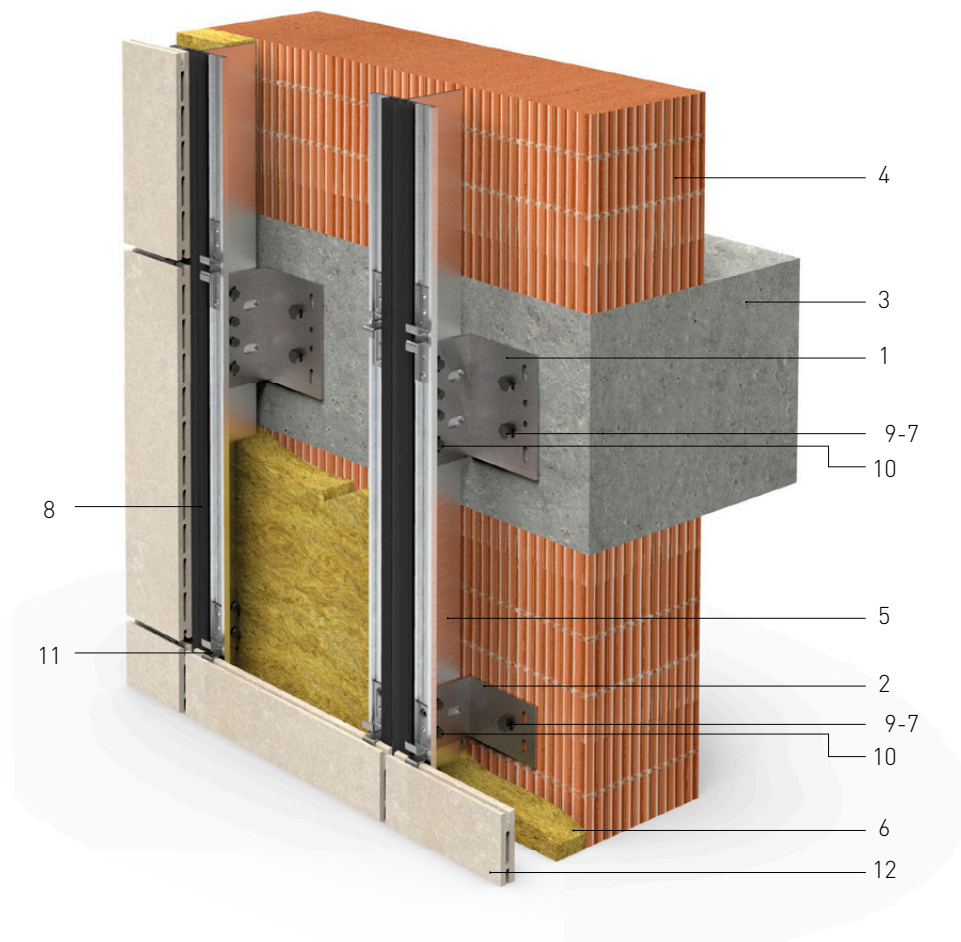

VERTICAL SECTION

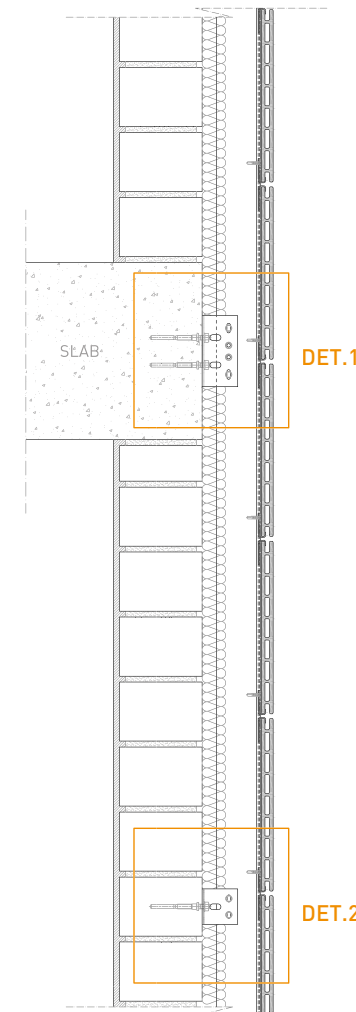

HORIZONTAL SECTION

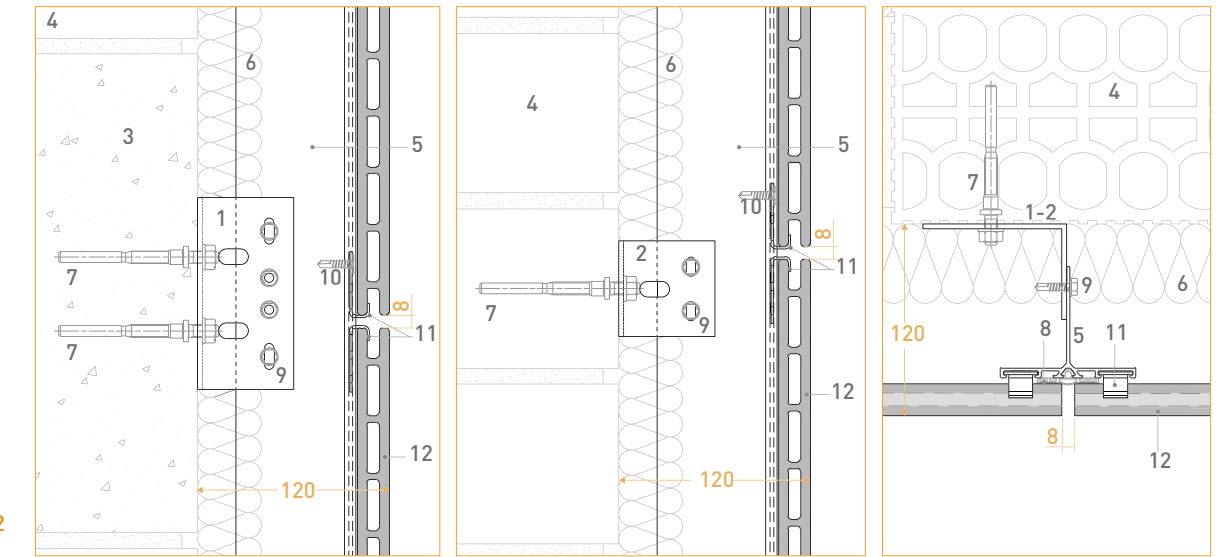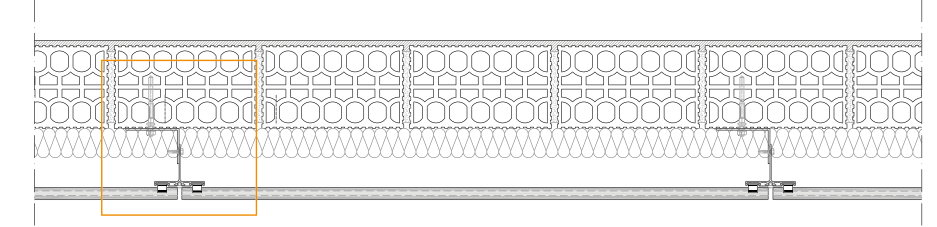

1. Support bracket


2. Stop bracket

3. Horizontal detail

VERTICAL SYSTEM

1. Support bracket
2. Stop bracket
3. Slab
4. Wall
5. Vertical Aluminum Profile (PFC)
6. Insulation
7. Plastic Anchor
8. EPDM joint
9. Autoscrew N12 5,5x25 with washer
10. Autoscrew N12 5,5x22 without washer
11. CLIP 15 mm
12. FAVETON Ceramic Tile


APPLICABLE TILES

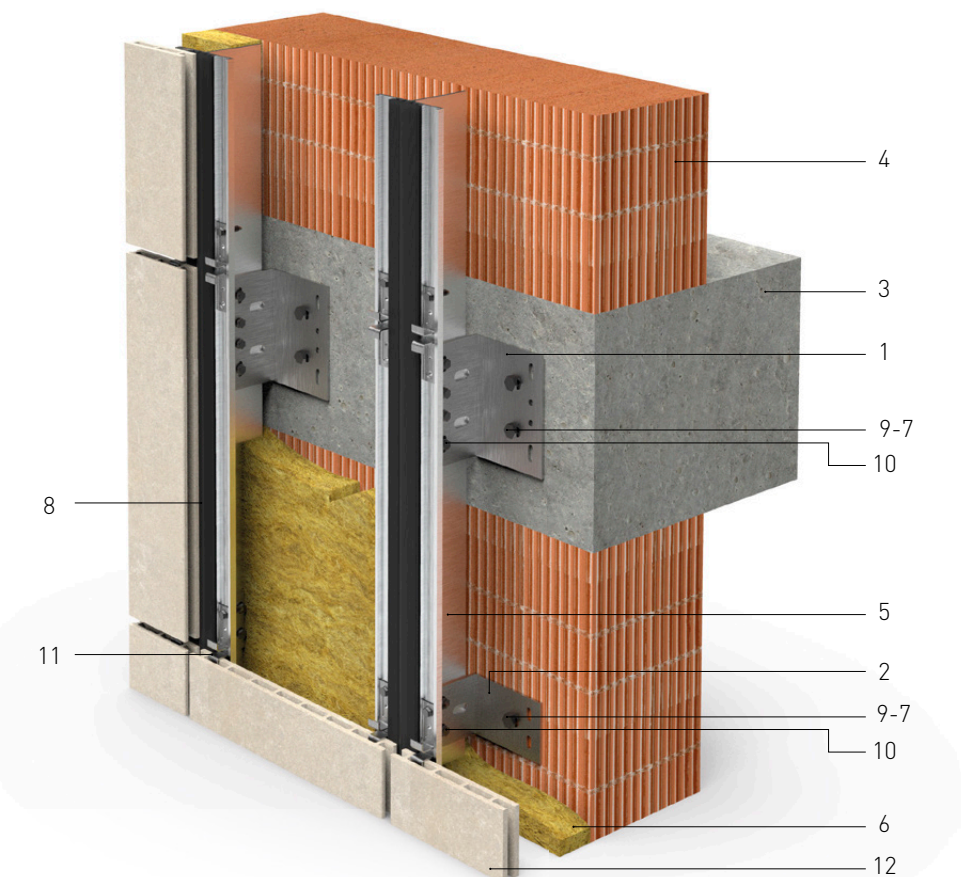

HORIZONTAL SYSTEM


1. Support Bracket
2. Stop Bracket
3. Slab
4. Wall
5. Vertical Aluminum Profile (PFC)
6. Insulation
7. Plastic Anchor
8. Epdm Joint
9. Autoscrew N12 5,5x25 With Washer
10. Autoscrew N12 5,5x22 Without Washer
11. Horizontal Aluminum Profile (PFF)
12. Faveton Ceramic Tile

APPLICABLE TILES

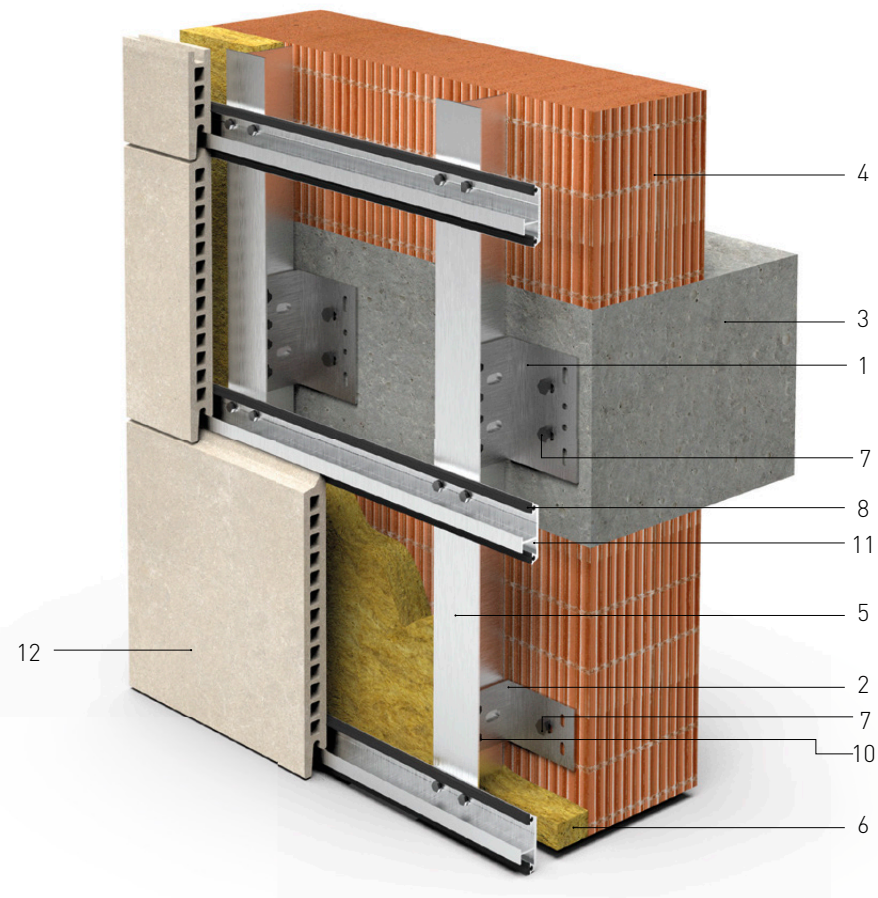

VERTICAL SECTION


HORIZONTAL SECTION

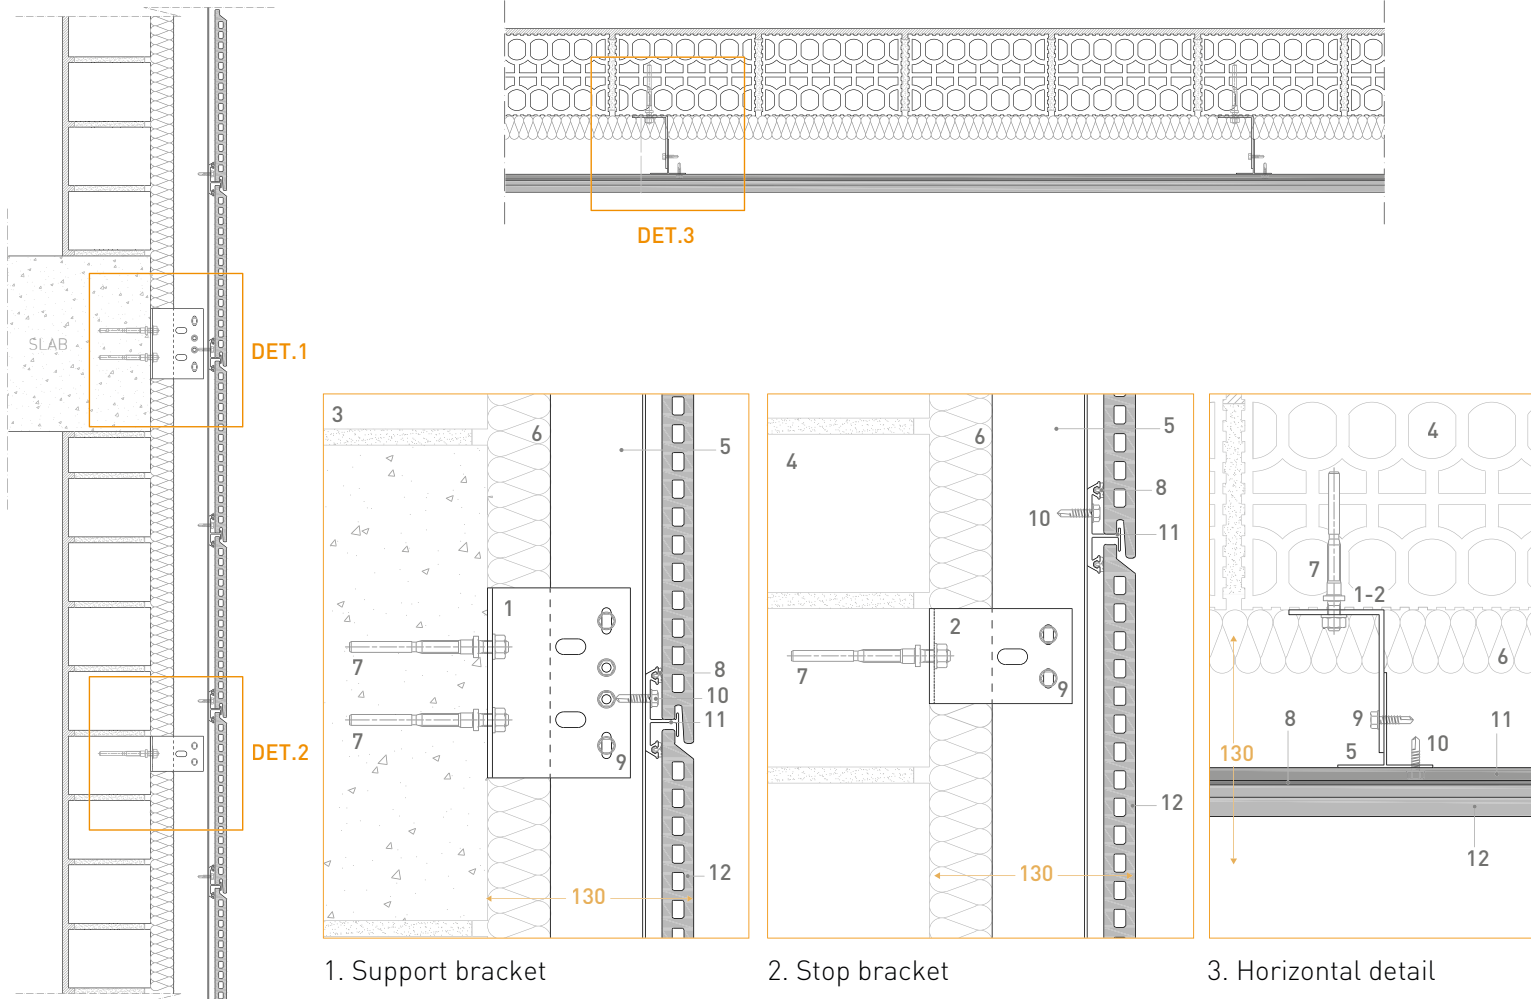

HORIZONTAL SYSTEM


1. Support Bracket
2. Stop Bracket
3. Slab
4. Wall
5. Vertical Aluminum Profile (PFC)
6. Insulation
7. Plastic Anchor
8. Omega Horizontal Aluminum Profile (PFF)
9. Autoscrew N12 5,5x25 With Washer
10. Autoscrew N12 5,5x22 Without Washer
11. Clip 115x67x1.5 Mm
12. Faveton Ceramic Tile

APPLICABLE TILES

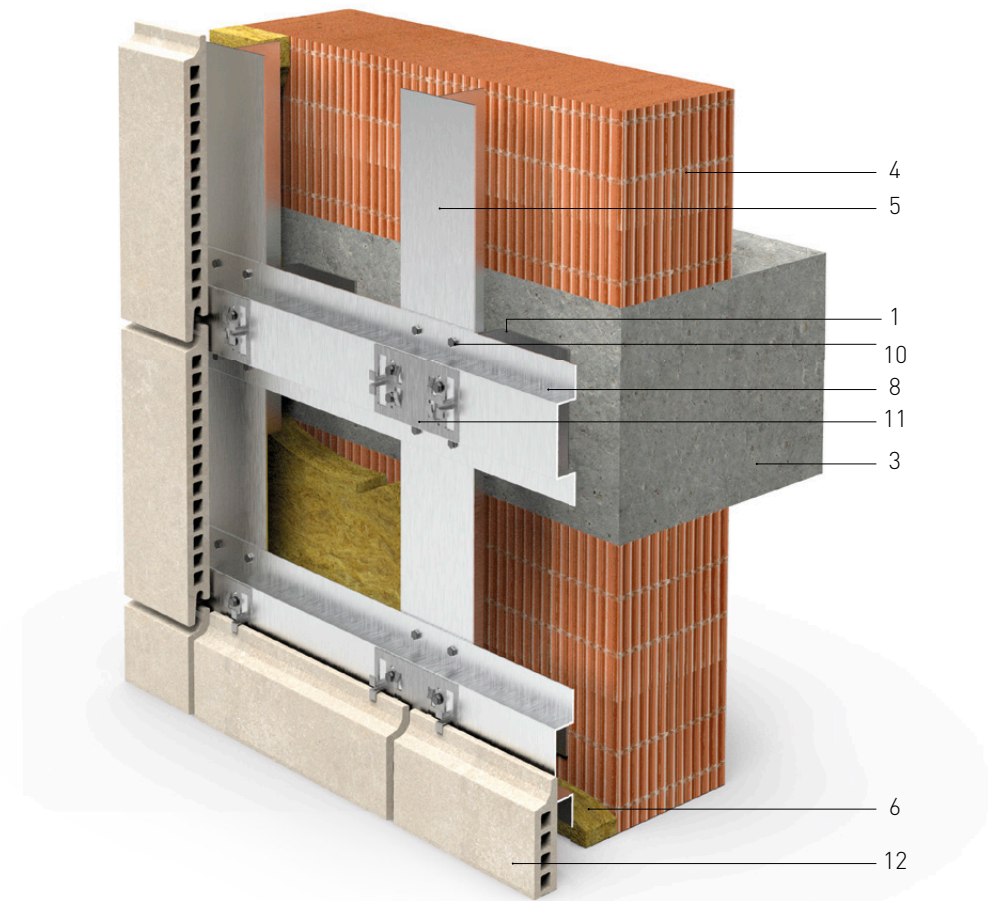

VERTICAL SECTION


HORIZONTAL SECTION

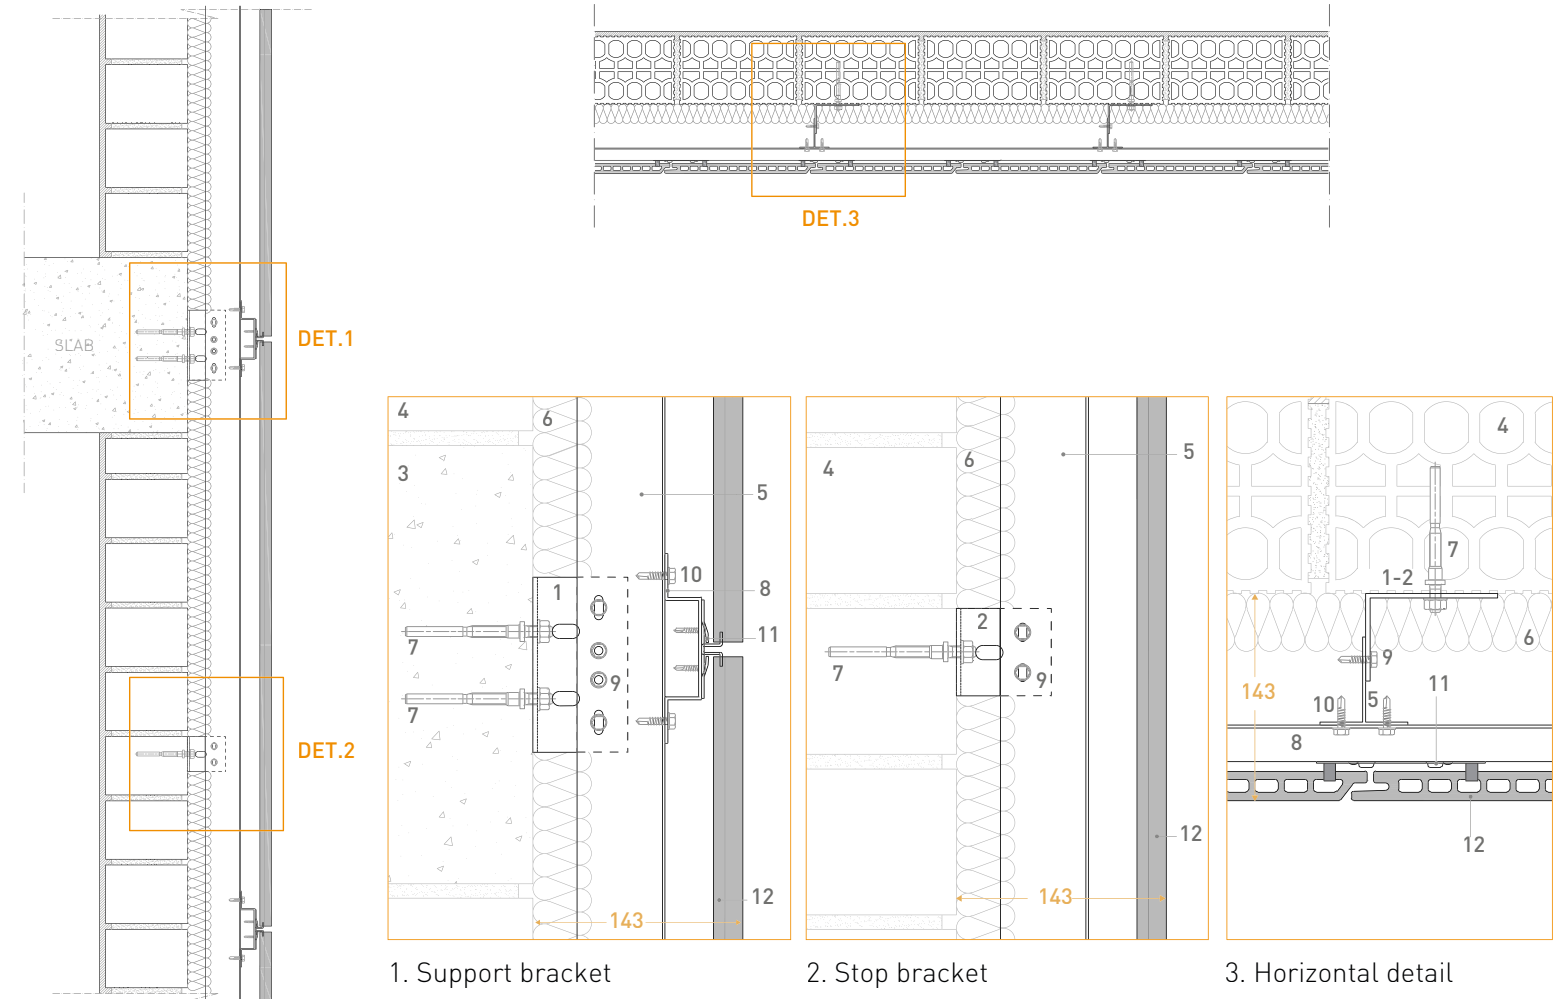


HORIZONTAL SYSTEM

1. Support Bracket
2. Stop Bracket
3. Slab
4. Wall
5. Vertical Aluminum Profile (PFC)
6. Insulation
- 7.Anchor
8. Profile Connection Piece
9. Autoscrew N12 5,Sx25 With Washer
10. Autoscrew N12 5,Sx22 Without Washer
11. Clip 15 Mm
12. Faveton Ceramic Tile



APPLICABLE TILES

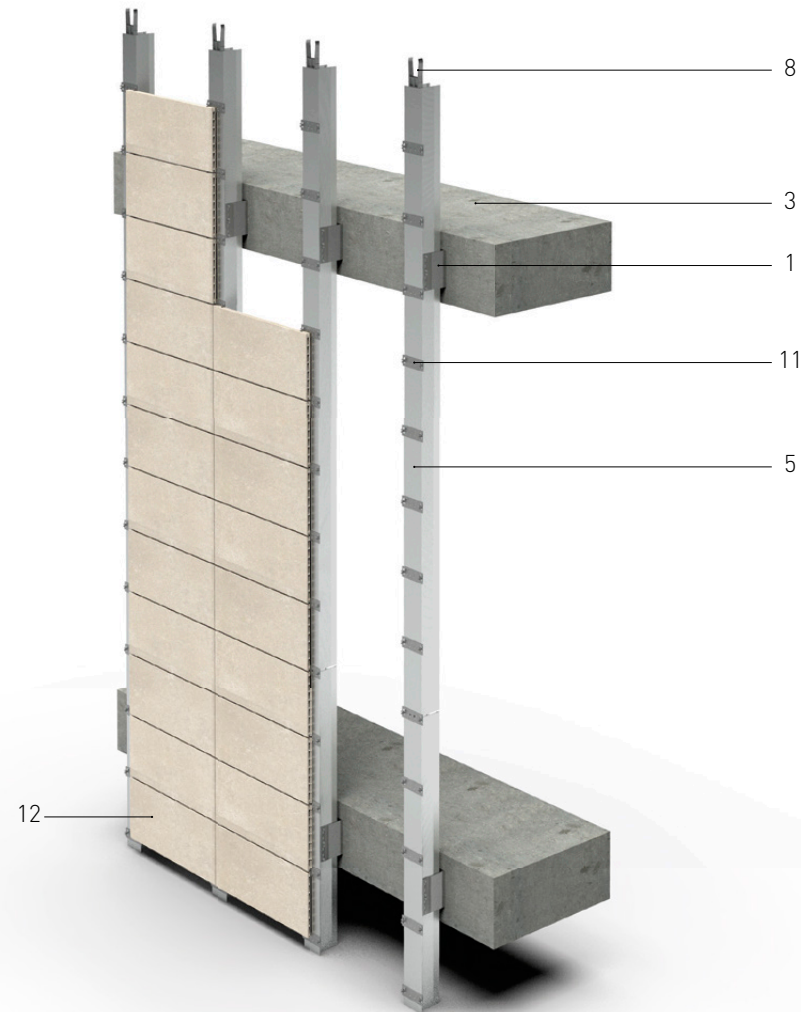

VERTICAL SECTION

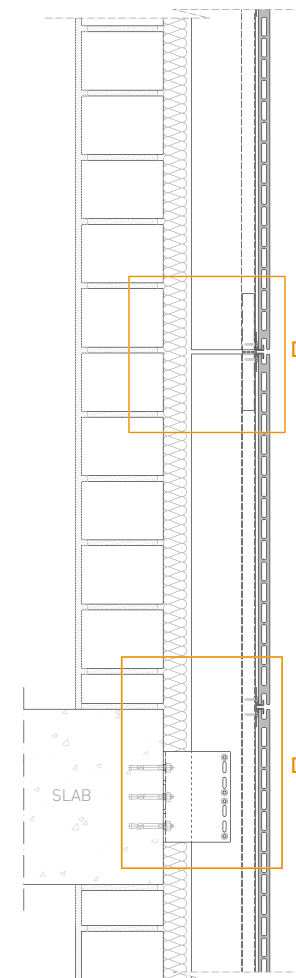

HORIZONTAL SECTION

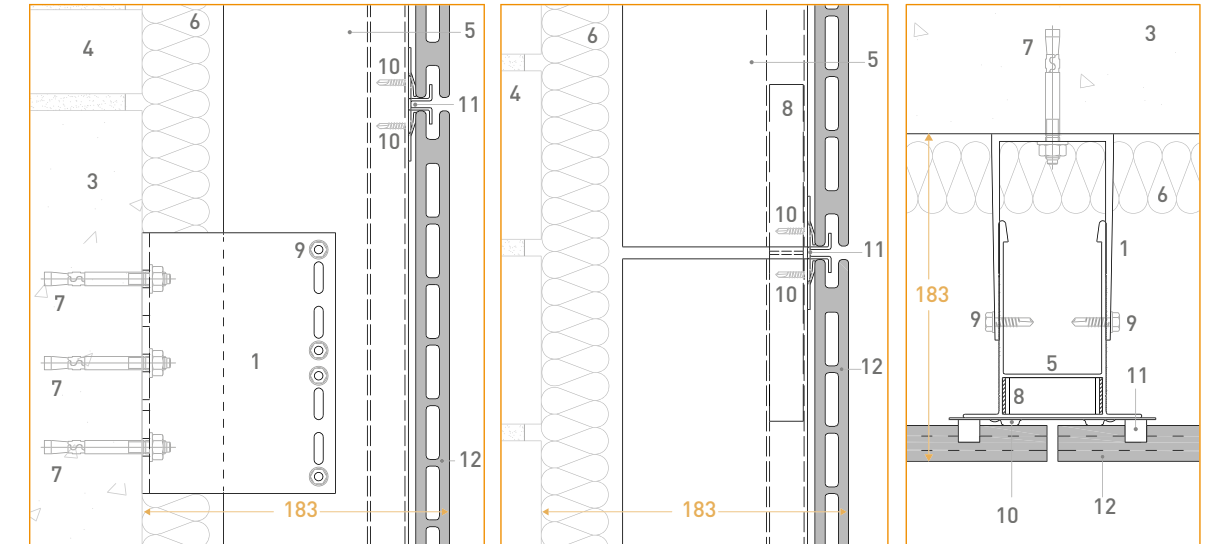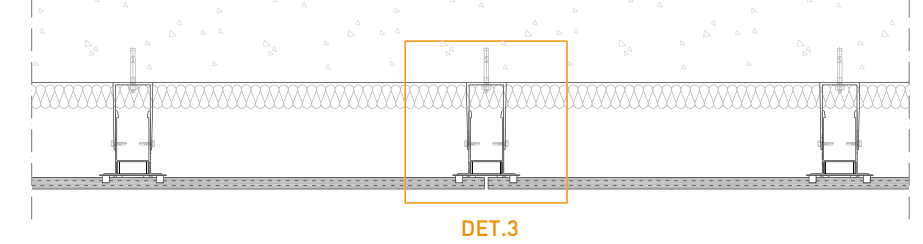

1. Support bracket


2. Stop bracket

3. Horizontal detail

VERTICAL SYSTEM

1. Support Bracket
2. Stop Bracket
3. Slab
4. Wall
5. Vertical Aluminum Profile (PFC)
6. Insulation
- 7.Anchor
8. Profile Connection Piece
9. Autoscrew N12 5,Sx25 With Washer
10. Autoscrew N12 5,Sx22 Without Washer
11. Clip 15 Mm
12. Faveton Ceramic Tile

APPLICABLE TILES

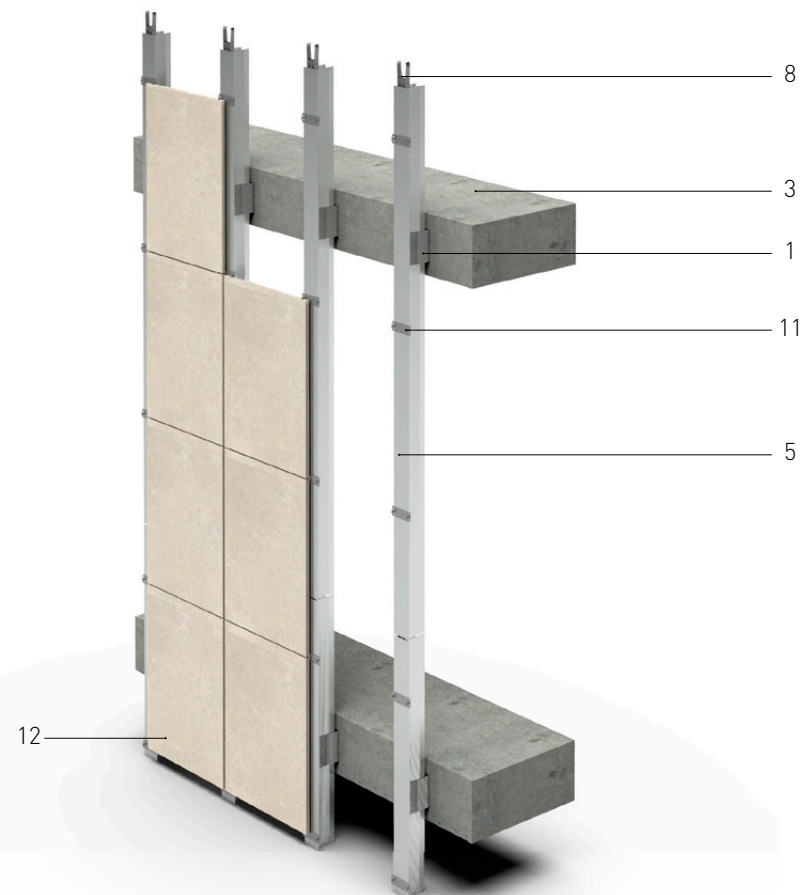


HORIZONTAL SYSTEM

- 1. Support Bracket
- 2. Stop Bracket
- 3. Slab
- 4. Wall
- 5. Vertical Aluminum Profile (PFC)
- 6. Insulation
- 7. Plastic Anchor
- 8. Autoscrew N12 5,5x25 With Washer
- 9. Autoscrew N12 5,5x22 Without Washer
- 10. Horizontal Aluminum Profile (PFF)
- 11. Faveton Ceramic Tile


APPLICABLE TILES



ELAR ROOF

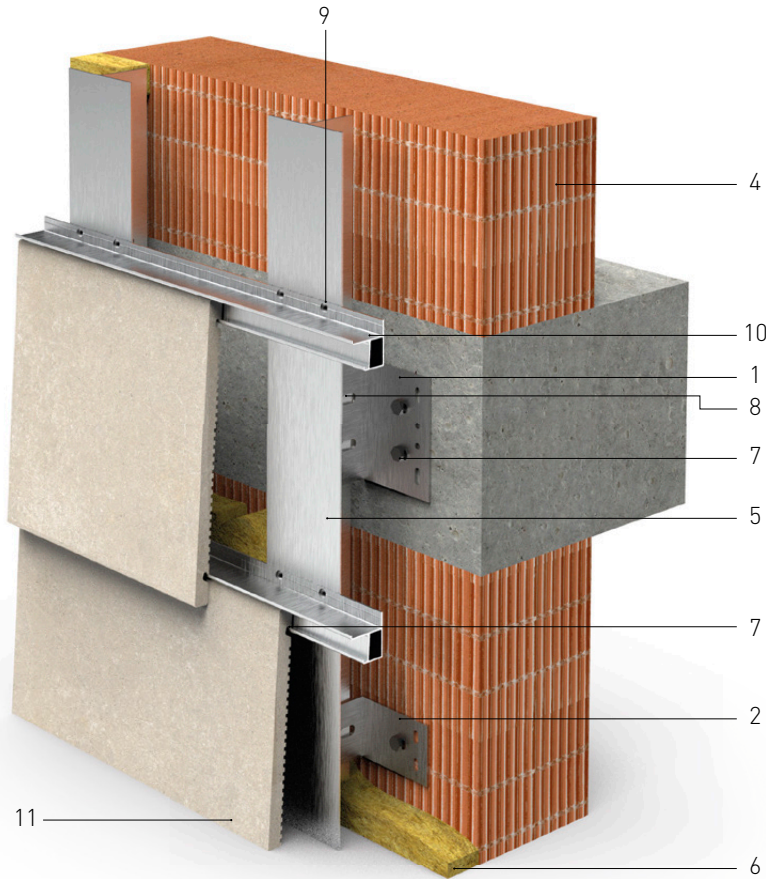


VERTICAL SECTION

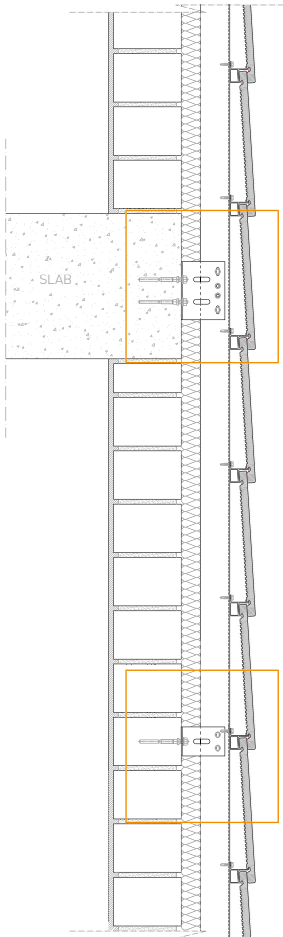


DET.1

DET.2


HORIZONTAL SECTION

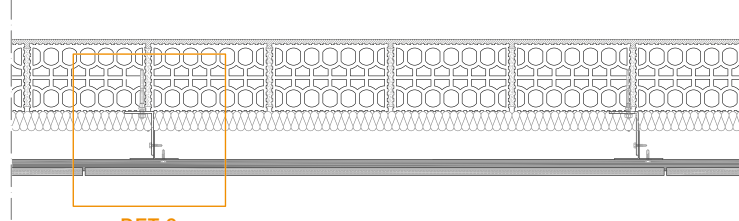


DET.3

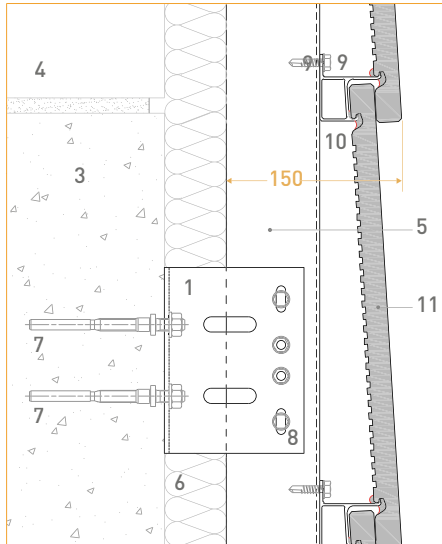

1. Support bracket

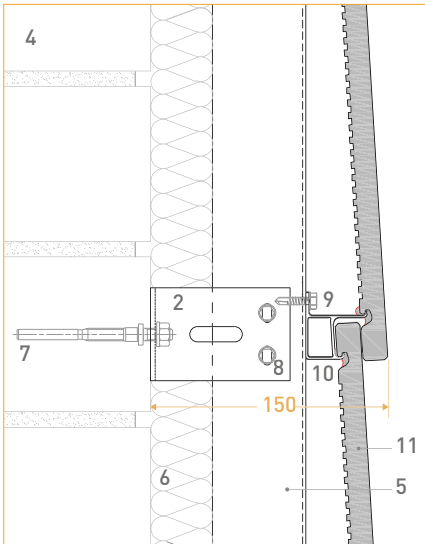

2. Stop bracket

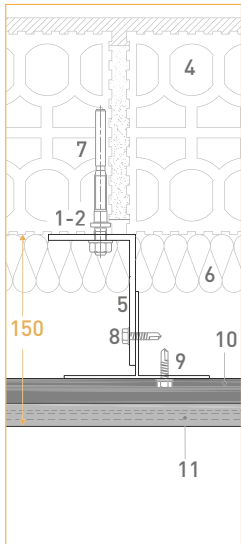

3. Horizontal detail


HORIZONTAL SYSTEM

- 1. Support Bracket
- 2. Stop Bracket
- 3. Slab
- 4. Wall
- 5. Vertical Aluminum Profile (PFC)
- 6. Insulation
- 7. Plastic Anchor
- 8. Autoscrew N12 5,5x25 With Washer
- 9. Autoscrew N12 5,5x22 Without Washer
- 10. Horizontal Aluminum Profile (PFF)
- 11. Faveton Ceramic Tile


APPLICABLE TILES



ELAR ROOF

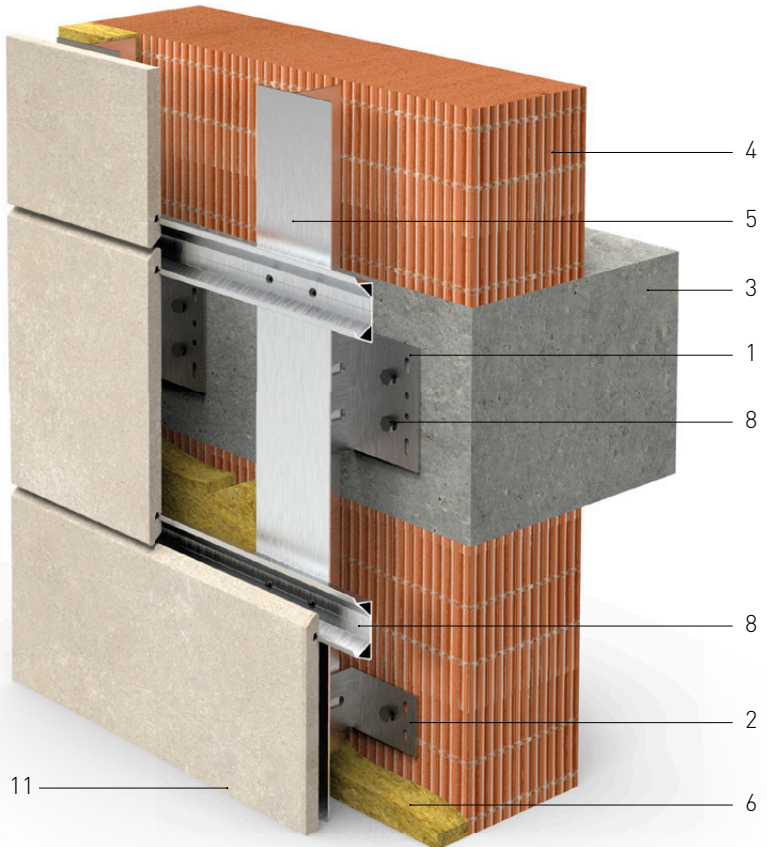


VERTICAL SECTION

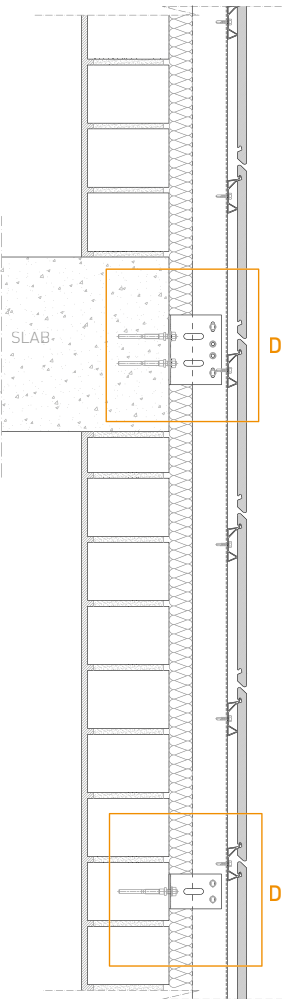


DET.1

DET.2


HORIZONTAL SECTION

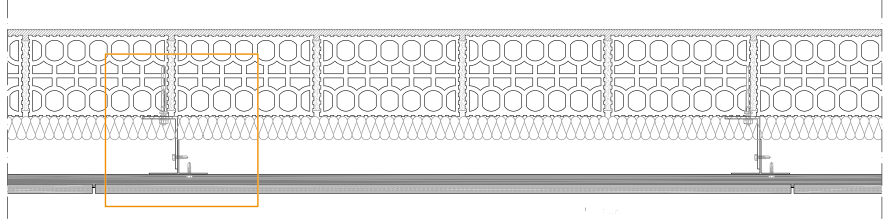


DET.3

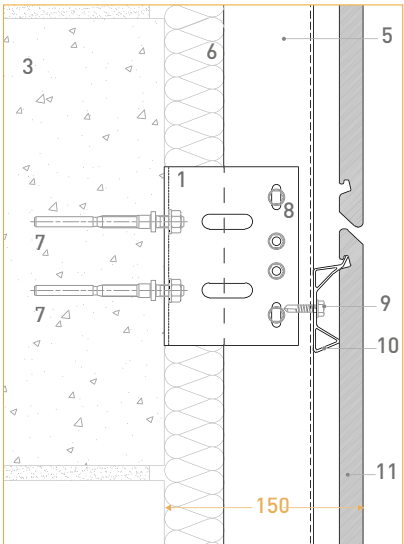


1. Support bracket

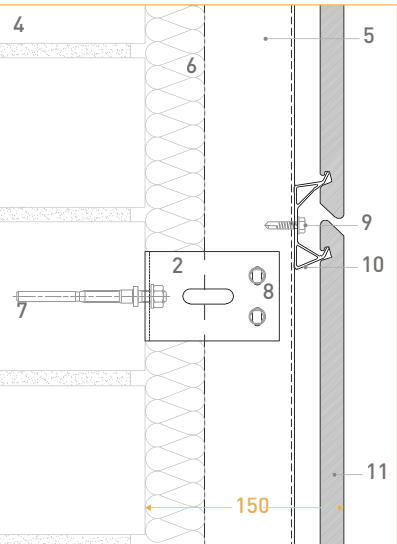


2. Stop bracket

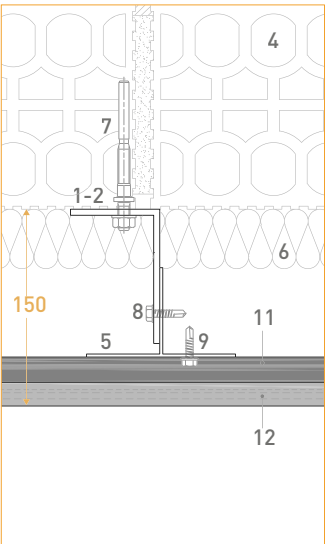

3. Horizontal detail

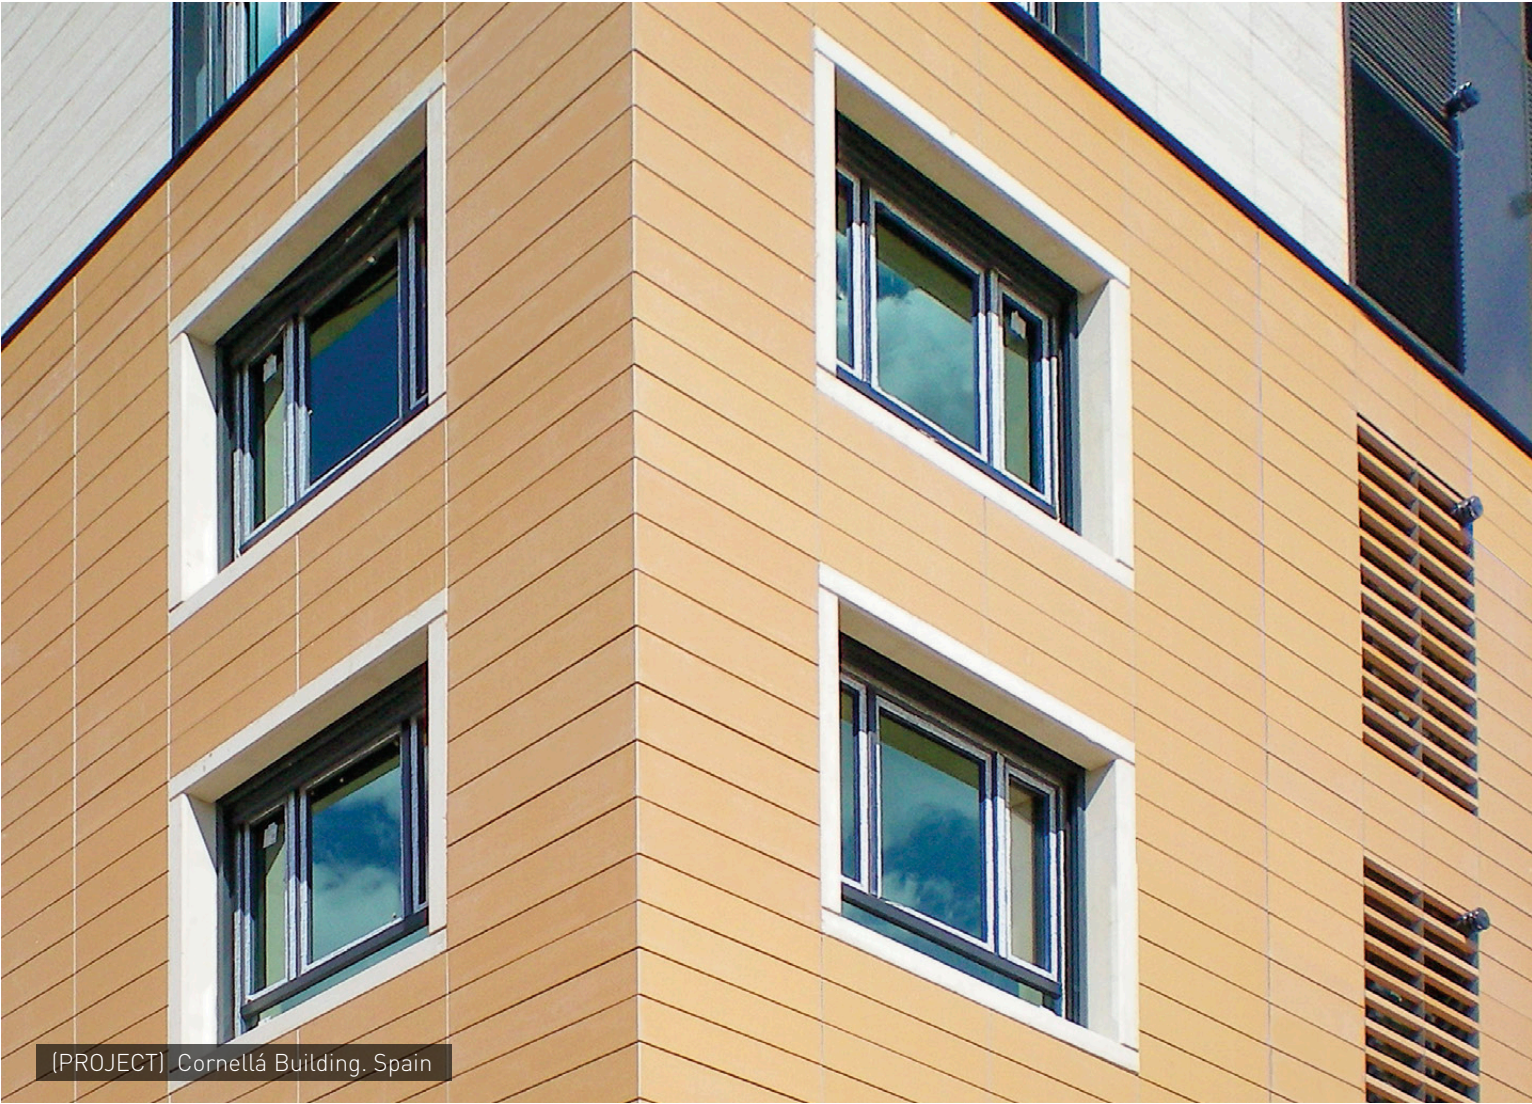

CORNERS

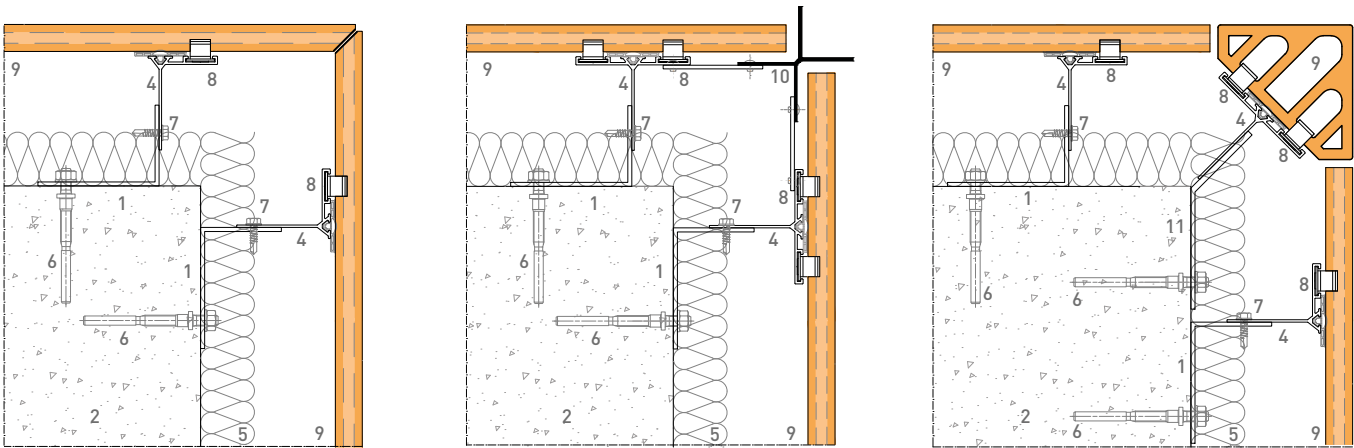


CERAMIC MITERED

CROSS PROFILE

CORNER TILE


COPING

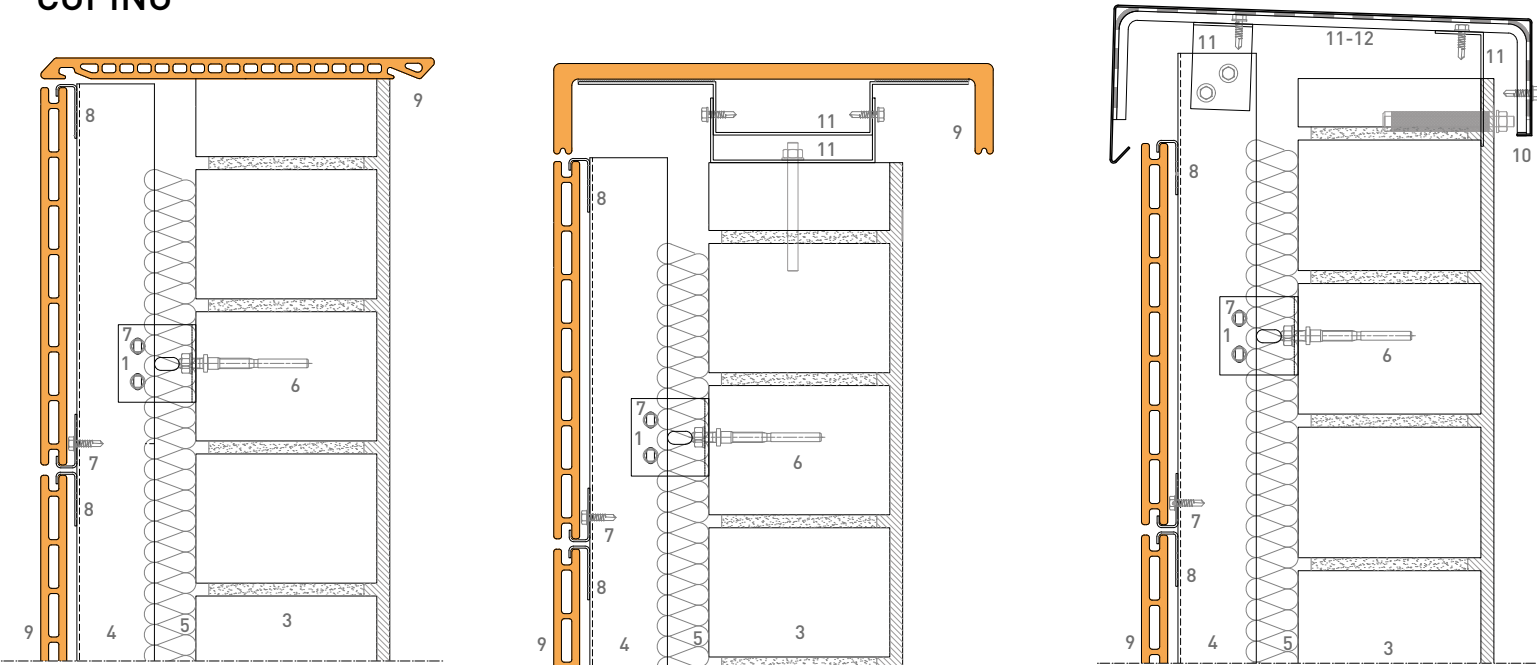

CERAM TILE


COPING - monoblock

METALLIC COPING

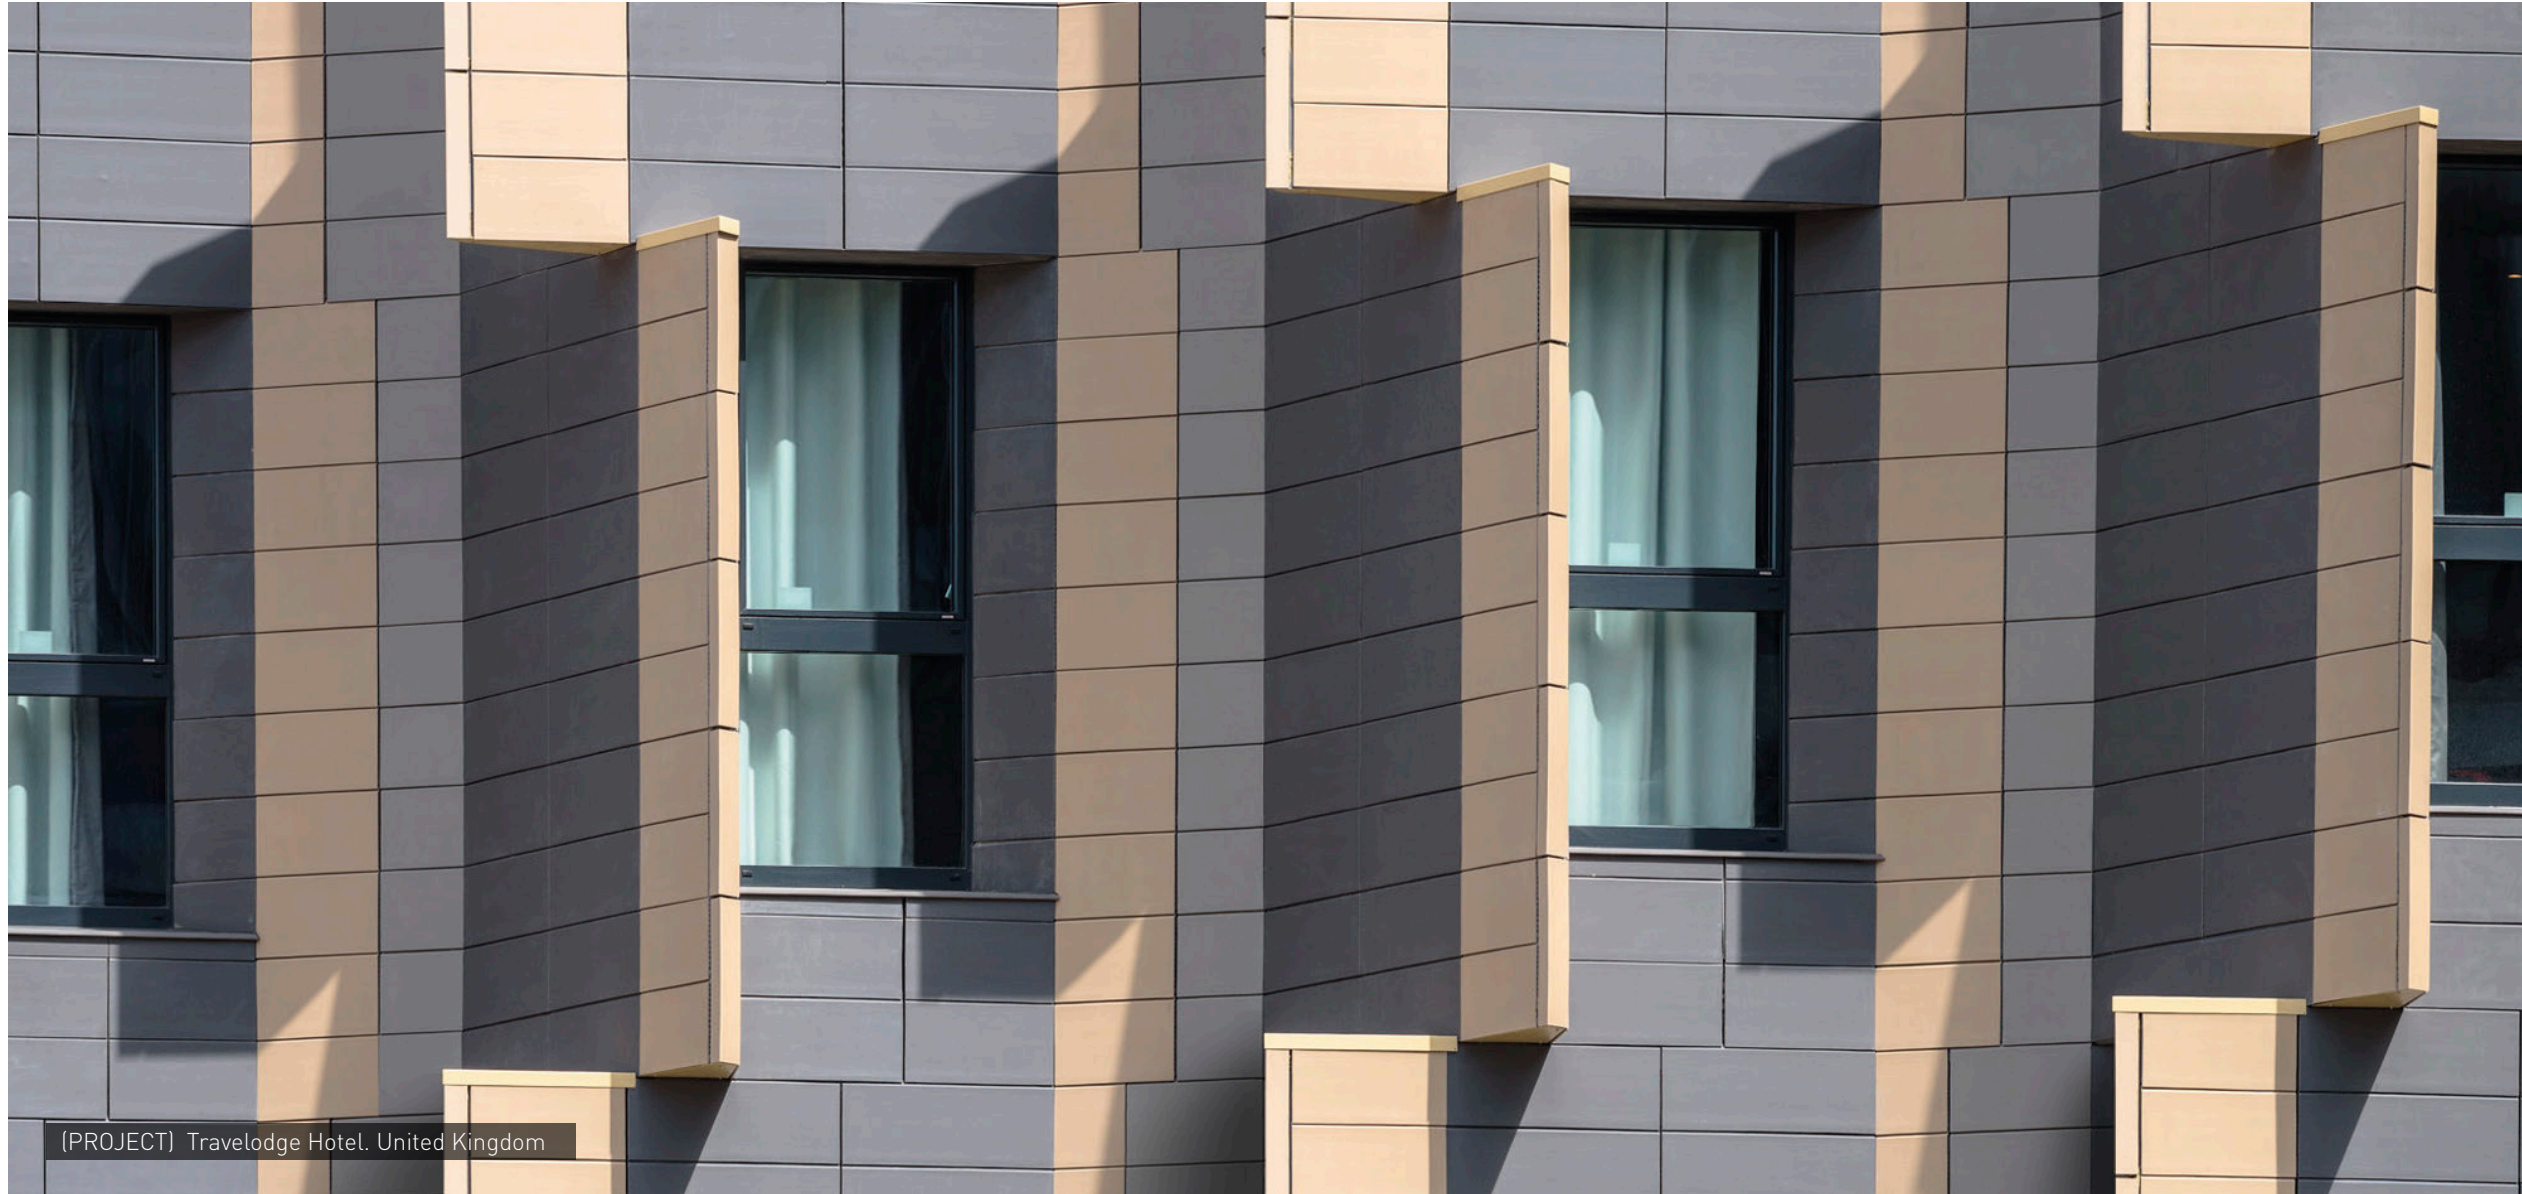


(PROJECT) Travelodge Hotel. United Kingdom

JAMBS

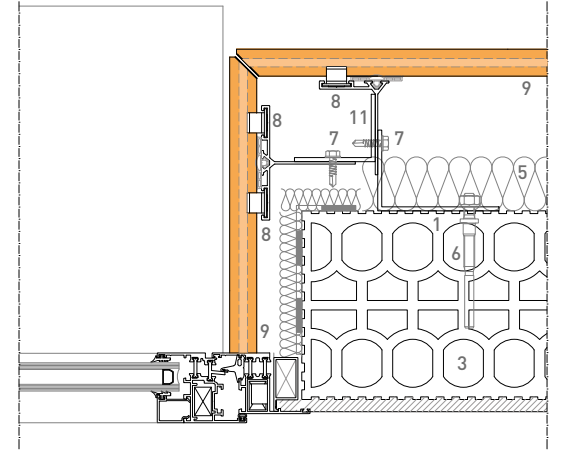


CERAMIC MITERED

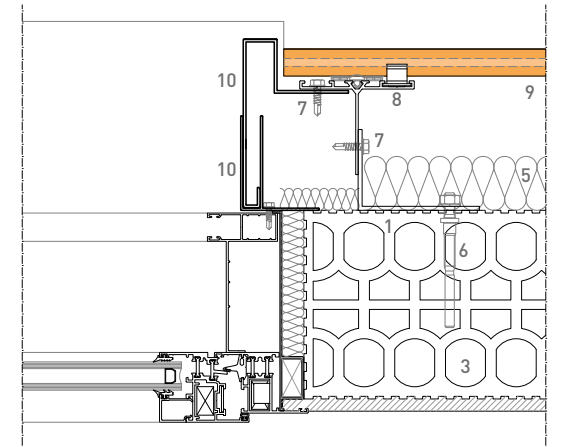


METALLIC JAMB

LINTELS

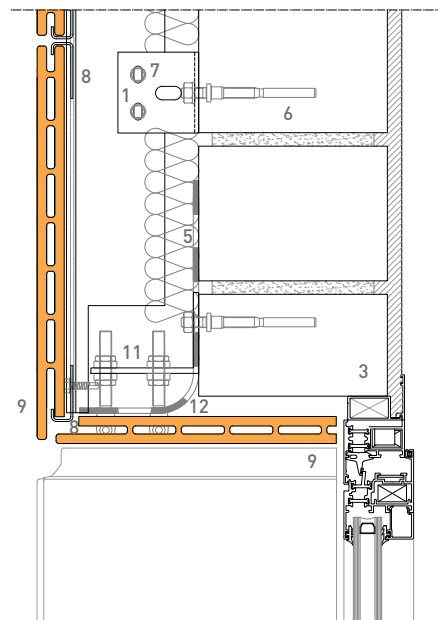


CERAMIC TILE

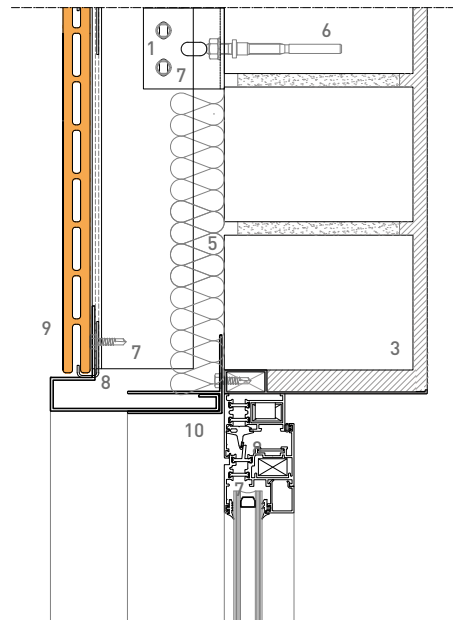


METALLIC LINTEL

1. Bracket
2. Slab
3. Wall
4. Vertical Aluminum Profile (PFC)
5. Insulation
6. Autoscrew N12 5,5x25 with washer
7. Autoscrew N12 5,5x22 without washer
8. CLIP 15 mm
9. FAVETON Ceramic Tile
10. Metallic Part
11. Metallic supplement
12. EPDM


WATER-POURING

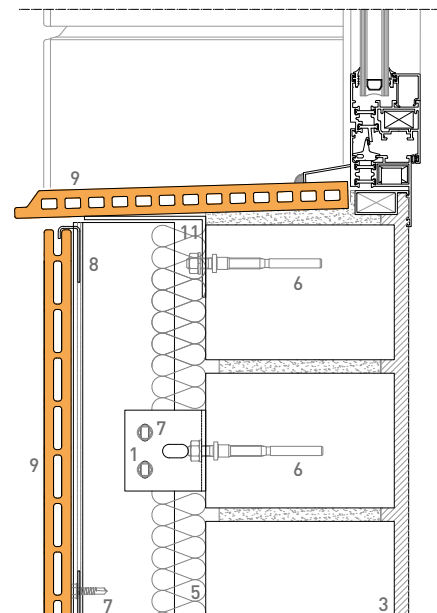

CERAM TILE

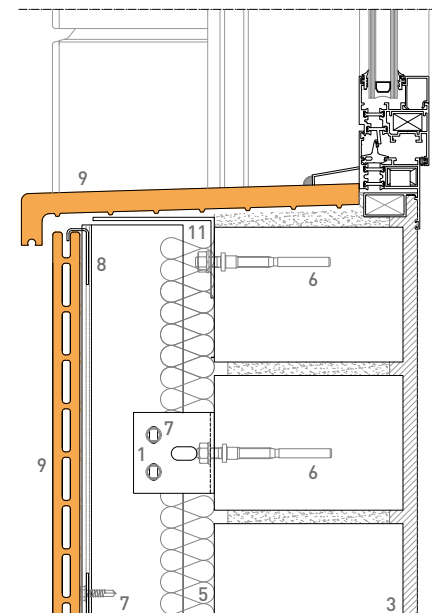

SILL - monoblock

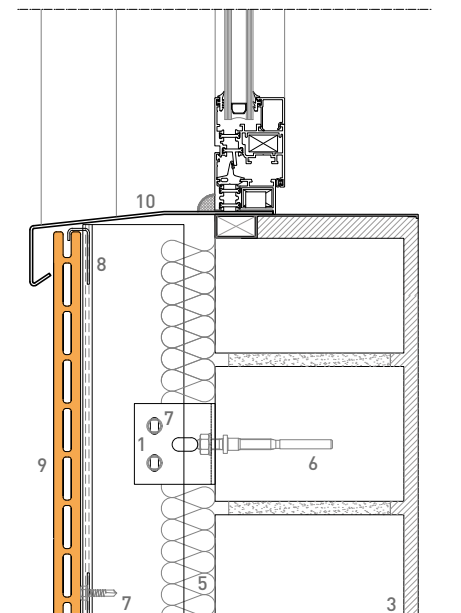

METALLIC SILL



[PROJECT] Oficinas Larrea-Orona. Spain




PLATES LOUVER SYSTEM




HORIZONTAL VERTICAL SYSTEM


1. Support Bracket
2. Stop Bracket
3. Wall
4. Vertical Aluminum "L" Profile (PFH)
5. Vertical Aluminum Profile (Louvers)
6. Plastic Anchor
7. Horizontal Aluminum Profile
8. Aluminum Plate
9. Autoscrew N12 5,5x25 With Washer
10. Autoscrew N12 5,5x22 Without Washer
11. Clip 15 mm
12. Faveton Ceramic Tile
13. Faveton Ceramic Louver

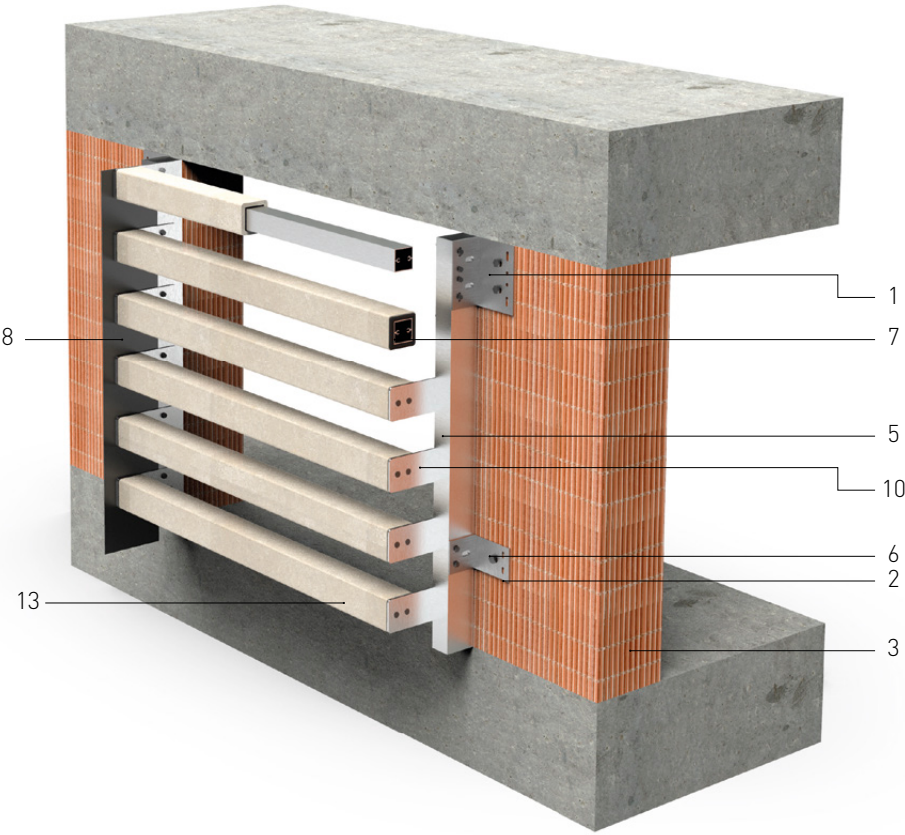


VERTICAL SECTION

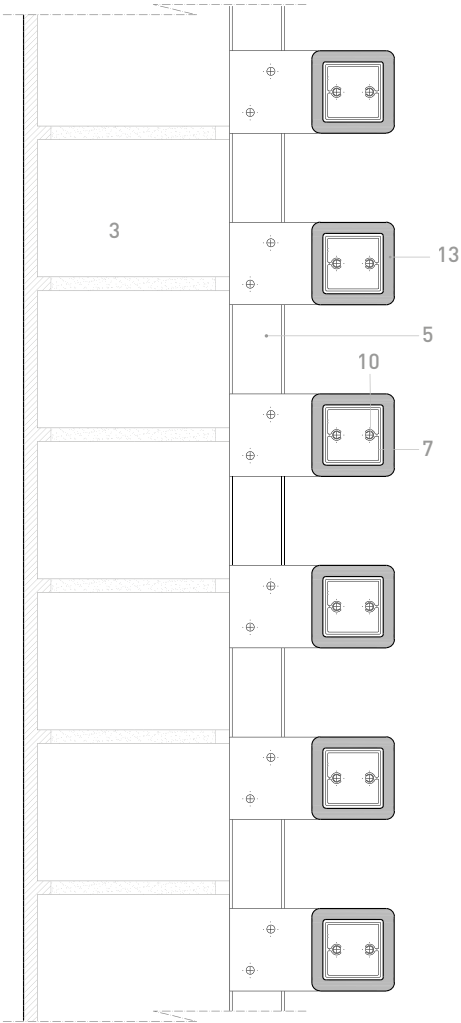

ELEVATION

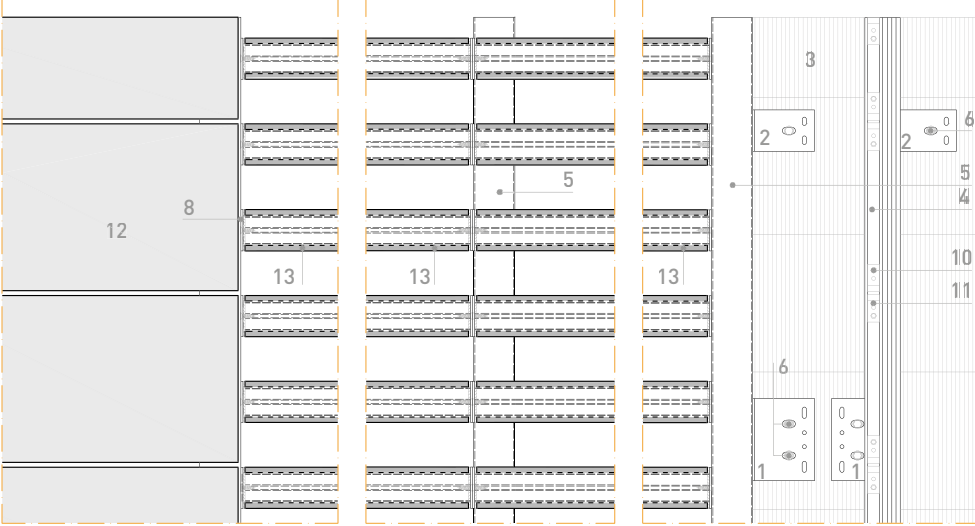

HORIZONTAL SECTION

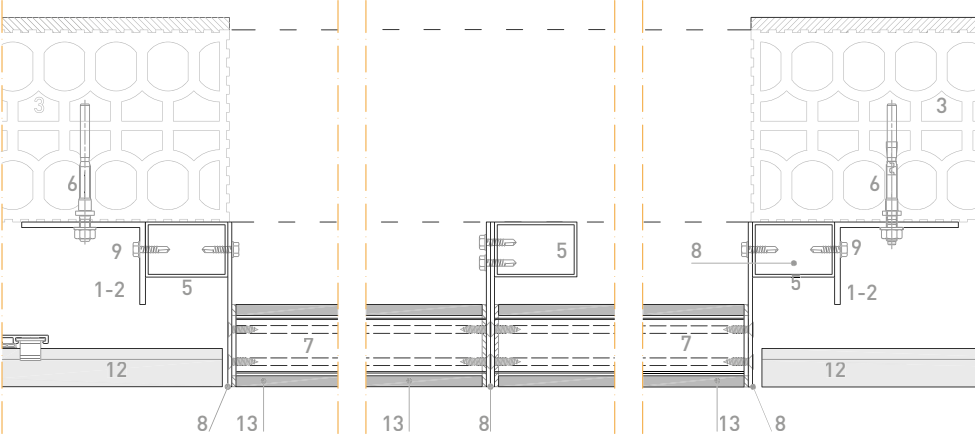





PRESTESSED SYSTEM

HORIZONTAL VERTICAL SYSTEM


- 1. Support Bracket
- 2. Stop Bracket
- 3. Wall
- 4. Vertical Aluminum "L" Profile (Pfh)
- 5. Vertical Aluminum Profile (Louvers)
- 6. Plastic Anchor
- 7. Metallic Horizontal Profile
- 8. Aluminum Plate
- 9. Autoscrew N12 5,5x25 With Washer
- 10. Autoscrew N12 5,5x22 Without Washer
- 11. Clip 15 Mm
- 12. Faveton Ceramic Tile
- 13. Faveton Ceramic Louver
- 14. Threaded Rod
- 15. Metallic Omega Plate E: 2mm
- 16. Epdm

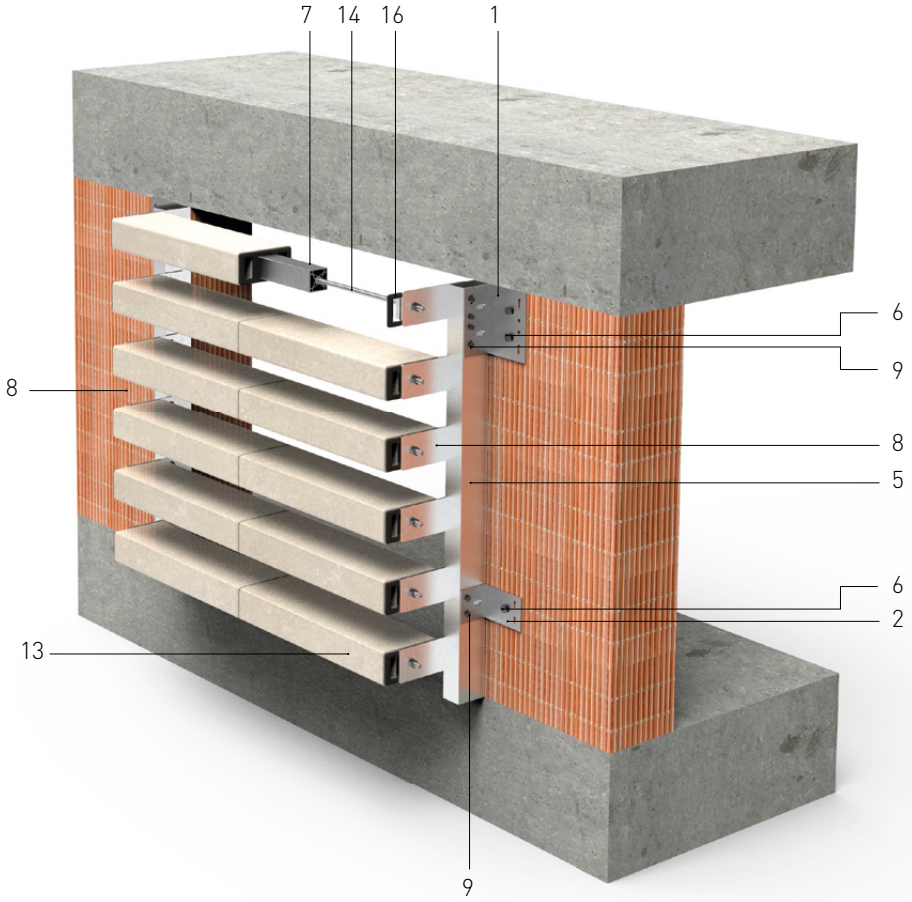


VERTICAL SECTION

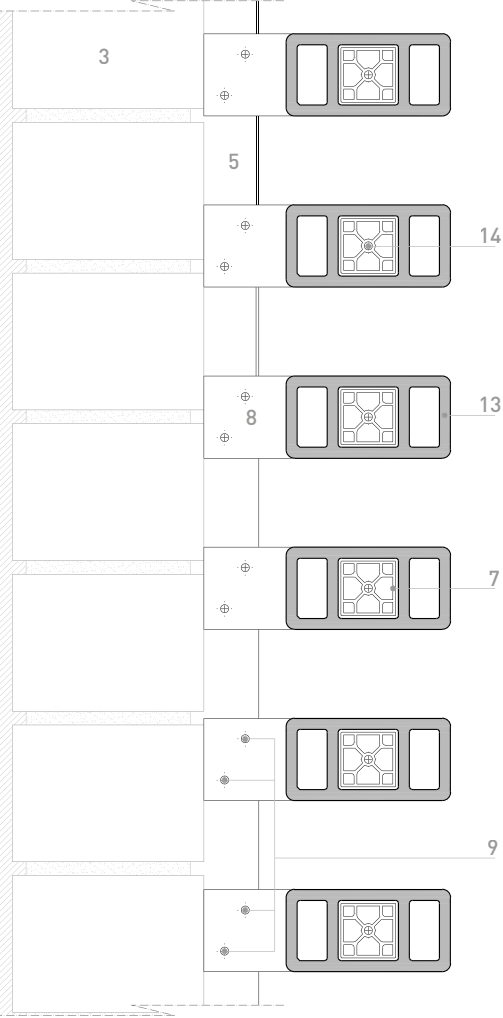

ELEVATION

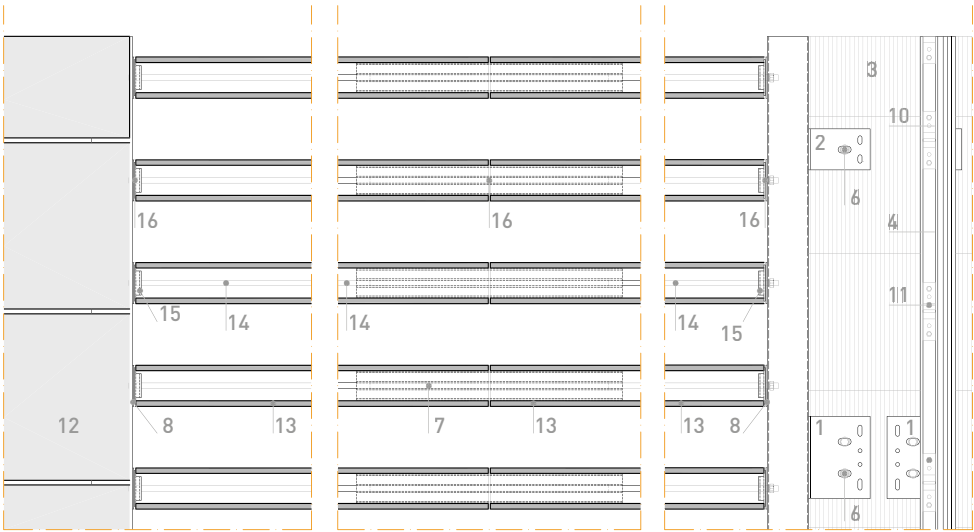


HORIZONTAL SECTION

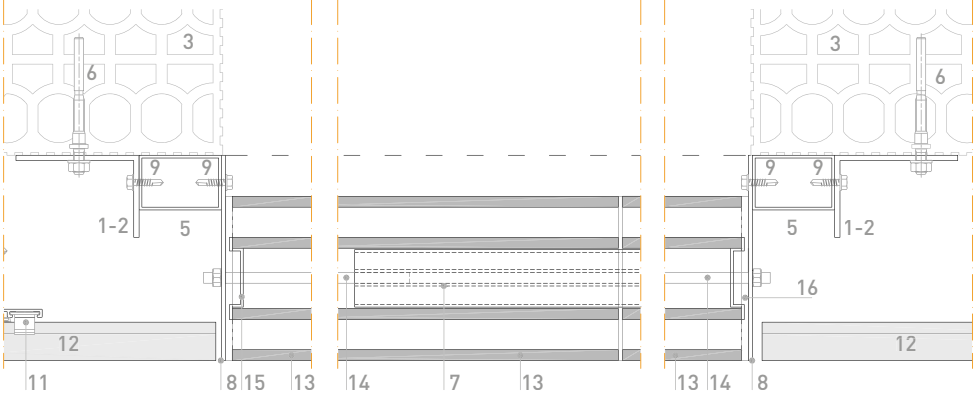


DRILLED LOUVER SYSTEM

HORIZONTAL VERTICAL SYSTEM


- 1. Support Bracket
- 2. Stop Bracket
- 3. Wall
- 4. Vertical Aluminum "L" Profile (PFH)
- 5. Vertical Aluminum Profile (Louvers)
- 6. Plastic Anchor
- 7. Horizontal Steel Profile
- 8. Screw M6 + Flush Nut Mm-Wn M6
- 9. Autoscrew N12 5,5x25 With Washer
- 10. Autoscrew N12 5,5x22 Without Washer
- 11. Clip 15 mm
- 12. Faveton Ceramic Tile
- 13. Faveton Ceramic Louver

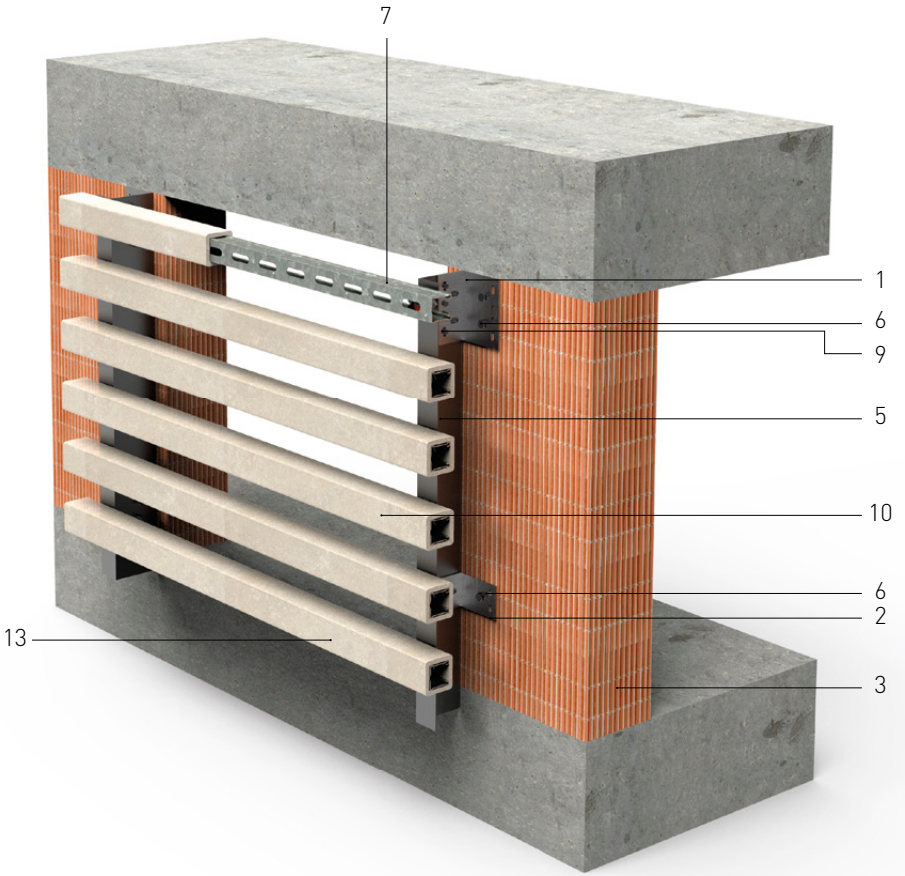


VERTICAL SECTION

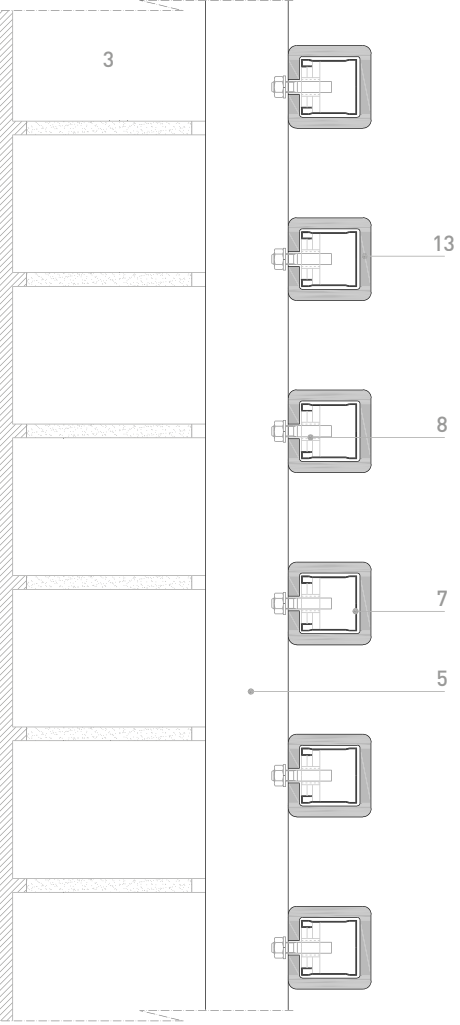

ELEVATION

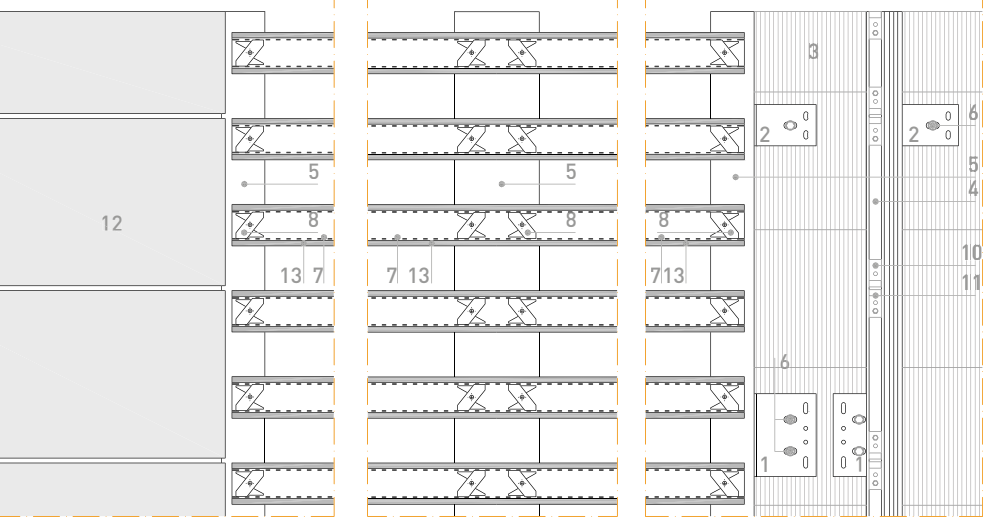


HORIZONTAL SECTION

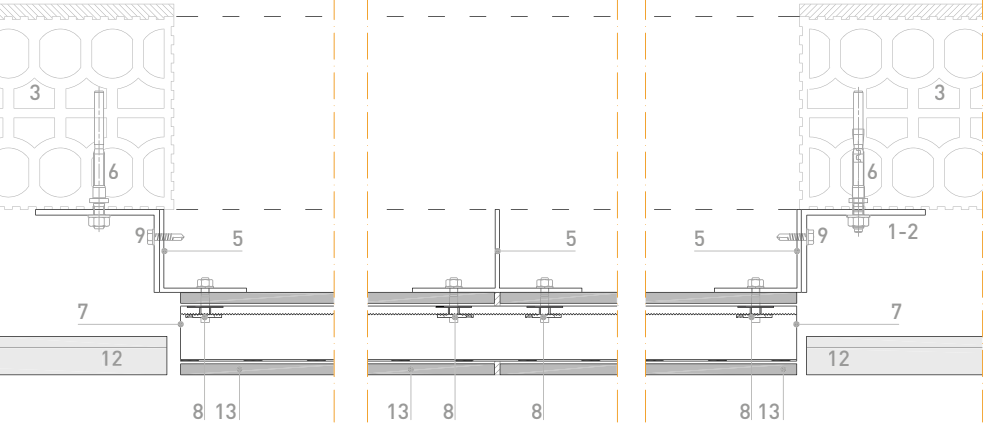




HORIZONTAL
VERTICAL
SYSTEM

- 1. Support Bracket 01
- 2. Support Bracket 02
- 3. Louver 01 _ Spheric Ø 60
- 4. Louver 02 _ Briol 50x50
- 5. Vertical Aluminum Profile 30x30
- 6. Plastic Anchor
- 7. Metallic Frame E:6mm
- 8. Epdm
- 9. Autoscrew N12 4.2x22 Without Washer
- 10.Screw M12 With Nut


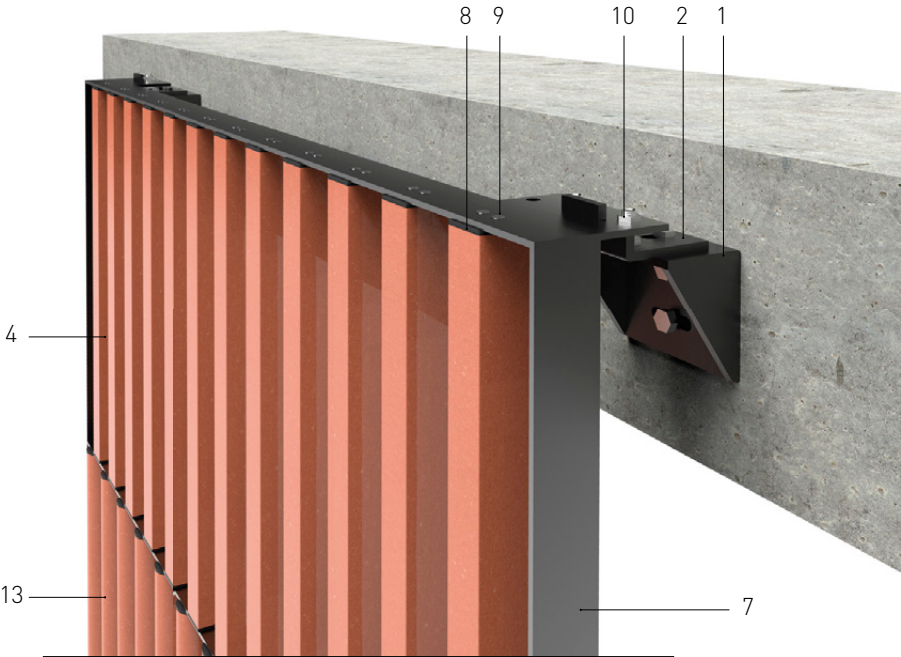


1. MODULE ANCHOR SYSTEM DETAIL

SECTIONS

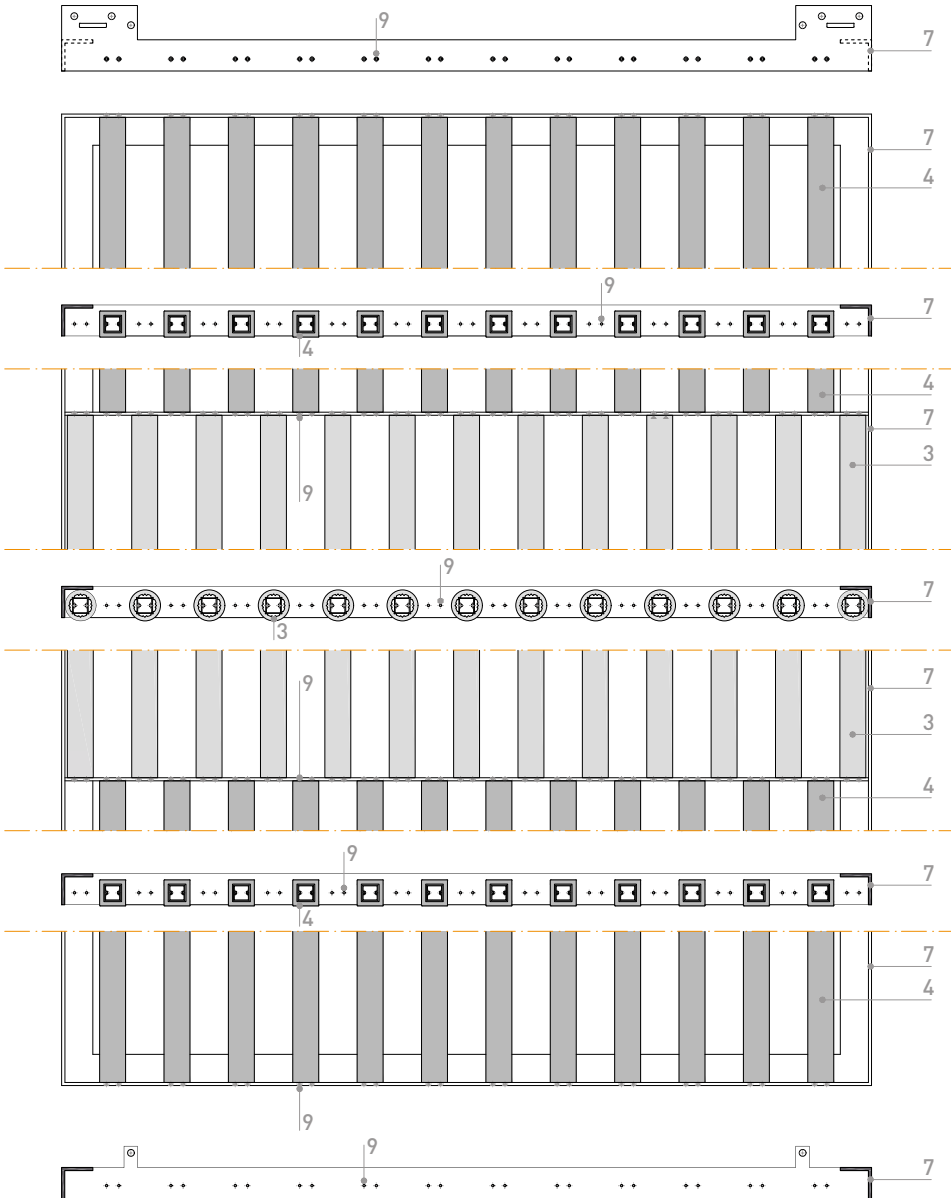


ELEVATION

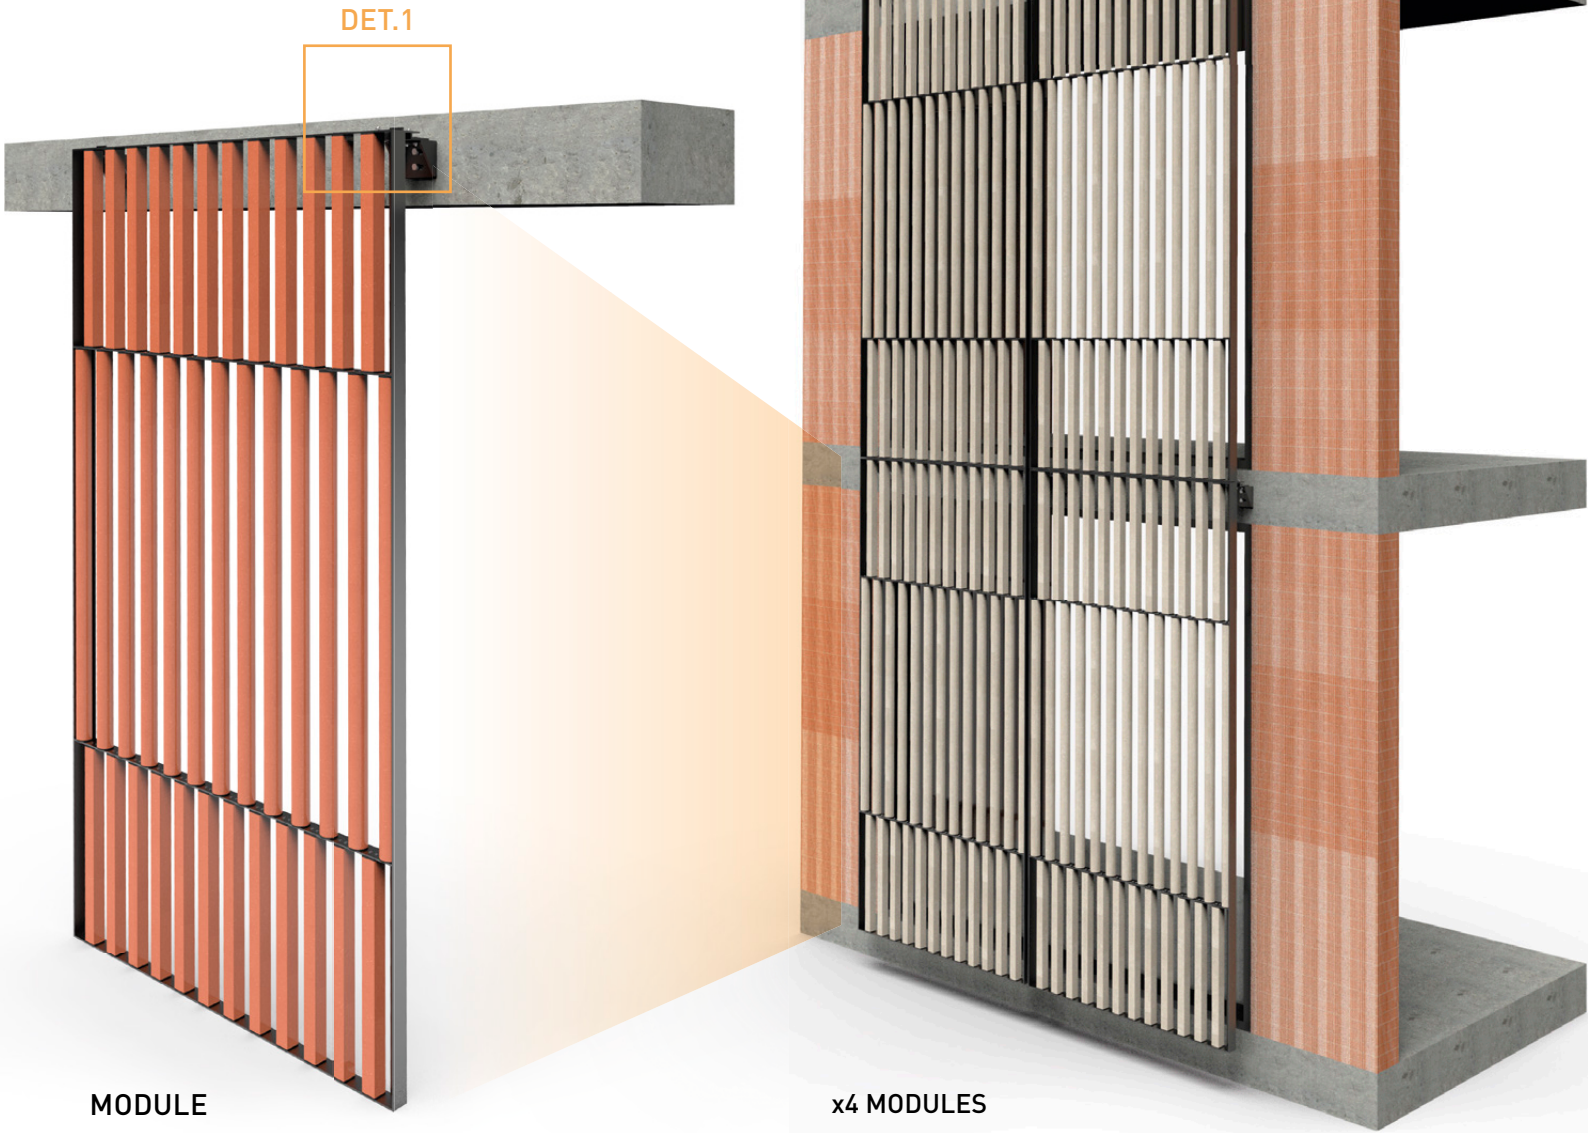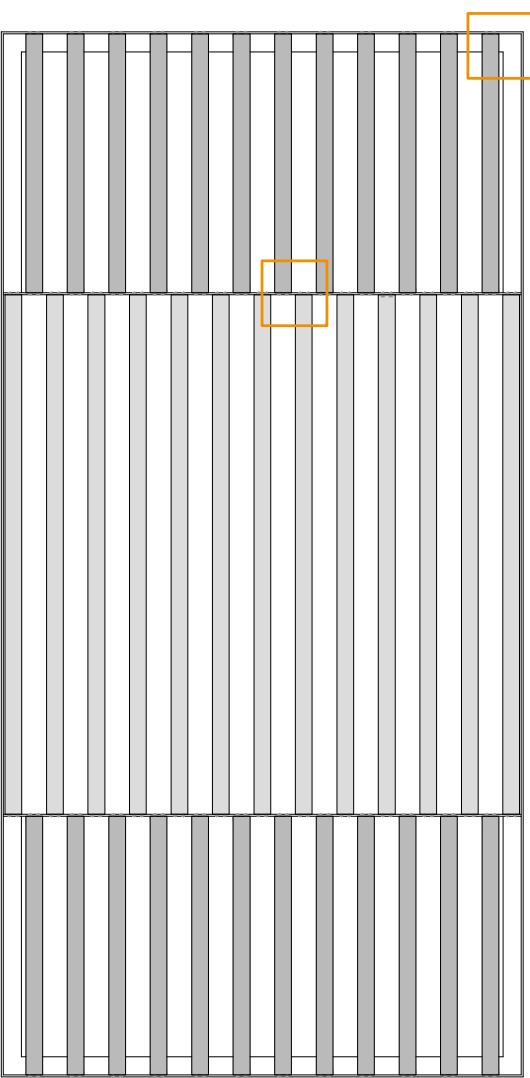


MODULE

x4 MODULES

1. MODULE ANCHOR SYSTEM

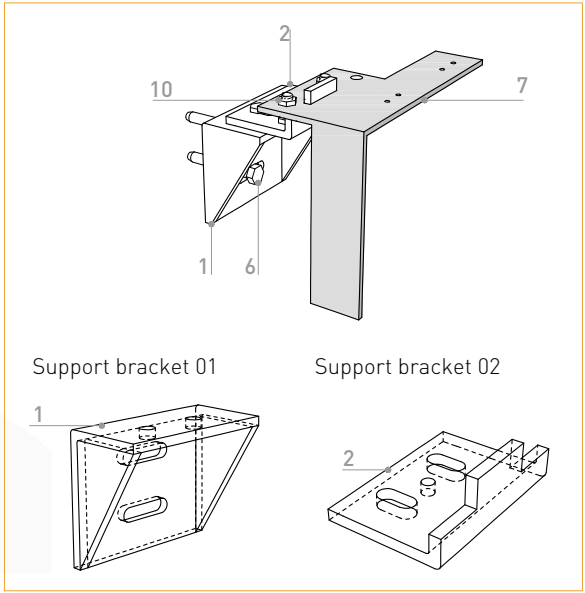

2. LOUVERS ANCHOR SYSTEM

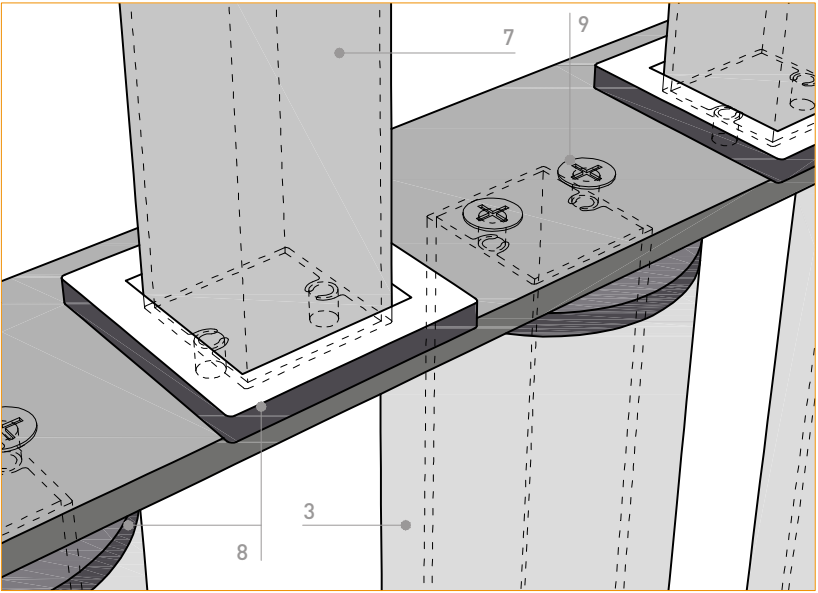



(PROJECT) Promenada De Sibiu Shopping Mall, Rumania



STEEL SHEET BT-21 BRICK TILE SYSTEM

TECHNOLOGY




HORIZONTAL SYSTEM

- 1. Aluminum Bracket
- 2. Plastic Anchor
- 3. Autoscrew N12 5.5mm
- 4. Insulation
- 5. Galvanized Steel Sheet
- 6. Pan Head Screw
- 7. Fastening Mastic
- 8. Faveton Brick Tile E: 21mm
- 9. Aluminum Vertical Profile (PFC)


APPLICABLE TILES





BT-21

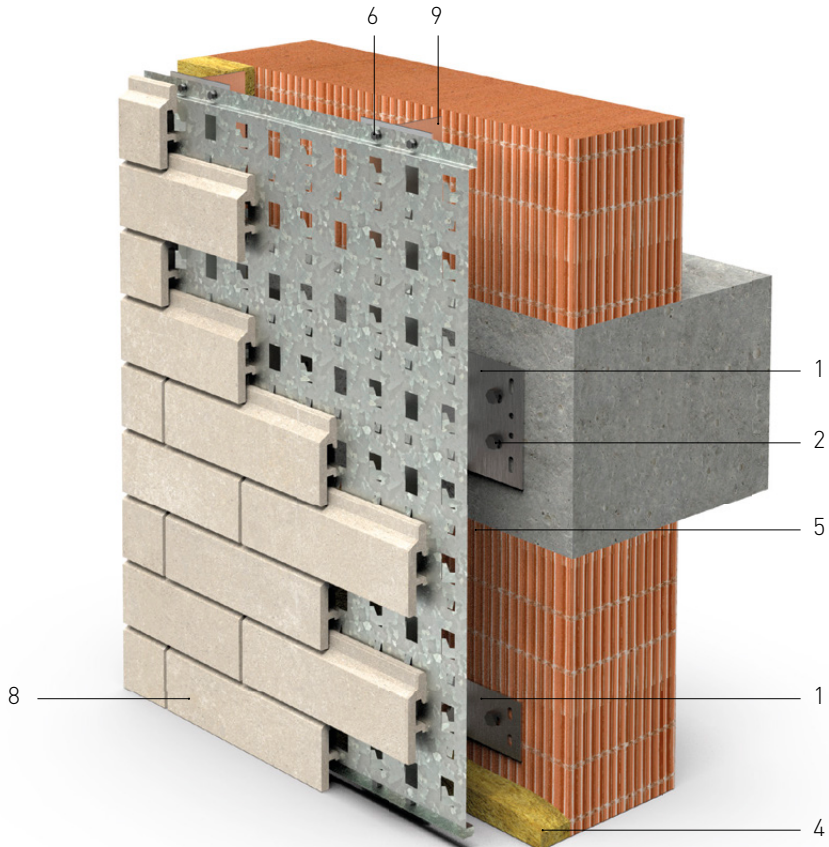


VERTICAL SECTION

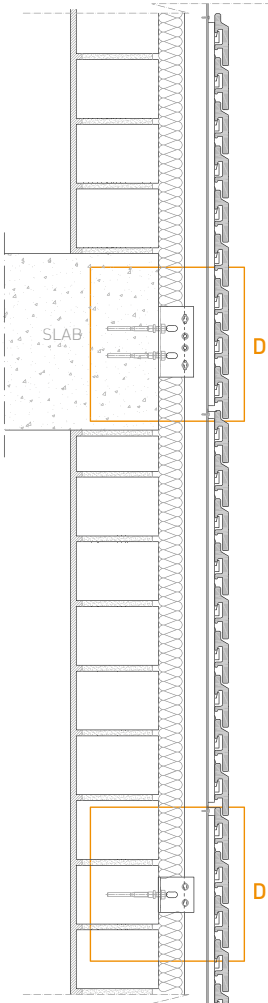


HORIZONTAL SECTION

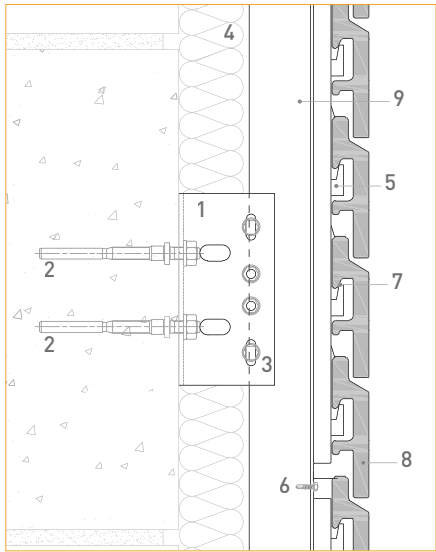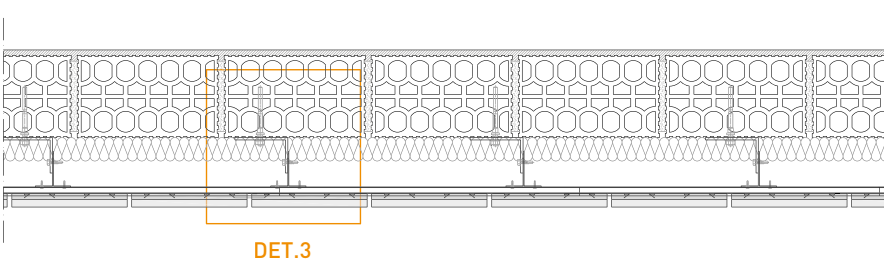

1. Support bracket

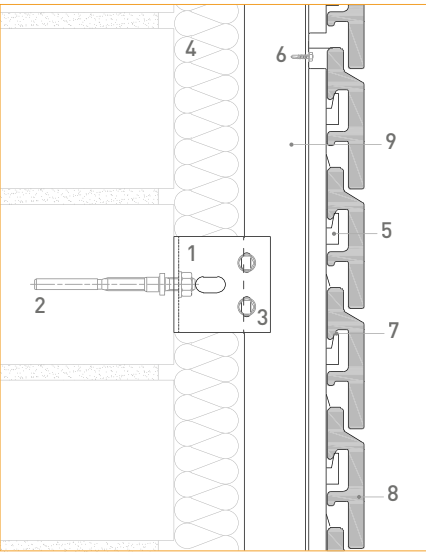

2. Stop bracket

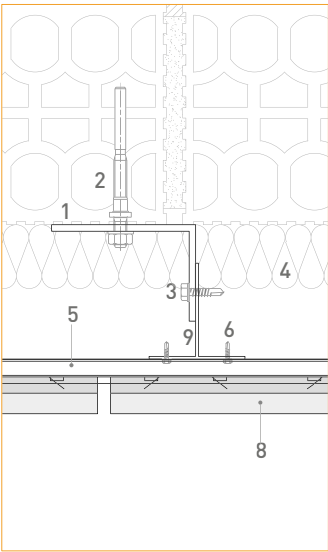

3. Horizontal detail


HORIZONTAL SYSTEM

- 1. Aluminum Bracket
- 2. Plastic Anchor
- 3. Autoscrew N12 5.5mm
- 4. Insulation
- 5. Aluminum Horizontal Profile (PFH)
- 6. Pan Head Screw
- 7. Fastening Mastic
- 8. Faveton Brick Tile E: 21mm
- 9. Aluminum Vertical Profile (PFC)


APPLICABLE TILES



BT-21

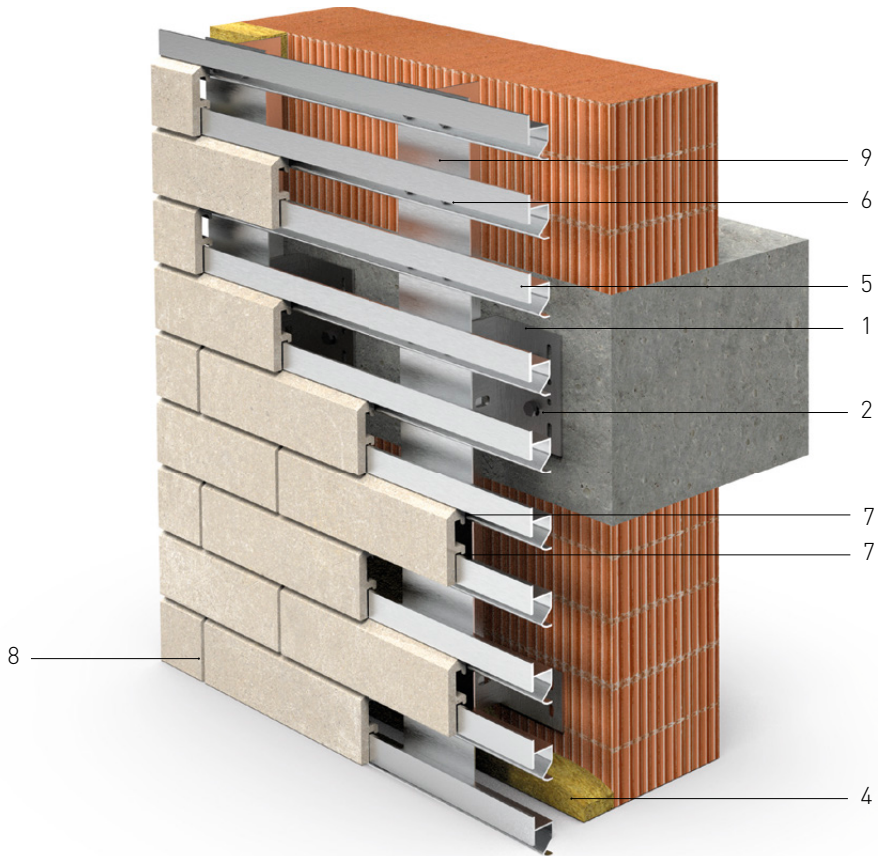


VERTICAL SECTION

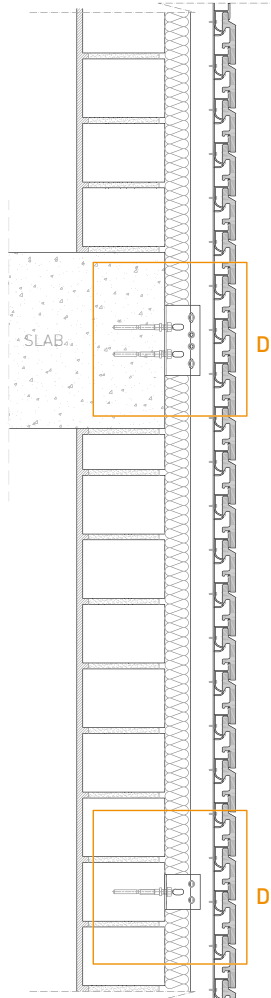


DET.1

DET.2


HORIZONTAL SECTION

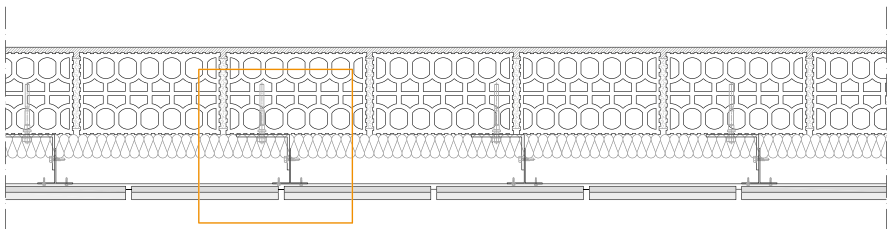


DET.3

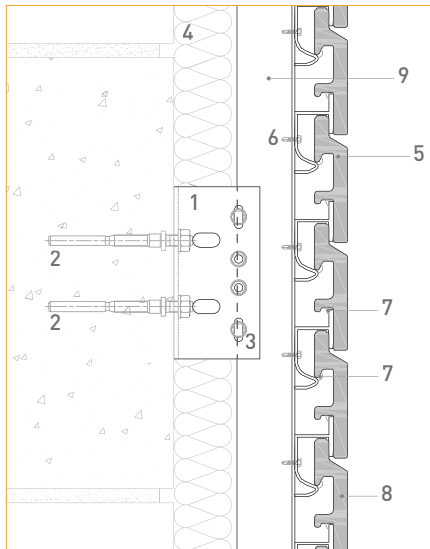

1. Support bracket

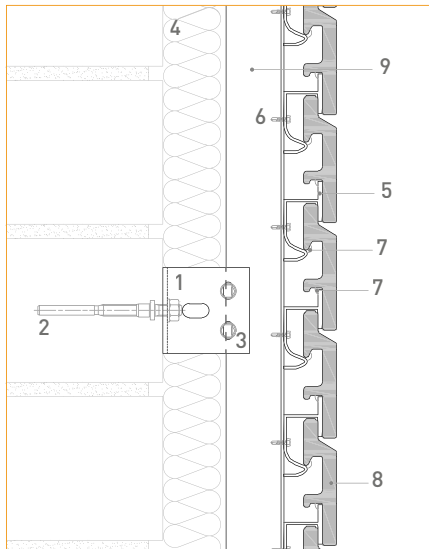

2. Stop bracket

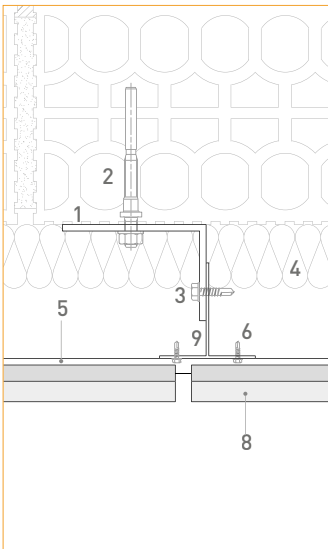

3. Horizontal detail




HORIZONTAL SYSTEM

- 1. Support - Stop Bracket
- 2. Stainless Steel Anchorage
- 3. Autoscrew N12 5.5mm
- 4. Insulation
- 5. Aluminum Horizontal Profile
- 6. Pan Head Screw
- 7. Fastening Mastic
- 8. Faveton Brick Tile
- 9. Aluminum Vertical Profile
- 10. Mechanical Anchorage


APPLICABLE TILES



BT-14

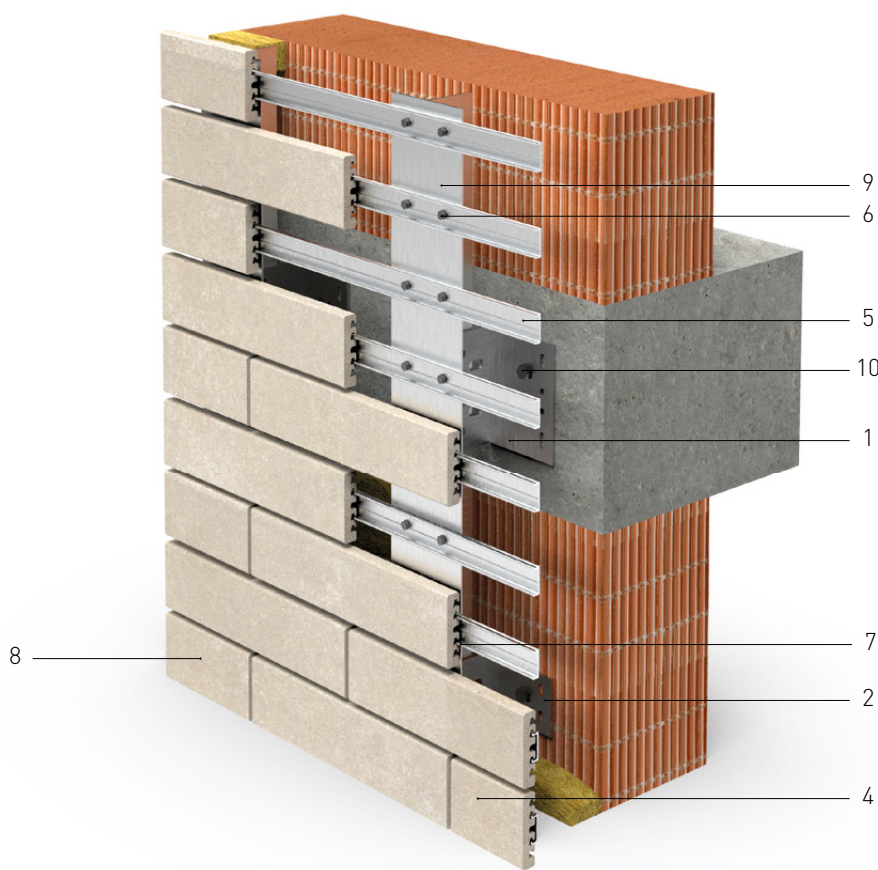


VERTICAL SECTION

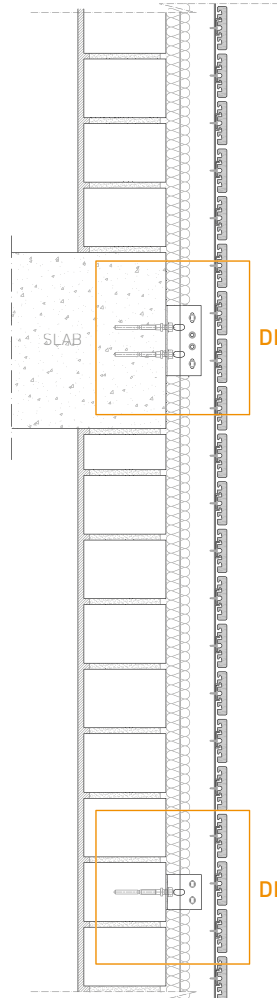


DET.1

DET.2


HORIZONTAL SECTION

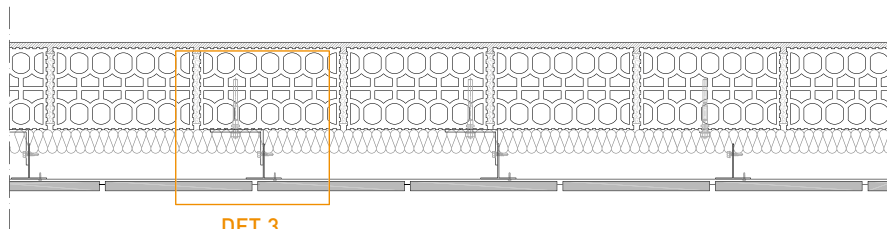


DET.3

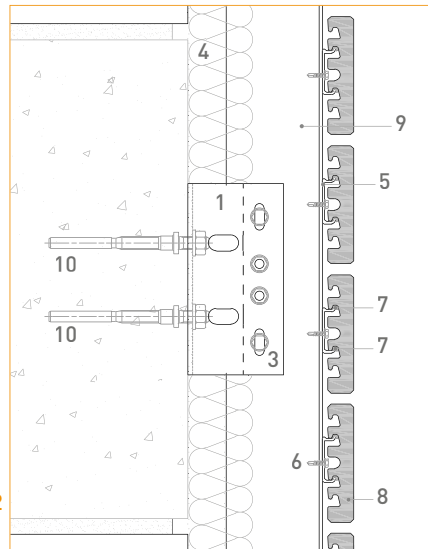

1. Support bracket

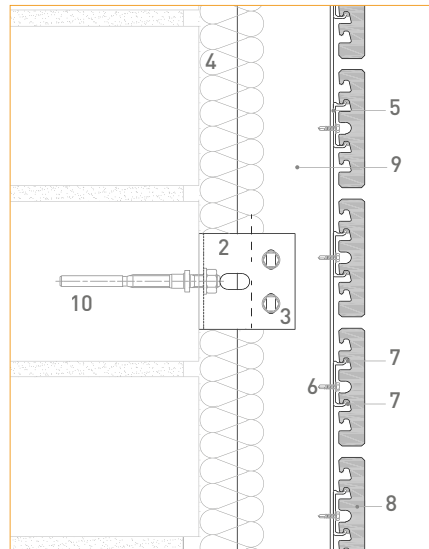

2. Stop bracket


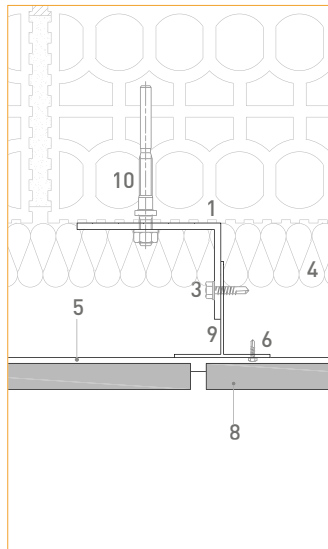


3. Horizontal detail




- 1. Mortal coating
- 2. Brick tile BT-10
- 3. Slab
- 4. Wall


APPLICABLE TILES

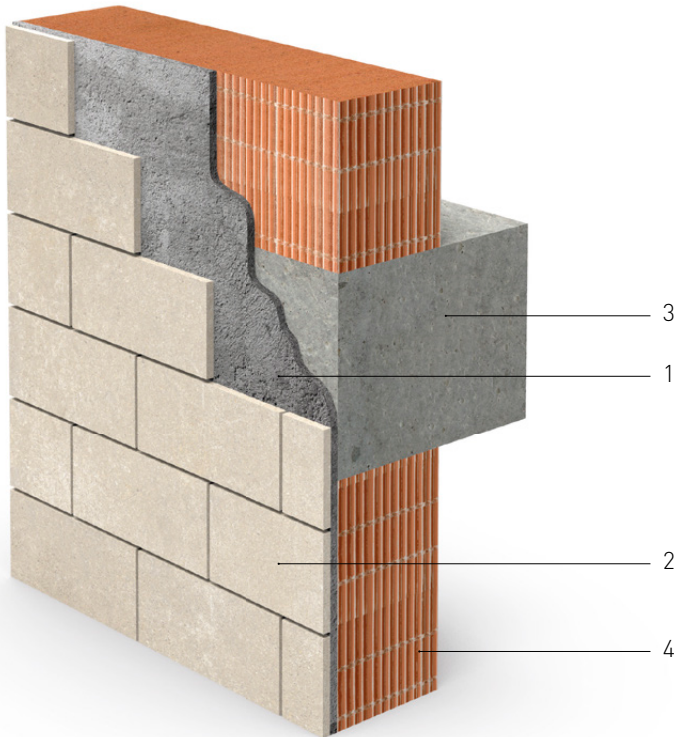



LAYING SUGGESTIONS

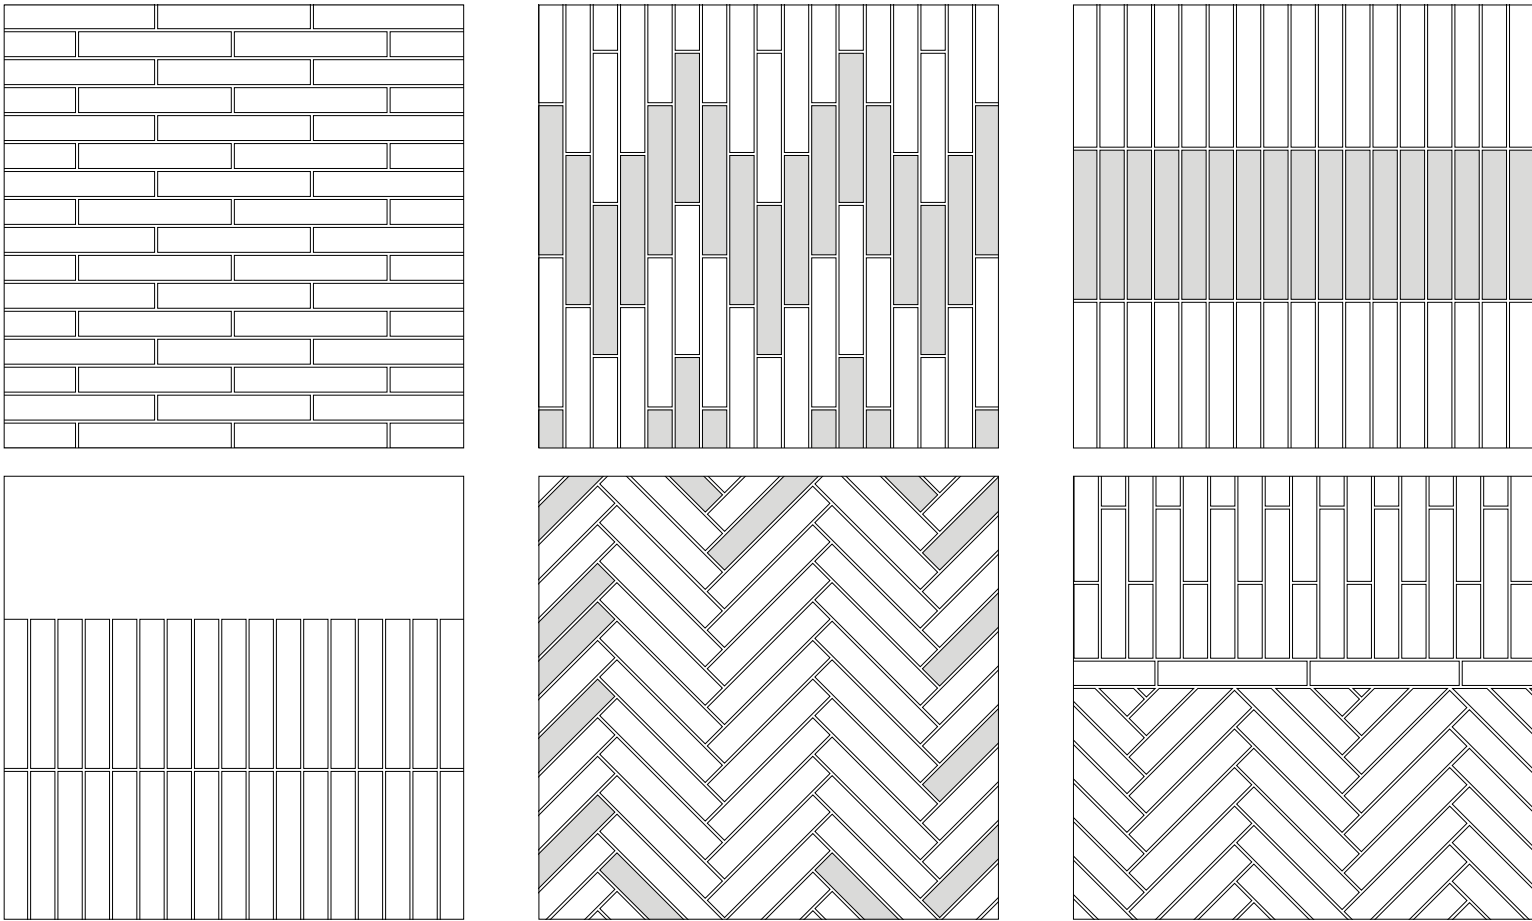


VERTICAL SECTION

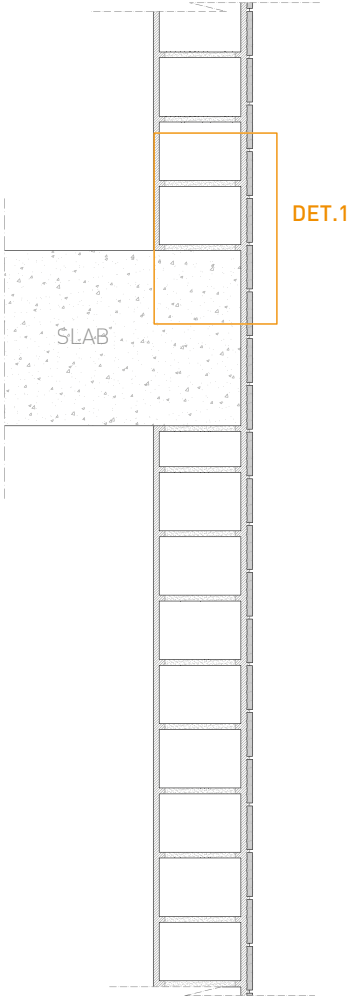

HORIZONTAL SECTION

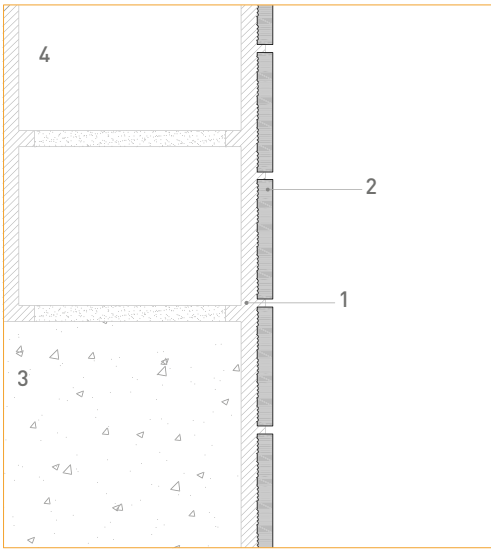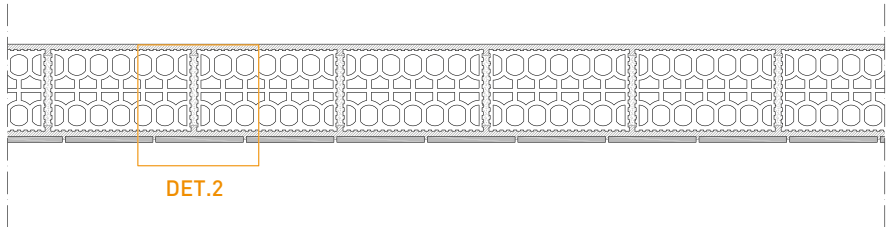

1. Vertical detail

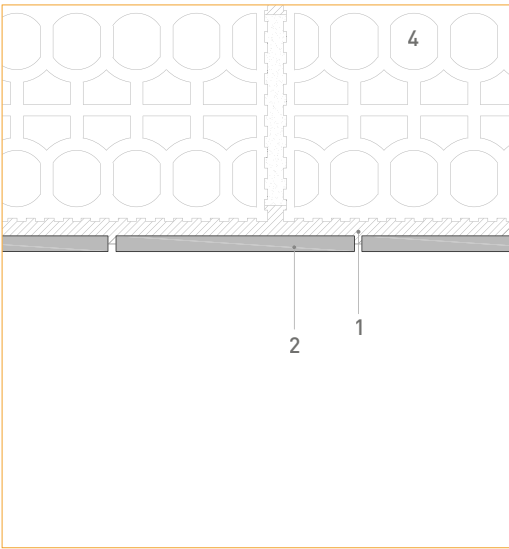

2. Horizontal detail



VENTILATED FAÇADE

WALL CLADDING

LOUVERS

SOLUTIONS

Create with us!

CERAM 20

Standard heights:
200-250-300-400-500mm
Maximum length: 1500mm
Weight: 32 kgs / m2
Thickness: 20mm
Standard joints:
10mm horizontal and vertical
Anchorage:
horizontal and vertical



CERAM 28

Standard heights:
200-250-300-350-400-450
500-600mm
Maximum length: 1500mm
Weight: 45 Kg / m2
Thickness: 28mm
Standard joints:
8mm horizontal and vertical
Anchorage:
horizontal and vertical



ACQUA

Standard heights:
200-300-400-500-600mm
Maximum length: 1500mm
Weight: 32 kgs/m2
Thickness: 20mm
Standard joints:
4mm horizontal and vertical
Anchorage:
horizontal and vertical



ELAR

Customized designed substructure
Height: up to 400mm
Maximum length: 1200mm
Weight: 30 kgs/m2
Thickness: 16mm




BRICK TILE

Length: up to 300 mm.
(between axes)
Variable joints according to system

BT10 - 150x10
Anchorage: multiple solutions
Glued

BT14 - 74x14
Ventilated system
Sandwich panel
Anchorage: horizontal

BT21 - 90x21
Ventilated system
Sandwich panel
Anchorage: horizontal




LOUVERS

Maximum length: 1500 mm

Anchorage:
horizontal and vertical

Customized design substructure
Pivoting system
Modular system



SOLUTIONS

Maximum length: 1500 mm

Anchorage:
horizontal and vertical

Customized design substructure
Monoblock pieces
Cut corners and curves



DESIGNS

Standard heights:
200-250-300-350-400-450
500-600mm
Maximum length: 1500mm

Body coloured
Glazed finishes
Raw surfaces
Innova colours





VENTILATED FAÇADE				
SAH -SAV	SAC	SAC-0	SAO	SAF
AQUA CERAM	AQUA CERAM	AQUA CERAM	AQUA CERAM	AQUA horizontal and vertical CERAM horizontal ELAR horizontal
Anchorage system: SAH: horizontal SAV: vertical (AQUA) System possibilities Ventilated façade Ventilated façade insulation	Anchorage: horizontal System possibilities Ventilated façade Ventilated façade insulation	Anchorage: horizontal System possibilities Ventilated façade Ventilated façade insulation	Anchorage: horizontal System possibilities Ventilated façade Ventilated façade insulation	Anchorage: SAF-H: horizontal SAF-V: vertical (AQUA) System possibilities Ventilated façade Ventilated façade insulation

ELAR
Anchorage: horizontal
System possibilities: Ventilated façade | Ventilated façade insulation

FLAT

ROOF TILE

ROOF TILE: SAF

LOUVERS
Pivoting system | Modular system
Anchorage: horizontal and vertical

PERFORED

PLATENS

PRESTESSED

BRICK TILE
Anchorage: horizontal
System possibilities: Ventilated façade | Sandwich panel

BT-10: GLUED

BT-14 | BT-21: SAC

BT-21: STEEL SHEET

OUR COMMITMENT TO THE ENVIRONMENT



Environmental commitment in FAVETON:

We focus on meeting the environmental objectives through the support and participation of all those involved in their production and distribution operations.

We identify the direct and indirect environmental aspects of our activities and ensure appropriate controls to prevent pollution and emission regulation.

We try to reduce / minimize gas emissions from all our production process.

We minimize the consumption of energy, water and the generation of waste as much as possible.

The resources used in the production process are as much as possible obtained from recycled / renewable sources and are used efficiently.

We try to conserve and when possible to improve biodiversity in the area, working in partnership with organizations dedicated to improve the natural environment.

We establish objectives and goals annually with which we evaluate performance in relation to the objectives set.





Cra. Herrera de los navarros, Km 1,5.
50450 Muel - Zaragoza (España)
P (+34) 976 140 311
E info@faveton.com
W www.faveton.com

EDITION JANUARY 2022



FAVETON®

The publisher assumes no liability for typographical errors.
Color deviations to the original products may occur during the printing process.